

NACOmatic

Effective: 03-June-2010

Expires: 29-July-2010

Your Ad Here

~ 100,000 Page views/month

Contact:

Doug Ranz

248-318-0011

NACOmatic@hotmail.com

Warranty

I make absolutely no warranty nor guarantee whatsoever about the accuracy, availability, applicability and/or correctness of any of the information in this document.

The official, original NACO documents are available for your downloading pleasure from: <http://naco.faa.gov/index.asp?xml=naco/onlineproducts>

Copyright

This compilation is protected by US copyright laws and international copyright treaties.

Limitations

The sale, hosting and/or distribution of this document in any and all forms, is prohibited.

Release from Liability

All users of this compilation must agree to be legally bound hereby, that Douglas R. Ranz ("Released Party") SHALL NOT BE LIABLE FOR MY DEATH OR INJURY TO MY PERSON, OR FOR ANY LOSS FOR DAMAGE TO MY PROPERTY OR REPUTATION caused in any manner whatsoever, whether attributable to the negligence of the Released Party, or for any other reason, occurring during the time that I am operating an aircraft.

I do hereby waive any right of action against the Released Party from any and all causes or claims that I may have against them from the beginning of time. I further agree not to sue on any such cause or claim. This agreement shall not release liability for gross negligence or willful misconduct of the Released Party. I agree to indemnify and hold the Released Party harmless for any losses, judgments, damages or fees he may incur, including but not limited to attorneys fees, arising out any lawsuit related to the planning, flight and/or enforcement of or legal challenge to this agreement. It is my intention that this agreement be interpreted and enforced to the maximum extent allowed by Michigan law.

04W =>	49	DLH =>	39	RGK =>	71
04Y =>	47	DTL =>	38	ROS =>	74
05Y =>	48	DVP =>	79	ROX =>	73
06Y =>	48	DXX =>	54	RRT =>	84
07Y =>	48	DYT =>	40	RST =>	73
09I =>	50	ELO =>	41	RWF =>	72
09Y =>	50	ETH =>	86	RYM =>	71
10D =>	87	EVM =>	41	SAZ =>	80
12D =>	82	FBL =>	42	SBU =>	31
12Y =>	52	FCM =>	59	SGS =>	79
13Y =>	53	FFM =>	43	STC =>	75
14Y =>	53	FKA =>	70	STP =>	77
16D =>	68	FOZ =>	31	SYN =>	80
18Y =>	56	FRM =>	42	TKC =>	82
21D =>	76	FSE =>	44	TOB =>	38
22Y =>	63	GDB =>	46	TVF =>	81
23D =>	51	GHW =>	45	TWM =>	83
23Y =>	63	GPZ =>	46	ULM =>	64
25D =>	44	GYL =>	44	VVV =>	66
25Y =>	64	HCD =>	49	VWU =>	85
43Y =>	65	HCO =>	47	XVG =>	54
47Y =>	67	HIB =>	48		
48Y =>	68	HZX =>	56		
52Y =>	72	INL =>	50		
55Y =>	74	JKJ =>	61		
63Y =>	83	JMR =>	62		
68Y =>	85	JYG =>	75		
ACQ =>	85	LJF =>	52		
ADC =>	83	LVN =>	57		
AEL =>	27	LXL =>	53		
AIT =>	26	LYV =>	54		
ANE =>	57	MGG =>	55		
AQP =>	28	MIC =>	58		
AUM =>	28	MJQ =>	51		
AXN =>	27	MKT =>	55		
BBB =>	30	MML =>	56		
BDE =>	29	MOX =>	63		
BDH =>	86	MSP =>	60		
BFW =>	78	MVE =>	61		
BJI =>	30	MWM =>	87		
BRD =>	32	MZH =>	62		
CBG =>	34	ONA =>	87		
CDD =>	36	ORB =>	65		
CFE =>	33	OTG =>	88		
CHU =>	34	OVL =>	65		
CKC =>	45	OWA =>	66		
CKN =>	37	PEX =>	67		
CNB =>	35	PKD =>	67		
COQ =>	36	PNM =>	70		
CQM =>	36	PQN =>	69		
D00 =>	26	PWC =>	69		

GENERAL INFORMATION

This Airport/Facility Directory is a Civil Flight Information Publication published and distributed every eight weeks by the FAA, Department of Transportation, National Aeronautical Navigation Services, Silver Spring, Maryland 20910. It is designed for use with Aeronautical Charts covering the conterminous United States, Puerto Rico and the Virgin Islands.

This directory contains all open to the public airports, seaplane bases and heliports, military facilities, and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally, this directory contains communications data, navigational facilities and certain special notices and procedures.

Military data contained within this publication is provided by the National Geospatial-Intelligence Agency and is intended to provide reference data for military and/or joint civil/military airports. Not all military data contained in this publication is applicable to civil users.

CORRECTIONS, COMMENTS, AND/OR PROCUREMENT

CRITICAL information such as equipment malfunction, abnormal field conditions, hazards to flight, etc., should be reported as soon as possible to the nearest FAA facility, either in person or by reverse charge telephone call.

FOR AIRPORT SUPPLEMENT REVISIONS FORM VISIT WEB SITE: <http://nfdc.faa.gov/portal/airportchanges.do>

FAA, Aeronautical Information Services, ATO-R, Rm. 626
800 Independence Ave., SW
Washington, DC 20591
Telephone 1-866-295-8236
Fax 202-267-5322
Email 9-ATOR-HQ-AIS-AIRPORTCHANGES@FAA.GOV

NOTICE: Changes must be received by the Aeronautical Information Services as soon as possible but not later than the "cut-off" dates listed below to assure publication on the desired effective date.

Effective Date	Airport Information	Airspace Information*
	Cut-off date	Cut-off date
3 Jun 10	21 Apr 10	1 Apr 10
29 Jul 10	16 Jun 10	27 May 10
23 Sep 10	11 Aug 10	22 Jul 10
18 Nov 10	6 Oct 10	16 Sep 10
13 Jan 11	1 Dec 10	11 Nov 10
10 Mar 11	26 Jan 11	6 Jan 11

*Including changes to preferred routes and graphic depictions on charts.

FOR CHARTING ERRORS CONTACT:

FAA, National Aeronautical Navigation Services
SSMC-4 Sta. #4435
1305 East West Highway
Silver Spring, MD 20910-3281
Telephone 1-800-626-3677
Email 9-AMC-Aerochart@faa.gov

Frequently asked questions (FAQs) are answered on our website at <http://aeronav.faa.gov>.

See the FAQs prior to contact via toll free number.

FOR PROCUREMENT CONTACT:

FAA, National Aeronautical Navigation Services
REDIS/Distribution Team
10201 Good Luck Road
Glenn Dale, MD 20769-9700
Online at <http://aeronav.faa.gov>
Email 9-AMC-Chartsales@faa.gov
Telephone 1-800-638-8972
Fax 301-436-6829
or any authorized chart agent.

New or Changed Information—To alert users of new information or changes to information from the previous issue, a vertical line will be portrayed in the outside margin and extending the full length of the new and/or revised data. This will not apply to the front cover or the airport/facility directory listing.

This Airport/Facility Directory comprises part of the following sections of the United States Aeronautical Information Publication (AIP): GEN, ENR and AD.

TABLE OF CONTENTS

General Information.....	Inside Front Cover
Abbreviations	2
Directory Legend	4
Airport/Facility Directory	
Iowa.....	22
Kansas.....	71
Minnesota.....	126
Missouri	189
Nebraska.....	251
North Dakota.....	287
South Dakota.....	322
City/Military Airport Cross Reference.....	348
Seaplane Landing Areas	349
Special Notices.....	352
Regulatory Notices	359
FAA and National Weather Service	
Telephone Numbers	361
Key to Aviation Weather Reports	362
Air Traffic Facilities Telephone Numbers	364
Air Route Traffic Control Centers	366
Flight Service Station Communication Frequencies	368
Flight Standards District Offices.....	372
Routes/Waypoints	
Low Altitude Directional Routes	373
High Altitude Preferred Routes	374
High Altitude Directional Routes	377
Q-Routes.....	378
RNAV Routing Pitch and Catch Points	381
VFR Waypoints.....	392
VOR Receiver Check	400
Parachute Jumping Areas	405
Aeronautical Chart Bulletins	409
Supplemental Communication Reference	420
Airport Diagrams	426
National Weather Service (NWS) Upper Air Observing Stations	504
Enroute Flight Advisory Service (EFAS)	Inside Back Cover

ABBREVIATIONS

The following abbreviations/acronyms are those commonly used within this Directory. Other abbreviations/acronyms may be found in the Legend and are not duplicated below. The abbreviations presented are intended to represent grammatical variations of the basic form. (Example—"req" may mean "request", "requesting", "requested", or "requests").

AAF	Army Air Field	byd	beyond
AB	Airbase	C	Commercial Circuit (Telephone)
abv	above	CGAF	Coast Guard Air Facility
ACC	Air Combat Command; Area Control Center	CGAS	Coast Guard Air Station
acft	aircraft	CIV	Civil
ADCC	Air Defense Control Center	clsd	closed
AER	approach end rwy	comd	command
AFB	Air Force Base	CONUS	Continental United States
AFHP	Air Force Heliport	CSTMS	Customs
afld	airfield	ctc	contact
AFOD	US Army Flight Operations Detachment	ctl	control
AFRC	Armed Forces Reserve Center/Air Force Reserve Command	dalgt	daylight
AFSS	Automated Flight Service Station	Dec	December
AG	Agriculture	DIAP	DoD Instrument Approach Procedure
A-GEAR	Arresting Gear	DoD	Department of Defense
AGL	above ground level	DSN	Defense Switching Network (Telephone)
AHP	Army heliport	dspld	displaced
ALS	Approach Light System	durn	duration
alt	altitude	eff	effective
AMC	Air Mobility Command	emerg	emergency
ANGS	Air National Guard Station	EOR	End of Runway
apch	approach	ETA	Estimated Time of Arrival
Apr	April	ETD	Estimated Time of Departure
APU	Auxiliary Power Unit	exc	except
ARB	Air Reserve Base	extd	extend
arpt	airport	FBO	fixed-base operator
ARS	Air Reserve Station	Feb	February
AS	Air Station	fld	field
ASDE-X	Airport Surface Detection Equipment—Model X	FLIP	Flight Information Publication
ASU	Aircraft Starting Unit	flt	flight
ATC	Air Traffic Control	flw	follow
Aug	August	Fri	Friday
AUW	All Up Weight (gross weight)	FSS	Flight Service Station
avbl	available	GA	glide angle
bcn	beacon	GCA	Ground Controlled Approach
blo	below	GS	glide slope
		haz	hazard
		HQ	Headquarters

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

hr	hour	npi	non precision instrument
IAP	Instrument Approach Procedure	NS ABTMT	Noise Abatement
ICAO	International Civil Aviation Organization	NSTD	nonstandard
IFR	Instrument Flight Rules	ntc	notice
ILS	Instrument Landing System	obsn	observation
IM	Inner Marker	Oct	October
IMG	Immigration	OLF	Outlying Field
incr	increase	opr	operate, operator, operational
indef	indefinite	ops	operations
ints	intensity	OTS	out of service
invo	in the vicinity of	ovrn	overrun
IMC	Instrument Meteorological Conditions	PAEW	personnel and equipment working
Jan	January	pat	pattern
JASU	Jet Aircraft Starting Unit	p-line	power line
JOAP	Joint Oil Analysis Program	PMSV	Pilot-to-Metro Service
JOSAC	Joint Operational Support Airlift Center	POL	Petrol, Oils and Lubricants
JRB	Joint Reserve Base	PPR	prior permission required
Jul	July	PRM	Precision Runway Monitoring
Jun	June	PTD	Pilot to Dispatcher
Kt	Knots	RAMCC	Regional Air Movement Control Center
LAA	Local Airport Advisory	req	request
LAHSO	Land and Hold Short Operations	rgt tfc	right traffic
lbs	pounds	RON	Remain Overnight
ldg	landing	rqr	require
lgt	lighted	rstd	restricted
lgts	lights	RSRS	reduced same runway separation
LMM	Compass locator at Middle Marker ILS	rw	runway
LOC	Localizer	Sat	Saturday
LOM	Compass locator at Outer Marker ILS	SELF	Strategic Expeditionary Landing Field
ltd	limited	Sep	September
MACC	Military Area Control Center	SFA	Single Frequency Approach
Mar	March	sfc	surface
MCAF	Marine Corps Air Facility	SFRA	Special Flight Rules Area
MCALF	Marine Corps Auxiliary Landing Field	SOAP	Spectrometric Oil Analysis Program
MCAS	Marine Corps Air Station	SOF	Supervisor of Flying
MCB	Marine Corps Base	SPB	Seaplane Base
med	medium	SR	sunrise
METRO	Pilot-to-Metro voice call	SS	sunset
Mil	military	std	standard
min	minute	Sun	Sunday
MLS	Microwave Landing System	svc	service
MM	Middle Marker of ILS	tfc	traffic
Mon	Monday	thld	threshold
MP	Maintenance Period	Thu	Thursday
MSL	mean sea level	tkf	take-off
MSAW	minimum safe altitude warning	tmp	temporary
NAAS	Naval Auxiliary Air Station	tran	transient
NADC	Naval Air Development Center	Tue	Tuesday
NADEP	Naval Air Depot	twr	tower
NAEC	Naval Air Engineering Center	twy	taxiway
NAES	Naval Air Engineering Station	UC	Under Construction
NAF	Naval Air Facility	USA	United States Army
NALCO	Naval Air Logistics Control Office	USAF	United States Air Force
NALO	Navy Air Logistics Office	USCG	United States Coast Guard
NALF	Naval Auxiliary Landing Field	USN	United States Navy
NAS	Naval Air Station	V	Defense Switching Network (telephone, formerly AUTOVON)
NAWC	Naval Air Warfare Center	VFR	Visual Flight Rules
NAWS	Naval Air Weapons Station	VIP	Very Important Person
ngt	night	VMC	Visual Meteorological Conditions
NOLF	Naval Outlying Field	Wed	Wednesday
Nov	November	wx	weather

DIRECTORY LEGEND

SAMPLE

1 CITY NAME
2 AIRPORT NAME (ALTERNATE NAME) (LTS) (KLTS) CIV/MIL 3 N UTC-6(-5DT) N34°41.93' W99°20.20' JACKSONVILLE
4 200 B S4 FUEL 100 OX 1 TPA-1000(800) AOE Class IV, ARFF Index A NOTAM FILE ORL Not insp. COPTER
5 11 12 13 14 15 16 17 18 19 20 H-46, L-19C
6 IAP, DIAP, AD
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35

RWY 18-36: H12004X200 (ASPH-CONC-GRVD)
S-90, D-160, DT-300 PCN 80 R/B/W/T HIRL CL
RWY 18: LDIN. MALSF. TDZL. REIL. PAPI(P2R)—GA 3.0° TCH 36'.
Thld displcd 300'. Trees. Rgt tfc. 0.3% up.
RWY 36: ALSF1. 0.4% down.
RWY 09-27: H6000X150 (ASPH) MIRL
RWY 173-353: H3515X150 (ASPH-PFC) AUV PCN 59 F/A/W/T

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 18	09-27	6500
RWY 36	09-27	5400

RUNWAY DECLARED DISTANCE INFORMATION

RWY 18:	TORA-12004	TODA-12704	ASDA-11704	LDA-11504
RWY 36: <td>TORA-12004</td> <td>TODA-12004</td> <td>ASDA-12004</td> <td>LDA-11704</td>	TORA-12004	TODA-12004	ASDA-12004	LDA-11704

ARRESTING GEAR/SYSTEM

RWY 18 → HOOK E5 (65' OVRN) BAK-14 BAK-12B (1650')
BAK-14 BAK-12 (B) (1087') HOOK E5 (74' OVRN) ← **RWY 36**

MILITARY SERVICE: A-GEAR E-5 connected on dep end, disconnected on apch end. JASU 3(AM32A-60) 2(A/M32A-86)

FUEL J8(Mil) (NC-100, A) **FLUID** W SP PRESAIR LOX
OIL O-128 **TRAN ALERT** Avbl 1300-0200Z†, svc limited weekends.

AIRPORT REMARKS: Special Air Traffic Rules—Part 93, see Regulatory Notices. Attended 1200-0300Z†. Parachute Jumping. Deer invov arpt. Heavy jumbo jet training surface to 9000'. Twy A clsd indef. Flight Notification Service (ADCUS) avbl.

MILITARY REMARKS: ANG PPR/Official Business Only. Base OPS DSN 638-4390, C503-335-4222. Ctc Base OPS 15 minutes prior to ldg and after dep. Limited tran parking.

WEATHER DATA SOURCES: AWOS-1 120.3 (202) 426-8000. LLWAS.

COMMUNICATIONS: SFA ATIS 127.25 273.5 (202) 426-8003 UNICOM 122.95 PTD 372.2
NAME FSS (ORL) on arpt. 123.65 122.65 122.2
NAME RCO 112.2T 112.1R (NAME RADIO)
NAME APP/DEP CON 128.35 257.725 (1200-0400Z†)
TOWER 119.65 255.6 (1200-0400Z†) GND CON 121.7 GCO 135.075 (ORLANDO CLNC) CLNC DEL 125.55
NAME COMD POST (GERONIMO) 311.0 321.4 6761 PMSV METRO 239.8 NAME OPS 257.5

AIRSPACE: CLASS B See VFR Terminal Area Chart.

RADIO AIDS TO NAVIGATION: NOTAM FILE ORL. VHF/DF ctc FSS.
(H) VORTAC 112.2 MCO Chan 59 N28°32.55' W81°20.12' at fld. 1110/8E.
(H) TACAN Chan 29 CBU (109.2) N28°32.65' W81°21.12' at fld. 1115/8E.
HERNY NDB (LOM) 221 OR N28°37.40' W81°21.05' 177° 5.4 NM to fld.
ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.
ASR/PAR (1200-0400Z†)

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

HELIPAD H1: H100X75 (ASPH)
HELIPAD H2: H60X60 (ASPH)
HELIPORT REMARKS: Helipad H1 lctd on general aviation side and H2 lctd on air carrier side of arpt.
187 TPA 1000(813)
WATERWAY 15-33: 5000X425 (WATER)
SEAPLANE REMARKS: Birds roosting and feeding areas along river banks. Seaplanes operating adjacent to SW side of arpt not visible from twr and are required to ctc twr.

RWY 173-353: 3515 X 150

All bearings and radials are magnetic unless otherwise specified.
All mileages are nautical unless otherwise noted.

All times are Coordinated Universal Time (UTC) except as noted.











All elevations are in feet above/below Mean Sea Level (MSL) unless otherwise noted.

The horizontal reference datum of this publication is North American Datum of 1983 (NAD83), which for charting purposes is considered equivalent to World Geodetic System 1984 (WGS 84).
















10

SKETCH LEGEND







RUNWAYS/LANDING AREAS

Hard Surfaced	
Metal Surface	
Sod, Gravel, etc.	
Light Plane,	
Ski Landing Area or Water	
Under Construction	
Closed	
Helicopter Landings Area	
Displaced Threshold	
Taxiway, Apron and Stopways ..	






MISCELLANEOUS BASE AND CULTURAL FEATURES

Buildings	
Power Lines	
Fence	
Towers	
Tanks	
Oil Well	
Smoke Stack	
Obstruction	
Controlling Obstruction	
Trees	
Populated Places	
Cuts and Fills	
Cliffs and Depressions ..	
Ditch	
Hill	

RADIO AIDS TO NAVIGATION

















VORTAC ...		VOR	
VOR/DME ..		NDB	
TACAN		NDB/DME	

MISCELLANEOUS AERONAUTICAL FEATURES

Airport Beacon	
Wind Cone	
Landing Tee	
Tetrahedron	
Control Tower	

APPROACH LIGHTING SYSTEMS

A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A1) Negative symbology, e.g., (A1) (V) indicates Pilot Controlled Lighting (PCL).

Runway Centerline Lighting	
(A) Approach Lighting System ALSF-2 ..	
(A1) Approach Lighting System ALSF-1 ..	
(A2) Short Approach Lighting System SALS/SALSF	
(A3) Simplified Short Approach Lighting System (SSALR) with RAIL	
(A4) Medium Intensity Approach Lighting System (MALSR and MALSF)/(SSALS and SSALF)	
(A5) Medium Intensity Approach Lighting System (MALSR) and RAIL	
(+) Omnidirectional Approach Lighting System (ODALS)	
(D) Navy Parallel Row and Cross Bar ..	
(F) Air Force Overrun	
(V) Visual Approach Slope Indicator with Standard Threshold Clearance provided	
(V2) Pulsating Visual Approach Slope Indicator (PVASI)	
(V3) Visual Approach Slope Indicator with a threshold crossing height to accommodate long bodied or jumbo aircraft	
(V4) Tri-color Visual Approach Slope Indicator (TRCV)	
(V5) Approach Path Alignment Panel (APAP)	
(P) Precision Approach Path Indicator (PAPI)	

LEGEND

This directory is a listing of data on record with the FAA on all open to the public airports, military facilities and selected private use facilities specifically requested by the Department of Defense (DoD) for which a DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures Publication. Additionally this listing contains data for associated terminal control facilities, air route traffic control centers, and radio aids to navigation within the conterminous United States, Puerto Rico and the Virgin Islands. Joint civil/military and civil airports are listed alphabetically by state, associated city and airport name and cross-referenced by airport name. Military facilities are listed alphabetically by state and official airport name and cross-referenced by associated city name. Nav aids, flight service stations and remote communication outlets that are associated with an airport, but with a different name, are listed alphabetically under their own name, as well as under the airport with which they are associated.

The listing of an open to the public airport in this directory merely indicates the airport operator's willingness to accommodate transient aircraft, and does not represent that the facility conforms with any Federal or local standards, or that it has been approved for use on the part of the general public. Military and private use facilities published in this directory are open to civil pilots only in an emergency or with prior permission. See Special Notice Section, Civil Use of Military Fields.

The information on obstructions is taken from reports submitted to the FAA. Obstruction data has not been verified in all cases. Pilots are cautioned that objects not indicated in this tabulation (or on the airports sketches and/or charts) may exist which can create a hazard to flight operation. Detailed specifics concerning services and facilities tabulated within this directory are contained in the Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

The legend items that follow explain in detail the contents of this Directory and are keyed to the circled numbers on the sample on the preceding pages.

① CITY/AIRPORT NAME

Civil and joint civil/military airports and facilities in this directory are listed alphabetically by state and associated city. Where the city name is different from the airport name the city name will appear on the line above the airport name. Airports with the same associated city name will be listed alphabetically by airport name and will be separated by a dashed rule line. A solid rule line will separate all others. FAA approved helipads and seaplane landing areas associated with a land airport will be separated by a dotted line. Military airports are listed alphabetically by state and official airport name.

② ALTERNATE NAME

Alternate names, if any, will be shown in parentheses.

③ LOCATION IDENTIFIER

The location identifier is a three or four character FAA code followed by a four-character ICAO code assigned to airports. ICAO codes will only be published at joint civil/military, and military facilities. If two different military codes are assigned, both codes will be shown with the primary operating agency's code listed first. These identifiers are used by ATC in lieu of the airport name in flight plans, flight strips and other written records and computer operations. Zeros will appear with a slash to differentiate them from the letter "O".

④ OPERATING AGENCY

Airports within this directory are classified into two categories, Military/Federal Government and Civil airports open to the general public, plus selected private use airports. The operating agency is shown for military, private use and joint civil/military airports. The operating agency is shown by an abbreviation as listed below. When an organization is a tenant, the abbreviation is enclosed in parenthesis. No classification indicates the airport is open to the general public with no military tenant.

A	US Army	MC	Marine Corps
AFRC	Air Force Reserve Command	N	Navy
AF	US Air Force	NAF	Naval Air Facility
ANG	Air National Guard	NAS	Naval Air Station
AR	US Army Reserve	NASA	National Air and Space Administration
ARNG	US Army National Guard	P	US Civil Airport Wherein Permit Covers
CG	US Coast Guard		Use by Transient Military Aircraft
CIV/MIL	Joint Use Civil/Military	PVT	Private Use Only (Closed to the Public)
DND	Department of National Defense Canada		

⑤ AIRPORT LOCATION

Airport location is expressed as distance and direction from the center of the associated city in nautical miles and cardinal points, e.g., 4 NE.

⑥ TIME CONVERSION

Hours of operation of all facilities are expressed in Coordinated Universal Time (UTC) and shown as "Z" time. The directory indicates the number of hours to be subtracted from UTC to obtain local standard time and local daylight saving time UTC-5(-4DT). The symbol ‡ indicates that during periods of Daylight Saving Time effective hours will be one hour earlier than shown. In those areas where daylight saving time is not observed the (-4DT) and ‡ will not be shown. Daylight saving time is in effect from 0200 local time the second Sunday in March to 0200 local time the first Sunday in November. Canada and all U.S. Conterminous States observe daylight saving time except Arizona and Puerto Rico, and the Virgin Islands. If the state observes daylight saving time and the operating times are other than daylight saving times, the operating hours will include the dates, times and no ‡ symbol will be shown, i.e., April 15-Aug 31 0630-1700Z, Sep 1-Apr 14 0600-1700Z.

7 GEOGRAPHIC POSITION OF AIRPORT—AIRPORT REFERENCE POINT (ARP)

Positions are shown as hemisphere, degrees, minutes and hundredths of a minute and represent the approximate geometric center of all usable runway surfaces.

8 CHARTS

Charts refer to the Sectional Chart and Low and High Altitude Enroute Chart and panel on which the airport or facility is located. Helicopter Chart locations will be indicated as COPTER. IFR Gulf of Mexico West and IFR Gulf of Mexico Central will be depicted as GOMW and GOMC.

9 INSTRUMENT APPROACH PROCEDURES, AIRPORT DIAGRAM

IAP indicates an airport for which a prescribed (Public Use) FAA Instrument Approach Procedure has been published. DIAP indicates an airport for which a prescribed DoD Instrument Approach Procedure has been published in the U.S. Terminal Procedures. See the Special Notice Section of this directory, Civil Use of Military Fields and the Aeronautical Information Manual 5–4–5 Instrument Approach Procedure Charts for additional information. AD indicates an airport for which an airport diagram has been published. Airport diagrams are located in the back of each A/FD volume alphabetically by associated city and airport name.

10 AIRPORT SKETCH

The airport sketch, when provided, depicts the airport and related topographical information as seen from the air and should be used in conjunction with the text. It is intended as a guide for pilots in VFR conditions. Symbolology that is not self-explanatory will be reflected in the sketch legend. The airport sketch will be oriented with True North at the top. Airport sketches will be added incrementally.

11 ELEVATION

The highest point of an airport's usable runways measured in feet from mean sea level. When elevation is sea level it will be indicated as "00'". When elevation is below sea level a minus "–" sign will precede the figure.

12 ROTATING LIGHT BEACON

B indicates rotating beacon is available. Rotating beacons operate sunset to sunrise unless otherwise indicated in the AIRPORT REMARKS or MILITARY REMARKS segment of the airport entry.

13 SERVICING—CIVIL

S1: Minor airframe repairs.	S5: Major airframe repairs.
S2: Minor airframe and minor powerplant repairs.	S6: Minor airframe and major powerplant repairs.
S3: Major airframe and minor powerplant repairs.	S7: Major powerplant repairs.
S4: Major airframe and major powerplant repairs.	S8: Minor powerplant repairs.

14 FUEL

CODE	FUEL	CODE	FUEL
80	Grade 80 gasoline (Red)	B+	Jet B, Wide-cut, turbine fuel with FS-II*, FP** minus 50° C.
100	Grade 100 gasoline (Green)	J4 (JP4)	(JP–4 military specification) FP** minus 58° C.
100LL	100LL gasoline (low lead) (Blue)	J5 (JP5)	(JP–5 military specification) Kerosene with FS–11, FP** minus 46°C.
115	Grade 115 gasoline (115/145 military specification) (Purple)	J8 (JP8)	(JP–8 military specification) Jet A–1, Kerosene with FS–II*, FP** minus 47°C.
A	Jet A, Kerosene, without FS–II*, FP** minus 40° C.	J8+100	(JP–8 military specification) Jet A–1, Kerosene with FS–II*, FP** minus 47°C, with-fuel additive package that improves thermo stability characteristics of JP–8.
A+	Jet A, Kerosene, with FS–II*, FP** minus 40°C.	J	(Jet Fuel Type Unknown)
A1	Jet A–1, Kerosene, without FS–II*, FP** minus 47°C.	MOGAS	Automobile gasoline which is to be used as aircraft fuel.
A1+	Jet A–1, Kerosene with FS–II*, FP** minus 47° C.		
B	Jet B, Wide-cut, turbine fuel without FS–II*, FP** minus 50° C.		

*(Fuel System Icing Inhibitor)

**(Freeze Point)

NOTE: Certain automobile gasoline may be used in specific aircraft engines if a FAA supplemental type certificate has been obtained. Automobile gasoline, which is to be used in aircraft engines, will be identified as "MOGAS", however, the grade/type and other octane rating will not be published.

Data shown on fuel availability represents the most recent information the publisher has been able to acquire. Because of a variety of factors, the fuel listed may not always be obtainable by transient civil pilots. Confirmation of availability of fuel should be made directly with fuel suppliers at locations where refueling is planned.

15 OXYGEN—CIVIL

OX 1 High Pressure	OX 3 High Pressure—Replacement Bottles
OX 2 Low Pressure	OX 4 Low Pressure—Replacement Bottles

16 TRAFFIC PATTERN ALTITUDE

Traffic Pattern Altitude (TPA)—The first figure shown is TPA above mean sea level. The second figure in parentheses is TPA above airport elevation. Multiple TPA shall be shown as "TPA—See Remarks" and detailed information shall be shown in the Airport or Military Remarks Section. Traffic pattern data for USAF bases, USN facilities, and U.S. Army airports (including those on which ACC or U.S. Army is a tenant) that deviate from standard pattern altitudes shall be shown in Military Remarks.

17 AIRPORT OF ENTRY, LANDING RIGHTS, AND CUSTOMS USER FEE AIRPORTS

U.S. CUSTOMS USER FEE AIRPORT—Private Aircraft operators are frequently required to pay the costs associated with customs processing.

AOE—Airport of Entry. A customs Airport of Entry where permission from U.S. Customs is not required to land. However, at least one hour advance notice of arrival is required.

LRA—Landing Rights Airport. Application for permission to land must be submitted in advance to U.S. Customs. At least one hour advance notice of arrival is required.

NOTE: Advance notice of arrival at both an AOE and LRA airport may be included in the flight plan when filed in Canada or Mexico. Where Flight Notification Service (ADCUS) is available the airport remark will indicate this service. This notice will also be treated as an application for permission to land in the case of an LRA. Although advance notice of arrival may be relayed to Customs through Mexico, Canada, and U.S. Communications facilities by flight plan, the aircraft operator is solely responsible for ensuring that Customs receives the notification. (See Customs, Immigration and Naturalization, Public Health and Agriculture Department requirements in the International Flight Information Manual for further details.)

US Customs Air and Sea Ports, Inspectors and Agents

Northeast Sector (New England and Atlantic States—ME to MD)

407-975-1740

Southeast Sector (Atlantic States—DC, WV, VA to FL)

407-975-1780

Central Sector (Interior of the US, including Gulf states—MS, AL, LA)

407-975-1760

Southwest East Sector (OK and eastern TX)

407-975-1840

Southwest West Sector (Western TX, NM and AZ)

407-975-1820

Pacific Sector (WA, OR, CA, HI and AK)

407-975-1800

18 CERTIFICATED AIRPORT (14 CFR PART 139)

Airports serving Department of Transportation certified carriers and certified under 14 CFR part 139 are indicated by the Class and the ARFF Index; e.g. Class I, ARFF Index A, which relates to the availability of crash, fire, rescue equipment. Class I airports can have an ARFF Index A through E, depending on the aircraft length and scheduled departures. Class II, III, and IV will always carry an Index A.

14 CFR PART 139 CERTIFICATED AIRPORTS
AIRPORT CLASSIFICATIONS

Type of Air Carrier Operation	Class I	Class II	Class III	Class IV
Scheduled Air Carrier Aircraft with 31 or more passenger seats	X			
Unscheduled Air Carrier Aircraft with 31 or more passengers seats	X	X		X
Scheduled Air Carrier Aircraft with 10 to 30 passenger seats	X	X	X	

14 CFR—PART 139 CERTIFICATED AIRPORTS

INDICES AND AIRCRAFT RESCUE AND FIRE FIGHTING EQUIPMENT REQUIREMENTS

Airport Index	Required No. Vehicles	Aircraft Length	Scheduled Departures	Agent + Water for Foam
A	1	<90'	≥1	500#DC or HALON 1211 or 450#DC + 100 gal H ₂ O
B	1 or 2	≥90', <126' ----- ≥126', <159'	≥5 ----- <5	Index A + 1500 gal H ₂ O
C	2 or 3	≥126', <159' ----- ≥159', <200'	≥5 ----- <5	Index A + 3000 gal H ₂ O
D	3	≥159', <200' ----- >200'	<5	Index A + 4000 gal H ₂ O
E	3	≥200'	≥5	Index A + 6000 gal H ₂ O

> Greater Than; < Less Than; ≥ Equal or Greater Than; ≤ Equal or Less Than; H₂O—Water; DC—Dry Chemical.

NOTE: The listing of ARFF index does not necessarily assure coverage for non-air carrier operations or at other than prescribed times for air carrier. ARFF Index Ltd.—indicates ARFF coverage may or may not be available, for information contact airport manager prior to flight.

19 NOTAM SERVICE

All public use landing areas are provided NOTAM "D" (distant dissemination) and NOTAM "L" (local dissemination) service. Airport NOTAM file identifier is shown for individual airports, e.g. "NOTAM FILE IAD". See AIM, Basic Flight Information and

ATC Procedures for detailed description of NOTAM's. Current NOTAMs are available from Flight Service Stations at 1-800-WX-BRIEF. Real time Military NOTAMs are available using the DoD Internet NOTAM Distribution System (DINS) www.notams.jcs.mil.

20 FAA INSPECTION

All airports not inspected by FAA will be identified by the note: Not insp. This indicates that the airport information has been provided by the owner or operator of the field.

21 RUNWAY DATA

Runway information is shown on two lines. That information common to the entire runway is shown on the first line while information concerning the runway ends is shown on the second or following line. Runway direction, surface, length, width, weight bearing capacity, lighting, and slope, when available are shown for each runway. Multiple runways are shown with the longest runway first. Direction, length, width, and lighting are shown for sea-lanes. The full dimensions of helipads are shown, e.g., 50X150. Runway data that requires clarification will be placed in the remarks section.

RUNWAY DESIGNATION

Runways are normally numbered in relation to their magnetic orientation rounded off to the nearest 10 degrees. Parallel runways can be designated L (left)/R (right)/C (center). Runways may be designated as Ultralight or assault strips. Assault strips are shown by magnetic bearing.

RUNWAY DIMENSIONS

Runway length and width are shown in feet. Length shown is runway end to end including displaced thresholds, but excluding those areas designed as overruns.

RUNWAY SURFACE AND LENGTH

Runway lengths prefixed by the letter "H" indicate that the runways are hard surfaced (concrete, asphalt, or part asphalt-concrete). If the runway length is not prefixed, the surface is sod, clay, etc. The runway surface composition is indicated in parentheses after runway length as follows:

(AFSC)—Aggregate friction seal coat	(GRVL)—Gravel, or cinders	(PSP)—Pierced steel plank
(ASPH)—Asphalt	(MATS)—Pierced steel planking, landing mats, membranes	(RFSC)—Rubberized friction seal coat
(CONC)—Concrete	(PEM)—Part concrete, part asphalt	(TURF)—Turf
(DIRT)—Dirt	(PFC)—Porous friction courses	(TRTD)—Treated
(GRVD)—Grooved		(WC)—Wire combed

RUNWAY WEIGHT BEARING CAPACITY

Runway strength data shown in this publication is derived from available information and is a realistic estimate of capability at an average level of activity. It is not intended as a maximum allowable weight or as an operating limitation. Many airport pavements are capable of supporting limited operations with gross weights in excess of the published figures. Permissible operating weights, insofar as runway strengths are concerned, are a matter of agreement between the owner and user. When desiring to operate into any airport at weights in excess of those published in the publication, users should contact the airport management for permission. Runway strength figures are shown in thousand of pounds, with the last three figures being omitted. Add 000 to figure following S, D, 2S, 2T, AUW, SWL, etc., for gross weight capacity. A blank space following the letter designator is used to indicate the runway can sustain aircraft with this type landing gear, although definite runway weight bearing capacity figures are not available, e.g., S, D. Applicable codes for typical gear configurations with S=Single, D=Dual, T=Triple and Q=Quadruple:

CURRENT	NEW	NEW DESCRIPTION
S	S	Single wheel type landing gear (DC3), (C47), (F15), etc.
D	D	Dual wheel type landing gear (BE1900), (B737), (A319), etc.
T	D	Dual wheel type landing gear (P3, C9).
ST	2S	Two single wheels in tandem type landing gear (C130).
TRT	2T	Two triple wheels in tandem type landing gear (C17), etc.
DT	2D	Two dual wheels in tandem type landing gear (B707), etc.
TT	2D	Two dual wheels in tandem type landing gear (B757, KC135).
SBTT	2D/D1	Two dual wheels in tandem/dual wheel body gear type landing gear (KC10).
None	2D/2D1	Two dual wheels in tandem/two dual wheels in tandem body gear type landing gear (A340-600).
DDT	2D/2D2	Two dual wheels in tandem/two dual wheels in double tandem body gear type landing gear (B747, E4).
TTT	3D	Three dual wheels in tandem type landing gear (B777), etc.
TT	D2	Dual wheel gear two struts per side main gear type landing gear (B52).
TDT	C5	Complex dual wheel and quadruple wheel combination landing gear (C5).

AUW—All up weight. Maximum weight bearing capacity for any aircraft irrespective of landing gear configuration.

SWL—Single Wheel Loading. (This includes information submitted in terms of Equivalent Single Wheel Loading (ESWL) and Single Isolated Wheel Loading).

PSI—Pounds per square inch. PSI is the actual figure expressing maximum pounds per square inch runway will support, e.g., (SWL 000/PSI 535).

Omission of weight bearing capacity indicates information unknown.

The ACN/PCN System is the ICAO standard method of reporting pavement strength for pavements with bearing strengths greater than 12,500 pounds. The Pavement Classification Number (PCN) is established by an engineering assessment of the runway. The PCN is for use in conjunction with an Aircraft Classification Number (ACN). Consult the Aircraft Flight Manual, Flight Information Handbook, or other appropriate source for ACN tables or charts. Currently, ACN data may not be available for all aircraft. If an ACN table or chart is available, the ACN can be calculated by taking into account the aircraft weight, the pavement type, and the subgrade category. For runways that have been evaluated under the ACN/PCN system, the PCN will be shown as a five-part code (e.g. PCN 80 R/B/W/T). Details of the coded format are as follows:

- (1) The PCN NUMBER—The reported PCN indicates that an aircraft with an ACN equal or less than the reported PCN can operate on the pavement subject to any limitation on the tire pressure.
- (2) The type of pavement:
 - R — Rigid
 - F — Flexible
- (3) The pavement subgrade category:
 - A — High
 - B — Medium
 - C — Low
 - D — Ultra-low
- (4) The maximum tire pressure authorized for the pavement:
 - W — High, no limit
 - X — Medium, limited to 217 psi
 - Y — Low, limited to 145 psi
 - Z — Very low, limited to 73 psi
- (5) Pavement evaluation method:
 - T — Technical evaluation
 - U — By experience of aircraft using the pavement

NOTE: Prior permission from the airport controlling authority is required when the ACN of the aircraft exceeds the published PCN or aircraft tire pressure exceeds the published limits.

RUNWAY LIGHTING

Lights are in operation sunset to sunrise. Lighting available by prior arrangement only or operating part of the night and/or pilot controlled lighting with specific operating hours are indicated under airport or military remarks. At USN/USMC facilities lights are available only during airport hours of operation. Since obstructions are usually lighted, obstruction lighting is not included in this code. Unlighted obstructions on or surrounding an airport will be noted in airport or military remarks. Runway lights nonstandard (NSTD) are systems for which the light fixtures are not FAA approved L-800 series: color, intensity, or spacing does not meet FAA standards. Nonstandard runway lights, VASI, or any other system not listed below will be shown in airport remarks or military service. Temporary, emergency or limited runway edge lighting such as flares, smudge pots, lanterns or portable runway lights will also be shown in airport remarks or military service. Types of lighting are shown with the runway or runway end they serve.

NSTD—Light system fails to meet FAA standards.

LIRL—Low Intensity Runway Lights.

MIRL—Medium Intensity Runway Lights.

HIRL—High Intensity Runway Lights.

RAIL—Runway Alignment Indicator Lights.

REIL—Runway End Identifier Lights.

CL—Centerline Lights.

TDZL—Touchdown Zone Lights.

ODALS—Omni Directional Approach Lighting System.

AF OVRN—Air Force Overrun 1000' Standard Approach Lighting System.

LDIN—Lead-In Lighting System.

MALS—Medium Intensity Approach Lighting System.

MALSF—Medium Intensity Approach Lighting System with Sequenced Flashing Lights.

MALSR—Medium Intensity Approach Lighting System with Runway Alignment Indicator Lights.

SALS—Short Approach Lighting System.

SALSF—Short Approach Lighting System with Sequenced Flashing Lights.

SSALS—Simplified Short Approach Lighting System.

SSALF—Simplified Short Approach Lighting System with Sequenced Flashing Lights.

SSALR—Simplified Short Approach Lighting System with Runway Alignment Indicator Lights.

ALSAF—High Intensity Approach Lighting System with Sequenced Flashing Lights.

ALSF1—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category I, Configuration.

ALSF2—High Intensity Approach Lighting System with Sequenced Flashing Lights, Category II, Configuration.

SF—Sequenced Flashing Lights.

OLS—Optical Landing System.

WAVE—OFF.

NOTE: Civil ALSF2 may be operated as SSALR during favorable weather conditions. When runway edge lights are positioned more than 10 feet from the edge of the usable runway surface a remark will be added in the "Remarks" portion of the airport entry. This is applicable to Air Force, Air National Guard and Air Force Reserve Bases, and those joint civil/military airfields on which they are tenants.

VISUAL GLIDESLOPE INDICATORS

APAP—A system of panels, which may or may not be lighted, used for alignment of approach path.

PNIL APAP on left side of runway

PNIR APAP on right side of runway

PAPI—Precision Approach Path Indicator

P2L 2-identical light units placed on left side of runway

P4L 4-identical light units placed on left side of runway

P2R 2-identical light units placed on right side of runway

P4R 4-identical light units placed on right side of runway

PVASI—Pulsating/steady burning visual approach slope indicator, normally a single light unit projecting two colors.

PSIL PVASI on left side of runway

PSIR PVASI on right side of runway

SAVASI—Simplified Abbreviated Visual Approach Slope Indicator

S2L 2-box SAVASI on left side of runway

S2R 2-box SAVASI on right side of runway

TRCV—Tri-color visual approach slope indicator, normally a single light unit projecting three colors.

TRIL TRCV on left side of runway

TRIR TRCV on right side of runway

VASI—Visual Approach Slope Indicator

V2L 2-box VASI on left side of runway

V6L 6-box VASI on left side of runway

V2R 2-box VASI on right side of runway

V6R 6-box VASI on right side of runway

V4L 4-box VASI on left side of runway

V12 12-box VASI on both sides of runway

V4R 4-box VASI on right side of runway

V16 16-box VASI on both sides of runway

NOTE: Approach slope angle and threshold crossing height will be shown when available; i.e., -GA 3.5° TCH 37'.

PILOT CONTROL OF AIRPORT LIGHTING

Key Mike	Function
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-Off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-Off)

Available systems will be indicated in the airport or military remarks, e.g., ACTIVATE HIRL Rwy 07–25, MALSR Rwy 07, and VASI Rwy 07–122.8.

Where the airport is not served by an instrument approach procedure and/or has an independent type system of different specification installed by the airport sponsor, descriptions of the type lights, method of control, and operating frequency will be explained in clear text. See AIM, "Basic Flight Information and ATC Procedures," for detailed description of pilot control of airport lighting.

RUNWAY SLOPE

When available, runway slope data will only be provided for those airports with an approved FAA instrument approach procedure. Runway slope will be shown only when it is 0.3 percent or greater. On runways less than 8000 feet, the direction of the slope up will be indicated, e.g., 0.3% up NW. On runways 8000 feet or greater, the slope will be shown (up or down) on the runway end line, e.g., RWY 13: 0.3% up., RWY 21: Pole. Rgt tfc. 0.4% down.

RUNWAY END DATA

Information pertaining to the runway approach end such as approach lights, touchdown zone lights, runway end identification lights, visual glideslope indicators, displaced thresholds, controlling obstruction, and right hand traffic pattern, will be shown on the specific runway end. "Rgt tfc"—Right traffic indicates right turns should be made on landing and takeoff for specified runway end.

LAND AND HOLD SHORT OPERATIONS (LAHSO)

LAHSO is an acronym for "Land and Hold Short Operations." These operations include landing and holding short of an intersection runway, an intersecting taxiway, or other predetermined points on the runway other than a runway or taxiway. Measured distance represents the available landing distance on the landing runway, in feet.

Specific questions regarding these distances should be referred to the air traffic manager of the facility concerned. The Aeronautical Information Manual contains specific details on hold-short operations and markings.

RUNWAY DECLARED DISTANCE INFORMATION

TORA—Take-off Run Available. The length of runway declared available and suitable for the ground run of an aeroplane take-off.

TODA—Take-off Distance Available. The length of the take-off run available plus the length of the clearway, if provided.

ASDA—Accelerate-Stop Distance Available. The length of the take-off run available plus the length of the stopway, if provided.

LDA—Landing Distance Available. The length of runway which is declared available and suitable for the ground run of an aeroplane landing.

22 ARRESTING GEAR/SYSTEMS

Arresting gear is shown as it is located on the runway. The a-gear distance from the end of the appropriate runway (or into the overrun) is indicated in parentheses. A-Gear which has a bi-direction capability and can be utilized for emergency approach end engagement is indicated by a (B). The direction of engaging device is indicated by an arrow. Up to 15 minutes advance notice may be required for rigging A-Gear for approach and engagement. Airport listing may show availability of other than US Systems. This information is provided for emergency requirements only. Refer to current aircraft operating manuals for specific engagement weight and speed criteria based on aircraft structural restrictions and arresting system limitations.

Following is a list of current systems referenced in this publication identified by both Air Force and Navy terminology:

BI-DIRECTIONAL CABLE (B)

<u>TYPE</u>	<u>DESCRIPTION</u>
BAK-9	Rotary friction brake.
BAK-12A	Standard BAK-12 with 950 foot run out, 1-inch cable and 40,000 pound weight setting. Rotary friction brake.
BAK-12B	Extended BAK-12 with 1200 foot run, 1¼ inch Cable and 50,000 pounds weight setting. Rotary friction brake.
E28	Rotary Hydraulic (Water Brake).
M21	Rotary Hydraulic (Water Brake) Mobile.

The following device is used in conjunction with some aircraft arresting systems:

BAK-14	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to five seconds to fully raise the cable.)
H	A device that raises a hook cable out of a slot in the runway surface and is remotely positioned for engagement by the tower on request. (In addition to personnel reaction time, the system requires up to one and one-half seconds to fully raise the cable.)

UNI-DIRECTIONAL CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>
MB60	Textile brake—an emergency one-time use, modular braking system employing the tearing of specially woven textile straps to absorb the kinetic energy.
E5/E5-1/E5-3	Chain Type. At USN/USMC stations E-5 A-GEAR systems are rated, e.g., E-5 RATING-13R-1100 HW (DRY), 31L/R-1200 STD (WET). This rating is a function of the A-GEAR chain weight and length and is used to determine the maximum aircraft engaging speed. A dry rating applies to a stabilized surface (dry or wet) while a wet rating takes into account the amount (if any) of wet overrun that is not capable of withstanding the aircraft weight. These ratings are published under Military Service.

FOREIGN CABLE

<u>TYPE</u>	<u>DESCRIPTION</u>	<u>US EQUIVALENT</u>
44B-3H	Rotary Hydraulic (Water Brake)	
CHAG	Chain	E-5

UNI-DIRECTIONAL BARRIER

<u>TYPE</u>	<u>DESCRIPTION</u>
MA-1A	Web barrier between stanchions attached to a chain energy absorber.
BAK-15	Web barrier between stanchions attached to an energy absorber (water squeezer, rotary friction, chain). Designed for wing engagement.

NOTE: Landing short of the runway threshold on a runway with a BAK-15 in the underrun is a significant hazard. The barrier in the down position still protrudes several inches above the underrun. Aircraft contact with the barrier short of the runway threshold can cause damage to the barrier and substantial damage to the aircraft.

OTHER

<u>TYPE</u>	<u>DESCRIPTION</u>
EMAS	Engineered Material Arresting System, located beyond the departure end of the runway, consisting of high energy absorbing materials which will crush under the weight of an aircraft.

23 MILITARY SERVICE

Specific military services available at the airport are listed under this general heading. Remarks applicable to any military service are shown in the individual service listing.

24 JET AIRCRAFT STARTING UNITS (JASU)

The numeral preceding the type of unit indicates the number of units available. The absence of the numeral indicates ten or more units available. If the number of units is unknown, the number one will be shown. Absence of JASU designation indicates non-availability.

The following is a list of current JASU systems referenced in this publication:

USAF JASU (For variations in technical data, refer to T.O. 35-1-7.)

ELECTRICAL STARTING UNITS:

A/M32A-86	AC: 115/200v, 3 phase, 90 kva, 0.8 pf, 4 wire DC: 28v, 1500 amp, 72 kw (with TR pack)
MC-1A	AC: 115/208v, 400 cycle, 3 phase, 37.5 kva, 0.8 pf, 108 amp, 4 wire DC: 28v, 500 amp, 14 kw
MD-3	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3A	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 1500 amp, 45 kw, split bus
MD-3M	AC: 115/208v, 400 cycle, 3 phase, 60 kva, 0.75 pf, 4 wire DC: 28v, 500 amp, 15 kw

MD-4	AC: 120/208v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 175 amp, "WYE" neutral ground, 4 wire, 120v, 400 cycle, 3 phase, 62.5 kva, 0.8 pf, 303 amp, "DELTA" 3 wire, 120v, 400 cycle, 1 phase, 62.5 kva, 0.8 pf, 520 amp, 2 wire
AIR STARTING UNITS	
AM32-95	150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- 2 psia
AM32A-95	150 +/- 5 lb/min @ 49 +/- 2 psia (35 +/- 2 psig)
LASS	150 +/- 5 lb/min @ 49 +/- 2 psia
MA-1A	82 lb/min (1123 cfm) at 130° air inlet temp, 45 psia (min) air outlet press
MC-1	15 cfm, 3500 psia
MC-1A	15 cfm, 3500 psia
MC-2A	15 cfm, 200 psia
MC-11	8,000 cu in cap, 4000 psig, 15 cfm
COMBINED AIR AND ELECTRICAL STARTING UNITS:	
AGPU	AC: 115/200v, 400 cycle, 3 phase, 30 kw gen DC: 28v, 700 amp AIR: 60 lb/min @ 40 psig @ sea level
AM32A-60*	AIR: 120 +/- 4 lb/min (1644 +/- 55 cfm) at 49 +/- 2 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire, 120v, 1 phase, 25 kva DC: 28v, 500 amp, 15 kw
AM32A-60A	AIR: 150 +/- 5 lb/min (2055 +/- 68 cfm) at 51 +/- psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw
AM32A-60B*	AIR: 130 lb/min, 50 psia AC: 120/208v, 400 cycle, 3 phase, 75 kva, 0.75 pf, 4 wire DC: 28v, 200 amp, 5.6 kw
*NOTE: During combined air and electrical loads, the pneumatic circuitry takes preference and will limit the amount of electrical power available.	
USN JASU	
ELECTRICAL STARTING UNITS:	
NC-8A/A1	DC: 500 amp constant, 750 amp intermittent, 28v; AC: 60 kva @ .8 pf, 115/200v, 3 phase, 400 Hz.
NC-10A/A1/B/C	DC: 750 amp constant, 1000 amp intermittent, 28v; AC: 90 kva, 115/200v, 3 phase, 400 Hz.
AIR STARTING UNITS:	
GTC-85/GTE-85	120 lbs/min @ 45 psi.
MSU-200NAV/A/U47A-5	204 lbs/min @ 56 psia.
WELLS AIR START SYSTEM	180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. Simultaneous multiple start capability.
COMBINED AIR AND ELECTRICAL STARTING UNITS:	
NCPP-105/RCPT	180 lbs/min @ 75 psi or 120 lbs/min @ 45 psi. 700 amp, 28v DC. 120/208v, 400 Hz AC, 30 kva.
JASU (ARMY)	
59B2-1B	28v, 7.5 kw, 280 amp.
OTHER JASU	
ELECTRICAL STARTING UNITS (DND):	
CE12	AC 115/200v, 140 kva, 400 Hz, 3 phase
CE13	AC 115/200v, 60 kva, 400 Hz, 3 phase
CE14	AC/DC 115/200v, 140 kva, 400 Hz, 3 phase, 28vDC, 1500 amp
CE15	DC 22-35v, 500 amp continuous 1100 amp intermittent
CE16	DC 22-35v, 500 amp continuous 1100 amp intermittent soft start
AIR STARTING UNITS (DND):	
CA2	ASA 45.5 psig, 116.4 lb/min
COMBINED AIR AND ELECTRICAL STARTING UNITS (DND)	
CEA1	AC 120/208v, 60 kva, 400 Hz, 3 phase DC 28v, 75 amp AIR 112.5 lb/min, 47 psig
ELECTRICAL STARTING UNITS (OTHER)	
C-26	28v 45kw 115-200v 15kw 380-800 Hz 1 phase 2 wire
C-26-B, C-26-C	28v 45kw: Split Bus: 115-200v 15kw 380-800 Hz 1 phase 2 wire
E3	DC 28v/10kw
AIR STARTING UNITS (OTHER):	
A4	40 psi/2 lb/sec (LPAS Mk12, Mk12L, Mk12A, Mk1, Mk2B)
MA-1	150 Air HP, 115 lb/min 50 psia
MA-2	250 Air HP, 150 lb/min 75 psia
CARTRIDGE:	
MXU-4A	USAF

(25) FUEL—MILITARY

Fuel available through US Military Base supply, DESC Into-Plane Contracts and/or reciprocal agreement is listed first and is followed by (Mil). At commercial airports where Into-Plane contracts are in place, the name of the refueling agent is shown. Military fuel should be used first if it is available. When military fuel cannot be obtained but Into-Plane contract fuel is available, Government aircraft must refuel with the contract fuel and applicable refueling agent to avoid any breach in contract terms and conditions. Fuel not available through the above is shown preceded by NC (no contract). When fuel is obtained from NC sources, local purchase procedures must be followed. The US Military Aircraft Identaplates DD Form 1896 (Jet Fuel), DD Form 1897 (Avgas) and AF Form 1245 (Avgas) are used at military installations only. The US Government Aviation Into-Plane Reimbursement (AIR) Card (currently issued by AVCARD) is the instrument to be used to obtain fuel under a DESC Into-Plane Contract and for NC purchases if the refueling agent at the commercial airport accepts the AVCARD. A current list of contract fuel locations is available online at www.desc.dla.mil/Static/ProductsAndServices.asp; click on the Commercial Airports button.

See legend item 14 for fuel code and description.

(26) SUPPORTING FLUIDS AND SYSTEMS—MILITARY**CODE**

ADI	Anti-Detonation Injection Fluid—Reciprocating Engine Aircraft.
W	Water Thrust Augmentation—Jet Aircraft.
WAI	Water-Alcohol Injection Type, Thrust Augmentation—Jet Aircraft.
SP	Single Point Refueling.
PRESAIR	Air Compressors rated 3,000 PSI or more.
De-Ice	Anti-icing/De-icing/Defrosting Fluid (MIL-A-8243).

OXYGEN:

LPOX	Low pressure oxygen servicing.
HPOX	High pressure oxygen servicing.
LHOX	Low and high pressure oxygen servicing.
LOX	Liquid oxygen servicing.
ORXB	Oxygen replacement bottles. (Maintained primarily at Naval stations for use in acft where oxygen can be replenished only by replacement of cylinders.)
OX	Indicates oxygen servicing when type of servicing is unknown.

NOTE: Combinations of above items is used to indicate complete oxygen servicing available;

LHOXRB	Low and high pressure oxygen servicing and replacement bottles;
LPOXRB	Low pressure oxygen replacement bottles only, etc.

NOTE: Aircraft will be serviced with oxygen procured under military specifications only. Aircraft will not be serviced with medical oxygen.

NITROGEN:

LPNIT	Low pressure nitrogen servicing.
HPNIT	High pressure nitrogen servicing.
LHNIT	Low and high pressure nitrogen servicing.

(27) OIL—MILITARY

US AVIATION OILS (MIL SPECS):

CODE	GRADE, TYPE
O-113	1065, Reciprocating Engine Oil (MIL-L-6082)
O-117	1100, Reciprocating Engine Oil (MIL-L-6082)
O-117+	1100, O-117 plus cyclohexanone (MIL-L-6082)
O-123	1065, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type III)
O-128	1100, (Dispersant), Reciprocating Engine Oil (MIL-L-22851 Type II)
O-132	1005, Jet Engine Oil (MIL-L-6081)
O-133	1010, Jet Engine Oil (MIL-L-6081)
O-147	None, MIL-L-6085A Lubricating Oil, Instrument, Synthetic
O-148	None, MIL-L-7808 (Synthetic Base) Turbine Engine Oil
O-149	None, Aircraft Turbine Engine Synthetic, 7.5c St
O-155	None, MIL-L-6086C, Aircraft, Medium Grade
O-156	None, MIL-L-23699 (Synthetic Base), Turboprop and Turboshaft Engines
JOAP/SOAP	Joint Oil Analysis Program. JOAP support is furnished during normal duty hours, other times on request. (JOAP and SOAP programs provide essentially the same service, JOAP is now the standard joint service supported program.)

(28) TRANSIENT ALERT (TRAN ALERT)—MILITARY

Tran Alert service is considered to include all services required for normal aircraft turn-around, e.g., servicing (fuel, oil, oxygen, etc.), debriefing to determine requirements for maintenance, minor maintenance, inspection and parking assistance of transient aircraft. Drag chute repack, specialized maintenance, or extensive repairs will be provided within the capabilities and priorities of the base. Delays can be anticipated after normal duty hours/holidays/weekends regardless of the hours of transient maintenance operation. Pilots should not expect aircraft to be serviced for TURN-AROUNDS during time periods when servicing or maintenance manpower is not available. In the case of airports not operated exclusively by US military, the servicing indicated by the remarks will not always be available for US military

aircraft. When transient alert services are not shown, facilities are unknown. NO PRIORITY BASIS—means that transient alert services will be provided only after all the requirements for mission/tactical assigned aircraft have been accomplished.

29 AIRPORT REMARKS

The Attendance Schedule is the months, days and hours the airport is actually attended. Airport attendance does not mean watchman duties or telephone accessibility, but rather an attendant or operator on duty to provide at least minimum services (e.g., repairs, fuel, transportation).

Airport Remarks have been grouped in order of applicability. Airport remarks are limited to those items of information that are determined essential for operational use, i.e., conditions of a permanent or indefinite nature and conditions that will remain in effect for more than 30 days concerning aeronautical facilities, services, maintenance available, procedures or hazards, knowledge of which is essential for safe and efficient operation of aircraft. Information concerning permanent closing of a runway or taxiway will not be shown. A note "See Special Notices" shall be applied within this remarks section when a special notice applicable to the entry is contained in the Special Notices section of this publication.

Parachute Jumping indicates parachute jumping areas associated with the airport. See Parachute Jumping Area section of this publication for additional information.

Landing Fee indicates landing charges for private or non-revenue producing aircraft. In addition, fees may be charged for planes that remain over a couple of hours and buy no services, or at major airline terminals for all aircraft.

Note: Unless otherwise stated, remarks including runway ends refer to the runway's approach end.

30 MILITARY REMARKS

Military Remarks published at a joint Civil/Military facility are remarks that are applicable to the Military. At Military Facilities all remarks will be published under the heading Military Remarks. Remarks contained in this section may not be applicable to civil users. The first group of remarks is applicable to the primary operator of the airport. Remarks applicable to a tenant on the airport are shown preceded by the tenant organization, i.e., (A) (AF) (N) (ANG), etc. Military airports operate 24 hours unless otherwise specified. Airport operating hours are listed first (airport operating hours will only be listed if they are different than the airport attended hours or if the attended hours are unavailable) followed by pertinent remarks in order of applicability. Remarks will include information on restrictions, hazards, traffic pattern, noise abatement, customs/agriculture/immigration, and miscellaneous information applicable to the Military.

Type of restrictions:

CLOSED: When designated closed, the airport is restricted from use by all aircraft unless stated otherwise. Any closure applying to specific type of aircraft or operation will be so stated. USN/USMC/USAF airports are considered closed during non-operating hours. Closed airports may be utilized during an emergency provided there is a safe landing area.

OFFICIAL BUSINESS ONLY: The airfield is closed to all transient military aircraft for obtaining routine services such as fueling, passenger drop off or pickup, practice approaches, parking, etc. The airfield may be used by aircrews and aircraft if official government business (including civilian) must be conducted on or near the airfield and prior permission is received from the airfield manager.

AF OFFICIAL BUSINESS ONLY OR NAVY OFFICIAL BUSINESS ONLY: Indicates that the restriction applies only to service indicated.

PRIOR PERMISSION REQUIRED (PPR): Airport is closed to transient aircraft unless approval for operation is obtained from the appropriate commander through Chief, Airfield Management or Airfield Operations Officer. Official Business or PPR does not preclude the use of US Military airports as an alternate for IFR flights. If a non-US military airport is used as a weather alternate and requires a PPR, the PPR must be requested and confirmed before the flight departs. The purpose of PPR is to control volume and flow of traffic rather than to prohibit it. Prior permission is required for all aircraft requiring transient alert service outside the published transient alert duty hours. All aircraft carrying hazardous materials must obtain prior permission as outlined in AFJI 11-204, AR 95-27, OPNAVINST 3710.7.

Note: OFFICIAL BUSINESS ONLY AND PPR restrictions are not applicable to Special Air Mission (SAM) or Special Air Resource (SPAR) aircraft providing person or persons on board are designated Code 6 or higher as explained in AFJMAN 11-213, AR 95-11, OPNAVINST 3722-8J. Official Business Only or PPR do not preclude the use of the airport as an alternate for IFR flights.

31 WEATHER DATA SOURCES

Weather data sources will be listed alphabetically followed by their assigned frequencies and/or telephone number and hours of operation.

ASOS—Automated Surface Observing System. Reports the same as an AWOS-3 plus precipitation identification and intensity, and freezing rain occurrence (future enhancement).

AWOS—Automated Weather Observing System

AWOS-A—reports altimeter setting (all other information is advisory only).

AWOS-1—reports altimeter setting, wind data and usually temperature, dewpoint and density altitude.

AWOS-2—reports the same as AWOS-1 plus visibility.

AWOS-3—reports the same as AWOS-1 plus visibility and cloud/ceiling data.

See AIM, Basic Flight Information and ATC Procedures for detailed description of AWOS.

HIWAS—See RADIO AIDS TO NAVIGATION

LAWRS—Limited Aviation Weather Reporting Station where observers report cloud height, weather, obstructions to vision, temperature and dewpoint (in most cases), surface wind, altimeter and pertinent remarks.

LLWAS—indicates a Low Level Wind Shear Alert System consisting of a center field and several field perimeter anemometers. SAWRS—identifies airports that have a Supplemental Aviation Weather Reporting Station available to pilots for current weather information.

SWSL—Supplemental Weather Service Location providing current local weather information via radio and telephone.

TDWR—indicates airports that have Terminal Doppler Weather Radar.

WSP—indicates airports that have Weather System Processor.

When the automated weather source is broadcast over an associated airport NAVAID frequency (see NAVAID line), it shall be indicated by a bold ASOS, AWOS, or HIWAS followed by the frequency, identifier and phone number, if available.

32 COMMUNICATIONS

Airport terminal control facilities and radio communications associated with the airport shall be shown. When the call sign is not the same as the airport name the call sign will be shown. Frequencies shall normally be shown in descending order with the primary frequency listed first. Frequencies will be listed, together with sectorization indicated by outbound radials, and hours of operation. Communications will be listed in sequence as follows:

Single Frequency Approach (SFA), Common Traffic Advisory Frequency (CTAF), Automatic Terminal Information Service (ATIS) and Aeronautical Advisory Stations (UNICOM) or (AUNICOM) along with their frequency is shown, where available, on the line following the heading "COMMUNICATIONS." When the CTAF and UNICOM frequencies are the same, the frequency will be shown as CTAF/UNICOM 122.8.

The FSS telephone nationwide is toll free 1-800-WX-BRIEF (1-800-992-7433). When the FSS is located on the field it will be indicated as "on aprt". Frequencies available at the FSS will follow in descending order. Remote Communications Outlet (RCO) providing service to the airport followed by the frequency and FSS RADIO name will be shown when available.

FSS's provide information on airport conditions, radio aids and other facilities, and process flight plans. Airport Advisory Service (AAS) is provided on the CTAF by FSS's for select non-tower airports or airports where the tower is not in operation. (See AIM, Para 4-1-9 Traffic Advisory Practices at Airports Without Operating Control Towers or AC 90-42C.)

Aviation weather briefing service is provided by FSS specialists. Flight and weather briefing services are also available by calling the telephone numbers listed.

Remote Communications Outlet (RCO)—An unmanned air/ground communications facility that is remotely controlled and provides UHF or VHF communications capability to extend the service range of an FSS.

Civil Communications Frequencies—Civil communications frequencies used in the FSS air/ground system are operated on 122.0, 122.2, 123.6; emergency 121.5; plus receive-only on 122.1.

- a. 122.0 is assigned as the Enroute Flight Advisory Service frequency at selected FSS RADIO outlets.
- b. 122.2 is assigned as a common enroute frequency.
- c. 123.6 is assigned as the airport advisory frequency at select non-tower locations. At airports with a tower, FSS may provide airport advisories on the tower frequency when tower is closed.
- d. 122.1 is the primary receive-only frequency at VOR's.
- e. Some FSS's are assigned 50 kHz frequencies in the 122-126 MHz band (eg. 122.45). Pilots using the FSS A/G system should refer to this directory or appropriate charts to determine frequencies available at the FSS or remote facility through which they wish to communicate.

Emergency frequency 121.5 and 243.0 are available at all Flight Service Stations, most Towers, Approach Control and RADAR facilities.

Frequencies published followed by the letter "T" or "R", indicate that the facility will only transmit or receive respectively on that frequency. All radio aids to navigation (NAVAID) frequencies are transmit only.

TERMINAL SERVICES

SFA—Single Frequency Approach.

CTAF—A program designed to get all vehicles and aircraft at airports without an operating control tower on a common frequency.

ATIS—A continuous broadcast of recorded non-control information in selected terminal areas.

D-ATIS—Digital ATIS provides ATIS information in text form outside the standard reception range of conventional ATIS via landline & data link communications and voice message within range of existing transmitters.

AUNICOM—Automated UNICOM is a computerized, command response system that provides automated weather, radio check capability and airport advisory information selected from an automated menu by microphone clicks.

UNICOM—A non-government air/ground radio communications facility which may provide airport information.

PTD—Pilot to Dispatcher.

APP CON—Approach Control. The symbol **Ⓡ** indicates radar approach control.


TOWER—Control tower.

GCA—Ground Control Approach System.

GND CON—Ground Control.

GCO—Ground Communication Outlet—An unstaffed, remotely controlled, ground/ground communications facility. Pilots at uncontrolled airports may contact ATC and FSS via VHF to a telephone connection to obtain an instrument clearance or close a VFR or IFR flight plan. They may also get an updated weather briefing prior to takeoff. Pilots will use four "key clicks" on the

VHF radio to contact the appropriate ATC facility or six "key clicks" to contact the FSS. The GCO system is intended to be used only on the ground.

DEP CON—Departure Control. The symbol  indicates radar departure control.

CLNC DEL—Clearance Delivery.

PRE TAXI CLNC—Pre taxi clearance.

VFR ADVSY SVC—VFR Advisory Service. Service provided by Non-Radar Approach Control.

Advisory Service for VFR aircraft (upon a workload basis) ctc APP CON.

COMD POST—Command Post followed by the operator call sign in parenthesis.

PMSV—Pilot-to-Metro Service call sign, frequency and hours of operation, when full service is other than continuous.

PMSV installations at which weather observation service is available shall be indicated, following the frequency and/or hours of operation as "Wx obsn svc 1900-0000Z+" or "other times" may be used when no specific time is given. PMSV facilities manned by forecasters are considered "Full Service". PMSV facilities manned by weather observers are listed as "Limited Service".

OPS—Operations followed by the operator call sign in parenthesis.

CON

RANGE

FLT FLW—Flight Following

MEDIVAC

NOTE: Communication frequencies followed by the letter "X" indicate frequency available on request.

AIRSPACE

Information concerning Class B, C, and part-time D and E surface area airspace shall be published with effective times.

Class D and E surface area airspace that is continuous as established by Rulemaking Docket will not be shown.

CLASS B—Radar Sequencing and Separation Service for all aircraft in CLASS B airspace.

CLASS C—Separation between IFR and VFR aircraft and sequencing of VFR arrivals to the primary airport.

TRSA—Radar Sequencing and Separation Service for participating VFR Aircraft within a Terminal Radar Service Area.

Class C, D, and E airspace described in this publication is that airspace usually consisting of a 5 NM radius core surface area that begins at the surface and extends upward to an altitude above the airport elevation (charted in MSL for Class C and Class D). Class E surface airspace normally extends from the surface up to but not including the overlying controlled airspace.

When part-time Class C or Class D airspace defaults to Class E, the core surface area becomes Class E. This will be formatted as:

AIRSPACE: CLASS C svc "times" ctc **APP CON** other times CLASS E:

or

AIRSPACE: CLASS D svc "times" other times CLASS E.

When a part-time Class C, Class D or Class E surface area defaults to Class G, the core surface area becomes Class G up to, but not including, the overlying controlled airspace. Normally, the overlying controlled airspace is Class E airspace beginning at either 700' or 1200' AGL. This will be formatted as:

AIRSPACE: CLASS C svc "times" ctc **APP CON** other times CLASS G, with CLASS E 700' (or 1200') AGL & abv:

or

AIRSPACE: CLASS D svc "times" other times CLASS G with CLASS E 700' (or 1200') AGL & abv:

or

AIRSPACE: CLASS E svc "times" other times CLASS G with CLASS E 700' (or 1200') AGL & abv.

NOTE: AIRSPACE SVC "TIMES" INCLUDE ALL ASSOCIATED ARRIVAL EXTENSIONS. Surface area arrival extensions for instrument approach procedures become part of the primary core surface area. These extensions may be either Class D or Class E airspace and are effective concurrent with the times of the primary core surface area. For example, when a part-time Class C, Class D or Class E surface area defaults to Class G, the associated arrival extensions will default to Class G at the same time. When a part-time Class C or Class D surface area defaults to Class E, the arrival extensions will remain in effect as Class E airspace.

NOTE: CLASS E AIRSPACE EXTENDING UPWARD FROM 700 FEET OR MORE ABOVE THE SURFACE, DESIGNATED IN CONJUNCTION WITH AN AIRPORT WITH AN APPROVED INSTRUMENT PROCEDURE.

Class E 700' AGL (shown as magenta vignette on sectional charts) and 1200' AGL (blue vignette) areas are designated when necessary to provide controlled airspace for transitioning to/from the terminal and enroute environments. Unless otherwise specified, these 700'/1200' AGL Class E airspace areas remain in effect continuously, regardless of airport operating hours or surface area status. These transition areas should not be confused with surface areas or arrival extensions.

(See Chapter 3, AIRSPACE, in the Aeronautical Information Manual for further details)

CONTINUED FROM PRECEDING PAGE

The term VOR is, operationally, a general term covering the VHF omnidirectional bearing type of facility without regard to the fact that the power, the frequency protected service volume, the equipment configuration, and operational requirements may vary between facilities at different locations.

AB _____	Automatic Weather Broadcast.
DF _____	Direction Finding Service.
DME _____	UHF standard (TACAN compatible) distance measuring equipment.
DME(Y) _____	UHF standard (TACAN compatible) distance measuring equipment that require TACAN to be placed in the "Y" mode to receive DME.
GS _____	Glide slope.
H _____	Non-directional radio beacon (homing), power 50 watts to less than 2,000 watts (50 NM at all altitudes).
HH _____	Non-directional radio beacon (homing), power 2,000 watts or more (75 NM at all altitudes).
H-SAB _____	Non-directional radio beacons providing automatic transcribed weather service.
ILS _____	Instrument Landing System (voice, where available, on localizer channel).
IM _____	Inner marker.
ISMLS _____	Interim Standard Microwave Landing System.
LDA _____	Localizer Directional Aid.
LMM _____	Compass locator station when installed at middle marker site (15 NM at all altitudes).
LOM _____	Compass locator station when installed at outer marker site (15 NM at all altitudes).
MH _____	Non-directional radio beacon (homing) power less than 50 watts (25 NM at all altitudes).
MLS _____	Microwave Landing System.
MM _____	Middle marker.
OM _____	Outer marker.
S _____	Simultaneous range homing signal and/or voice.
SABH _____	Non-directional radio beacon not authorized for IFR or ATC. Provides automatic weather broadcasts.
SDF _____	Simplified Direction Facility.
TACAN _____	UHF navigational facility-omnidirectional course and distance information.
VOR _____	VHF navigational facility-omnidirectional course only.
VOR/DME _____	Collocated VOR navigational facility and UHF standard distance measuring equipment.
VORTAC _____	Collocated VOR and TACAN navigational facilities.
W _____	Without voice on radio facility frequency.
Z _____	VHF station location marker at a LF radio facility.

ILS FACILITY PERFORMANCE CLASSIFICATION CODES

Codes define the ability of an ILS to support autoland operations. The two portions of the code represent Official Category and farthest point along a Category I, II, or III approach that the Localizer meets Category III structure tolerances.

Official Category: I, II, or III; the lowest minima on published or unpublished procedures supported by the ILS.

Farthest point of satisfactory Category III Localizer performance for Category I, II, or III approaches: A – 4 NM prior to runway threshold, B – 3500 ft prior to runway threshold, C – glide angle dependent but generally 750–1000 ft prior to threshold, T – runway threshold, D – 3000 ft after runway threshold, and E – 2000 ft prior to stop end of runway.

ILS information is tabulated as indicated in the following sample:

ILS/DME 108.5 I-ORL Chan 22 Rwy 18. Class IIE. LOM HERNY NDB.

ILS Facility Performance
Classification Code

FREQUENCY PAIRING PLAN AND MLS CHANNELING

MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL	MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL	MLS CHANNEL	VHF FREQUENCY	TACAN CHANNEL
500	108.10	18X	568	109.45	31Y	636	114.15	88Y
502	108.30	20X	570	109.55	32Y	638	114.25	89Y
504	108.50	22X	572	109.65	33Y	640	114.35	90Y
506	108.70	24X	574	109.75	34Y	642	114.45	91Y
508	108.90	26X	576	109.85	35Y	644	114.55	92Y
510	109.10	28X	578	109.95	36Y	646	114.65	93Y
512	109.30	30X	580	110.05	37Y	648	114.75	94Y
514	109.50	32X	582	110.15	38Y	650	114.85	95Y
516	109.70	34X	584	110.25	39Y	652	114.95	96Y
518	109.90	36X	586	110.35	40Y	654	115.05	97Y
520	110.10	38X	588	110.45	41Y	656	115.15	98Y
522	110.30	40X	590	110.55	42Y	658	115.25	99Y
524	110.50	42X	592	110.65	43Y	660	115.35	100Y
526	110.70	44X	594	110.75	44Y	662	115.45	101Y
528	110.90	46X	596	110.85	45Y	664	115.55	102Y
530	111.10	48X	598	110.95	46Y	666	115.65	103Y
532	111.30	50X	600	111.05	47Y	668	115.75	104Y
534	111.50	52X	602	111.15	48Y	670	115.85	105Y
536	111.70	54X	604	111.25	49Y	672	115.95	106Y
538	111.90	56X	606	111.35	50Y	674	116.05	107Y
540	108.05	17Y	608	111.45	51Y	676	116.15	108Y
542	108.15	18Y	610	111.55	52Y	678	116.25	109Y
544	108.25	19Y	612	111.65	53Y	680	116.35	110Y
546	108.35	20Y	614	111.75	54Y	682	116.45	111Y
548	108.45	21Y	616	111.85	55Y	684	116.55	112Y
550	108.55	22Y	618	111.95	56Y	686	116.65	113Y
552	108.65	23Y	620	113.35	80Y	688	116.75	114Y
554	108.75	24Y	622	113.45	81Y	690	116.85	115Y
556	108.85	25Y	624	113.55	82Y	692	116.95	116Y
558	108.95	26Y	626	113.65	83Y	694	117.05	117Y
560	109.05	27Y	628	113.75	84Y	696	117.15	118Y
562	109.15	28Y	630	113.85	85Y	698	117.25	119Y
564	109.25	29Y	632	113.95	86Y			
566	109.35	30Y	634	114.05	87Y			

FREQUENCY PAIRING PLAN AND MLS CHANNELING

The following is a list of paired VOR/ILS VHF frequencies with TACAN channels and MLS channels.

TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL
2X	134.5	-	19Y	108.25	544	25X	108.80	-
2Y	134.55	-	20X	108.30	502	25Y	108.85	556
11X	135.4	-	20Y	108.35	546	26X	108.90	508
11Y	135.45	-	21X	108.40	-	26Y	108.95	558
12X	135.5	-	21Y	108.45	548	27X	109.00	-
12Y	135.55	-	22X	108.50	504	27Y	109.05	560
17X	108.00	-	22Y	108.55	550	28X	109.10	510
17Y	108.05	540	23X	108.60	-	28Y	109.15	562
18X	108.10	500	23Y	108.65	552	29X	109.20	-
18Y	108.15	542	24X	108.70	506	29Y	109.25	564
19X	108.20	-	24Y	108.75	554	30X	109.30	512

TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL	TACAN CHANNEL	VHF FREQUENCY	MLS CHANNEL
30Y	109.35	566	63X	133.60	-	95Y	114.85	650
31X	109.40	-	63Y	133.65	-	96X	114.90	-
31Y	109.45	568	64X	133.70	-	96Y	114.95	652
32X	109.50	514	64Y	133.75	-	97X	115.00	-
32Y	109.55	570	65X	133.80	-	97Y	115.05	654
33X	109.60	-	65Y	133.85	-	98X	115.10	-
33Y	109.65	572	66X	133.90	-	98Y	115.15	656
34X	109.70	516	66Y	133.95	-	99X	115.20	-
34Y	109.75	574	67X	134.00	-	99Y	115.25	658
35X	109.80	-	67Y	134.05	-	100X	115.30	-
35Y	109.85	576	68X	134.10	-	100Y	115.35	660
36X	109.90	518	68Y	134.15	-	101X	115.40	-
36Y	109.95	578	69X	134.20	-	101Y	115.45	662
37X	110.00	-	69Y	134.25	-	102X	115.50	-
37Y	110.05	580	70X	112.30	-	102Y	115.55	664
38X	110.10	520	70Y	112.35	-	103X	115.60	-
38Y	110.15	582	71X	112.40	-	103Y	115.65	666
39X	110.20	-	71Y	112.45	-	104X	115.70	-
39Y	110.25	584	72X	112.50	-	104Y	115.75	668
40X	110.30	522	72Y	112.55	-	105X	115.80	-
40Y	110.35	586	73X	112.60	-	105Y	115.85	670
41X	110.40	-	73Y	112.65	-	106X	115.90	-
41Y	110.45	588	74X	112.70	-	106Y	115.95	672
42X	110.50	524	74Y	112.75	-	107X	116.00	-
42Y	110.55	590	75X	112.80	-	107Y	116.05	674
43X	110.60	-	75Y	112.85	-	108X	116.10	-
43Y	110.65	592	76X	112.90	-	108Y	116.15	676
44X	110.70	526	76Y	112.95	-	109X	116.20	-
44Y	110.75	594	77X	113.00	-	109Y	116.25	678
45X	110.80	-	77Y	113.05	-	110X	116.30	-
45Y	110.85	596	78X	113.10	-	110Y	116.35	680
46X	110.90	528	78Y	113.15	-	111X	116.40	-
46Y	110.95	598	79X	113.20	-	111Y	116.45	682
47X	111.00	-	79Y	113.25	-	112X	116.50	-
47Y	111.05	600	80X	113.30	-	112Y	116.55	684
48X	111.10	530	80Y	113.35	620	113X	116.60	-
48Y	111.15	602	81X	113.40	-	113Y	116.65	686
49X	111.20	-	81Y	113.45	622	114X	116.70	-
49Y	111.25	604	82X	113.50	-	114Y	116.75	688
50X	111.30	532	82Y	113.55	624	115X	116.80	-
50Y	111.35	606	83X	113.60	-	115Y	116.85	690
51X	111.40	-	83Y	113.65	626	116X	116.90	-
51Y	111.45	608	84X	113.70	-	116Y	116.95	692
52X	111.50	534	84Y	113.75	628	117X	117.00	-
52Y	111.55	610	85X	113.80	-	117Y	117.05	694
53X	111.60	-	85Y	113.85	630	118X	117.10	-
53Y	111.65	612	86X	113.90	-	118Y	117.15	696
54X	111.70	536	86Y	113.95	632	119X	117.20	-
54Y	111.75	614	87X	114.00	-	119Y	117.25	698
55X	111.80	-	87Y	114.05	634	120X	117.30	-
55Y	111.85	616	88X	114.10	-	120Y	117.35	-
56X	111.90	538	88Y	114.15	636	121X	117.40	-
56Y	111.95	618	89X	114.20	-	121Y	117.45	-
57X	112.00	-	89Y	114.25	638	122X	117.50	-
57Y	112.05	-	90X	114.30	-	122Y	117.55	-
58X	112.10	-	90Y	114.35	640	123X	117.60	-
58Y	112.15	-	91X	114.40	-	123Y	117.65	-
59X	112.20	-	91Y	114.45	642	124X	117.70	-
59Y	112.25	-	92X	114.50	-	124Y	117.75	-
60X	133.30	-	92Y	114.55	644	125X	117.80	-
60Y	133.35	-	93X	114.60	-	125Y	117.85	-
61X	133.40	-	93Y	114.65	646	126X	117.90	-
61Y	133.45	-	94X	114.70	-	126Y	117.95	-
62X	133.50	-	94Y	114.75	648			
62Y	133.55	-	95X	114.80	-			

(35) COMM/NAV/WEATHER REMARKS:

These remarks consist of pertinent information affecting the current status of communications, NAVAIDs and weather.

ADA-TWIN VALLEY**NORMAN CO ADA-TWIN VALLEY**

(D00) 5 SE UTC-6(-5DT)

N47°15.63' W96°24.02'

TWIN CITIES

954 B FUEL 100LL TPA-1754(800) NOTAM FILE PNM

L-14H

RWY 15-33: H3103X60 (ASPH) LIRL 0.5% up SE

IAP

RWY 15: Tree. RWY 33: Tree.

AIRPORT REMARKS: Unattended. For fuel call 218-784-4381/2962.

Ultralights on and invof arpt. Rwy 15-33 cracking and surface erosion. Rwy 15-33 several lights out others leaning.


COMMUNICATIONS: CTAF 122.9

FARGO APP/DEP CON 120.4 (1200-0500Z‡)

® MINNEAPOLIS CENTER APP/DEP CON 127.35 (0500-1200Z‡)

RADIO AIDS TO NAVIGATION: NOTAM FILE FAR.

FARGO (H) VORTACW 116.2 FAR Chan 109 N46°45.20' W96°51.08' 022° 35.6 NM to fld. 910/9E. HIWAS.

**AIRLAKE** (See MINNEAPOLIS)**AITKIN MUNI-STEVE KURTZ FLD**

(AIT) 2 NE UTC-6(-5DT)

N46°32.91' W93°40.61'

TWIN CITIES

1205 B S2 FUEL 100LL, JET A TPA-2005(800) NOTAM FILE AIT

L-14H

RWY 16-34: H4018X75 (ASPH) S-12.5 MIRL

IAP

RWY 16: REIL. VASI(V2L)-GA 3.0° TCH 26'.

RWY 34: REIL. VASI(V2L)-GA 3.0° TCH 39'.

RWY 08-26: 3335X150 (TURF)

RWY 08: Trees. RWY 26: Trees.

AIRPORT REMARKS: Attended Nov-Apr 1500-2200Z‡, May-Oct

1500-2300Z‡. For svc after hrs call 218-845-2808,

218-821-1622, 218-820-5114. Rwy 08-26 CLOSED Nov-Apr.

Rwy 08-26 marked with yellow cones. Rwy 08-26 ski equipped acft only Nov-Apr, call 218-927-4104 for rwy conditions.

ACTIVATE MIRL Rwy 16-34, VASI Rwy 16 and Rwy 34 and REIL Rwy 16 and Rwy 34-CTAF.

WEATHER DATA SOURCES: AWOS-3 118.675 (218) 927-2101.**COMMUNICATIONS:** CTAF/UNICOM 123.05

MINNEAPOLIS CENTER APP/DEP CON 118.05

GCO 121.725 (MINNEAPOLIS CENTER and PRINCETON RADIO)


RADIO AIDS TO NAVIGATION: NOTAM FILE BRD.

BRainerd (H) VORTACW 116.9 BRD Chan 116 N46°20.89'

W94°01.55' 047° 18.8 NM to fld. 1260/3E.

NDB (MHW) 397 AIT N46°32.85' W93°40.52' at fld.

(Unmonitored). NOTAM FILE AIT.

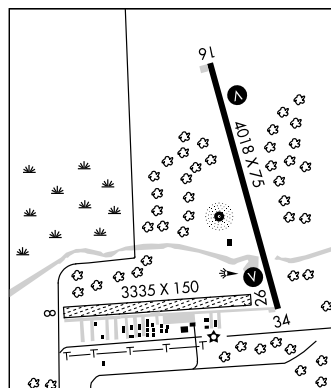

ALBERT LEA MUNI (AEL) 3 N UTC-6(-5DT) N43°40.89' W93°22.04'
 1260 B **FUEL** 100LL, JET A, MOGAS TPA-2000(740) NOTAM FILE AEL
RWY 16-34: H4501X100 (ASPH) S-19, D-29 MIRL
RWY 16: REIL. VASI(V2L).
RWY 34: REIL. VASI(V2L). Tree.
RWY 04-22: H2898X75 (ASPH)
Rwy 04: Trees.

AIRPORT REMARKS: Attended Apr-Oct Mon-Fri 1400-0200Z†, Nov-Mar Mon-Fri 1400-2300Z†, Sat-Sun 1400-2300Z†. For svc after hrs call 507-826-3451. MOGAS pump not marked. Ultralights, gliders and helicopters use turf parallel to Rwy 16-34 on E side and approach area to Rwy 22. TV tower 9.5 NM SE. Days: ACTIVATE MIRL Rwy 16-34, VASI and REIL Rws 16 and 34-CTAF. Ngts: VASI continuous, MIRL Rwy 16-34 ints preset to increase ints and ACTIVATE REIL Rws 16 and 34-CTAF.

WEATHER DATA SOURCES: AWOS-3 109.8 AEL (507) 377-1583.
COMMUNICATIONS: CTAF/UNICOM 123.0


RCO 122.05 (PRINCETON RADIO)

Ⓡ **ROCHESTER APP/DEP CON 119.8 (1100-0500Z)†**

Ⓡ **MINNEAPOLIS CENTER APP/DEP CON 135.35 (0500-1100Z)†**

RADIO AIDS TO NAVIGATION: NOTAM FILE AEL.

(T) **VORW/DME 109.8** AEL Chan 35 N43°40.91 W93°22.25' at fld. 1265/6E. **AWOS-3.** Unmonitored.

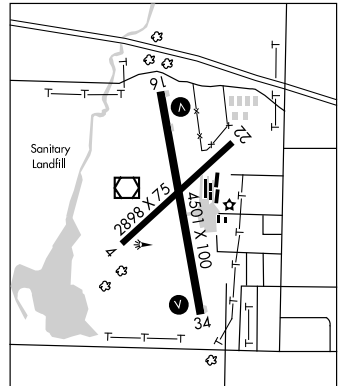

OMAHA
 L-12J
 IAP

ALEXANDRIA N45°57.50' W95°13.96' NOTAM FILE AXN.
 (L) **VORW/DME 112.8** AXN Chan 75 224° 8.8 NM to Chandler Fld. 1367/7E. **HIWAS.**
 VOR/DME unusable byd 30 NM bto 3500'.
RCO 122.6 (PRINCETON RADIO)

TWIN CITIES
 L-14H

ALEXANDRIA

CHANDLER FLD (AXN) 2 SW UTC-6(-5DT) N45°51.98' W95°23.68'

1425 B S4 **FUEL** 100LL, JET A NOTAM FILE AXN

RWY 13-31: H5100X100 (ASPH) S-35, D-60 MIRL

RWY 13: REIL. PAPI(P4L)-GA 3.0° TCH 34'. Trees.

RWY 31: ODALS. PAPI(P4L)-GA 3.0° TCH 50'.

RWY 04-22: H4099X75 (ASPH) S-35, D-60 MIRL

RWY 04: REIL. PAPI(P4L)-GA 3.0° TCH 44'. Tree.

RWY 22: REIL. PAPI(P4L)-GA 3.0° TCH 44'. Tree.

AIRPORT REMARKS: Attended May-Oct, Mon-Fri 1400-0200Z†,

Nov-Apr, Mon-Fri 1400-0000Z†. Sat-Sun, 1500-2300Z†.

Holidays 1500-2300Z†. For attendant after hours call 320-492-6652. CAUTION, occasional parachute jumping over arpt. Check NOTAMS. Ultralight tfo on and invof arpt. Waterfowl and jackrabbits on and invof rws. MIRL Rwy 13-31 preset on low ints, to ACTIVATE higher ints and MIRL Rwy 04-22, PAPI Rwy 04, Rwy 22, Rwy 13 and Rwy 31, REIL Rwy 04, Rwy 22, Rwy 13 and ODALS Rwy 31-CTAF.

WEATHER DATA SOURCES: ASOS 118.375 (320) 763-7174. **HIWAS 112.8** AXN.

COMMUNICATIONS: CTAF/UNICOM 123.0

ALEXANDRIA RCO 122.6 (PRINCETON RADIO)


Ⓡ **MINNEAPOLIS CENTER APP/DEP CON 126.1**

RADIO AIDS TO NAVIGATION: NOTAM FILE AXN.

ALEXANDRIA (L) VORW/DME 112.8 AXN Chan 75 N45°57.50' W95°13.96' 224° 8.8 NM to fld. 1367/7E. **HIWAS.**

TAMIE NDB (MHW/LOM) 374 EE N45°47.50' W95°18.33' 316° 5.8 NM to fld.

ILS 110.5 I-EEZ Rwy 31. LOM TAMIE NDB.

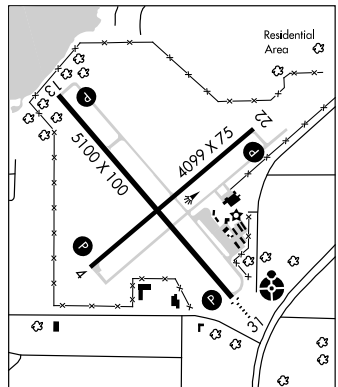

TWIN CITIES
 H-21, L-14H
 IAP

ANOKA CO-BLAINE ARPT (JANES FLD) (See MINNEAPOLIS)

APPLETON MUNI (AQP) 2 NE UTC-6(-5DT) N45°13.65' W96°00.26'

TWIN CITIES

1020 B TPA-1820(800) NOTAM FILE AQP

L-121, 14H

RWY 13-31: H3500X75 (ASPH) MIRL

IAP

RWY 31: Trees.

RWY 04-22: 2725X157 (TURF)

RWY 04: Road.

RWY 22: Road.

AIRPORT REMARKS: Unattended. Rwy 04-22 CLOSED winter months.

Ultralights on and in/ovf arpt. Rwy 13 visual lighting on instrument rwy. Rwy 04-22 marked with yellow cones. ACTIVATE MIRL Rwy 13-31-CTAF.

WEATHER DATA SOURCES: AWOS-3 356 AQP (320) 289-1265.

COMMUNICATIONS: CTAF 122.9


RADIO AIDS TO NAVIGATION: NOTAM FILE MVE.

MONTEVIDEO (T) VORW/DME 111.6 MVE Chan 53 N44°58.36'

W95°42.72' 316° 19.7 NM to fld. 1034/5E. Unmonitored.

NDB (MHW) 356 AQP N45°13.71' W96°00.57' at fld. AWOS-3.

NOTAM FILE AQP.



A.R.S. SPORT STRIP (See BELLE PLAINE)

AUSTIN MUNI (AUM) 2 E UTC-6(-5DT) N43°39.76' W92°55.98'

CHICAGO

1234 B S4 FUEL 100LL JET A NOTAM FILE AUM

H-5D, L-12J

RWY 17-35: H5800X100 (CONC) S-14, D-19 HIRL

IAP

RWY 17: REIL. PAPI(P4L)-GA 3.0° TCH 41'. Trees.

RWY 35: MALSR. PAPI(P4L)-GA 3.0° TCH 42'. P-line.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z, Sat 1400-2200Z, Sun 1500-2100Z. Migratory waterfowl and deer in vicinity of arpt. HIRL Rwy 17-35 preset low ints, to increase ints and ACTIVATE REIL Rwy 17, MALSR Rwy 35 and PAPI Rwy 17 and Rwy 35-CTAF.

WEATHER DATA SOURCES: AWOS-3 119.025 (507) 433-6667

COMMUNICATIONS: CTAF/UNICOM 122.7

RCO 122.5 (PRINCETON RADIO)

Ⓡ **ROCHESTER APP/DEP CON** 119.8 (1100-0400Z)

Ⓡ **MINNEAPOLIS CENTER APP/DEP CON** 132.35 (0400-1100Z)

RADIO AIDS TO NAVIGATION: NOTAM FILE RST.


ROCHESTER (L) VORW/DME 112.0 RST Chan 57 N43°46.97'

W92°35.82' 239° 16.3 NM to fld. 1389/5E. HIWAS.

(T) **VORW/DME** 108.2 JAY Chan 19 N43°34.58' W92°55.18'

351° 5.2 NM to fld. 1232/3E. NOTAM FILE AUM.

ILS 110.55 I-AUM Rwy 35. LOC only.



BABCO N44°51.40' W92°59.07' NOTAM FILE STP.

TWIN CITIES

NDB (LOM) 385 BA 322° 5.7 NM to St Paul Downtown Holman Fld.

BACKUS MUNI (7Y3) 1 NE UTC-6(-5DT) N46°49.61' W94°30.43'

TWIN CITIES

1355 B FUEL 100LL NOTAM FILE PNM

RWY 15-33: 3588X145 (TURF) LIRL (NSTD)

RWY 15: Trees.

AIRPORT REMARKS: Attended 1400-2300Z. For fuel call 218-947-3211/3100. Ultralight activity on and in/ovf arpt.

Rwy 15 and Rwy 33 sand showing through turf. Rwy 15-33 marked with yellow plastic cones. Rwy 15-33 NSTD LIRL due to spacing.

COMMUNICATIONS: CTAF 122.9

BAGLEY MUNI (7Y4) 1 E UTC-6(-5DT) N47°31.50' W95°21.65'

TWIN CITIES

1500 B NOTAM FILE PNM

L-14H

RWY 14-32: H3800X75 (ASPH) MIRL

RWY 14: REIL. PAPI(P4L). Trees.

RWY 32: REIL. PAPI(P4L). Trees.

AIRPORT REMARKS: Unattended. Rwy 14-32 1-2' dropoff at edge of pavement. Rwy 14-32 bare spots and plow damage on rwy. Rwy 14-32 preset low ints, chg ints and ACTIVATE REIL Rwy 14 and 32 and PAPI Rwy 14 and Rwy 32—CTAF.

COMMUNICATIONS: CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE BJI.

BEMIDJI (L) VORTACW 108.6 BJI Chan 23 N47°34.55' W95°01.49' 254° 14 NM to fld. 1410/4E.
HIWAS.

BAUDETTE INTL (BDE) 1 N UTC-6(-5DT) N48°43.71' W94°36.73'

TWIN CITIES

1086 B S4 FUEL 100LL, JET A AOE NOTAM FILE BDE

H-2I, L-14H

RWY 12-30: H5499X100 (ASPH) S-30 MIRL

IAP

RWY 12: REIL. PAPI(P4L)—GA 3.0° TCH 47'. Tree.

RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 47'. Trees.

AIRPORT REMARKS: Attended Apr-Oct 1400-2300Z†, Nov-Mar Mon-Fri 1400-2300Z†. For arpt attendant other times call 707-317-0232. Ultralights on and invof arpt. CAUTION: Gulls and other birds on and invof arpt. Twy parallel to Rwy 12-30 is clsd winter months. ACTIVATE MIRL Rwy 12-30, REIL Rwy 12 and Rwy 30 and PAPI Rwy 12 and Rwy 30—CTAF. Flight Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS 126.775 (218) 634-3080.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.1 (PRINCETON RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE BDE.

(L) VORW/DME 111.6 BDE Chan 53 N48°43.37'

W94°36.44' at fld. 1081/4E.

VOR unusable: 100°-265° byd 35 NM blo 3500'.


DME unusable: 295°-310° byd 35 NM blo 3500'.

ILS 108.3 I-BDE Rwy 30.

• • • • •

1062

WATERWAY 13-31: 6000X1200 (WATER)

**BELLE PLAINE****A.R.S. SPORT STRIP** (7Y7) 3 N UTC-6(-5DT) N44°40.00' W93°47.01'

TWIN CITIES

955 S4 NOTAM FILE PNM

RWY 18-36: 2505X110 (TURF)

RWY 36: Thld dsplcd 210'.

AIRPORT REMARKS: Unattended. For svcs call 952-873-6659. Ultralight activity on and invof arpt. Rwy 18 and Rwy 36 thlds and edges marked with yellow cones.

COMMUNICATIONS: CTAF 122.9

BEMIDJI**BEMIDJI RGNL** (BJI) 3 NW UTC-6(-5DT) N47°30.64' W94°56.08'

TWIN CITIES

1391 B S4 FUEL 100LL JET A OX 3,4 Class I, ARFF Index A NOTAM FILE BJI

H-21, L-14H

RWY 13-31: H7002X150 (ASPH-GRVD) S-75, D-200 HIRL

IAP

RWY 13: MALSR. PAPI(P4L)—GA 3.0° TCH 45'.

RWY 31: REIL. MALSR. PAPI(P4L)—GA 3.0° TCH 45'.

RWY 07-25: H5700X150 (ASPH-GRVD) S-75, D-200 MIRL

RWY 07: REIL. PAPI(P4L)—GA 3.0° TCH 43'. Trees.

RWY 25: REIL. PAPI(P4L)—GA 3.0° TCH 47'.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 07: TORA-5700 TODA-5700 ASDA-5700 LDA-5700

RWY 13: TORA-7002 TODA-7002 ASDA-7002 LDA-7002

RWY 25: TORA-5700 TODA-5700 ASDA-5700 LDA-5700

RWY 31: TORA-7002 TODA-7002 ASDA-7002 LDA-7002

AIRPORT REMARKS: Attended Mon-Fri 1200-0300Z, Sat-Sun

1400-0200Z in summer and Sat-Sun 1400-0000Z in winter.

Deer and birds on and in/ovf arpt. Snow removal crews will be monitoring CTAF during all air carrier operations for airfield condition information. ARFF crews will be monitoring CTAF during all air carrier operations. 48 hr PPR for unscheduled air carrier ops with more than 30 passenger seats, call arpt manager 218-444-2438. Air carrier ops involving acft with more than 30 passengers are not authorized in excess of 15 minutes before or after scheduled arrival/departure times without prior coordination with arpt manager and confirmation that ARFF is avbl prior to landing or takeoff. HIRL Rwy 13-31 preset on low ints, to increase ints and ACTIVATE MIRL Rwy 07-25; REIL Rwy 07, Rwy 31 and Rwy 25 and PAPI Rwy 07, Rwy 25, Rwy 13 and Rwy 31, MALSR Rwy 13 and Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.275 (218) 759-2501. HIWAS 108.6 BJI.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 123.6 (PRINCETON RADIO)

MINNEAPOLIS CENTER APP/DEP CON 134.75

AIRSPACE: CLASS E svc Mon-Sat 1045-0545Z, Sun 1400-0545Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE BJI.

(L) VORTACW 108.6 BJI Chan 23 N47°34.55' W95°01.49' 133° 5.4 NM to fld. 1410/4E. HIWAS.


VOR portion OTS indef. VOR portion unusable 011°-050° blo 6000'. DME unusable byd 30 NM blo 3500'.

LAKE BEMIDJI (T) VOR/DME 110.0 IDJ Chan 37 N47°30.47' W94°55.40' at fld. 1384/4E. Associated with AWOS-3 (BJI).

BUNAN NDB (LOM) 371 MD N47°26.70' W94°50.10' 310° 5.7 NM to fld. Unmonitored.

ILS 111.9 I-MDI Rwy 31 LOM BUNAN NDB. LOM unmonitored.

ILS/DME 109.35 I-BJI Chan 030(Y) Rwy 25. Class IA.

**BENSON MUNI** (BBB) 2 W UTC-6(-5DT) N45°19.92' W95°39.04'

TWIN CITIES

1039 B S2 FUEL 100LL NOTAM FILE BBB

L-14H

RWY 14-32: H4000X75 (ASPH) S-40, D-50 MIRL

IAP

RWY 14: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees. Rgt t/c.

RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 41'. Trees.

AIRPORT REMARKS: Unattended. Self svc fuel avbl 24 hrs with credit card. Ultralight acft on and in/ovf the arpt. Category C and D acft ops prohibited. Rwy 14 PAPI unusable byd 2 NM. ACTIVATE MIRL Rwy 14-32, PAPI Rwy 14 and Rwy 32, and REIL Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 239 BBB (320) 843-3242.**COMMUNICATIONS:** CTAF/UNICOM 122.8

MINNEAPOLIS CENTER APP/DEP CON 125.5


RADIO AIDS TO NAVIGATION: NOTAM FILE MOX.**MORRIS (T) VORW/DME** 109.6 MOX Chan 33 N45°33.95'

W95°58.15' 131° 19.4 NM to fld. 1132/5E.

Unmonitored.

NDB (MHW) 239 BBB N45°19.63' W95°39.06' at fld.

AWOS-3. NOTAM FILE BBB. Unmonitored.



BIG FALLS MUNI (7Y9) 3 NE UTC-6(-5DT) N48°12.03' W93°45.74'

TWIN CITIES

1232 NOTAM FILE PNM

RWY 03-21: 2850X100 (TURF)

RWY 21: Thld dsplcd 785'.

RWY 11-29: 2602X200 (TURF) LIRL (NSTD)

RWY 11: Trees.

RWY 29: Trees.

AIRPORT REMARKS: Unattended. Arpt surfaces not plowed in winter, call arpt manager 218-556-4827, or check NOTAMS. Ultralight t/c on and invof arpt. Rwy 11-29 marked with yellow cones. Rwy 11-29 NSTD LIRL due to spacing.

COMMUNICATIONS: CTAF 122.9

BIGFORK MUNI (FOZ) 2 N UTC-6(-5DT) N47°46.97' W93°39.01'

TWIN CITIES

1348 B NOTAM FILE FOZ

L-14H

RWY 15-33: H3100X75 (ASPH) MIRL

IAP

AIRPORT REMARKS: Unattended. 350' microwave twr 2 miles South Rwy 15. Deer and waterfowl on and invof arpt. Rwy 15-33 cracks. ACTIVATE MIRL Rwy 15-33-CTAF.

WEATHER DATA SOURCES: AWOS-3 345 FOZ (218) 743-3289.

COMMUNICATIONS: CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 127.9

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE GPZ.

GRAND RAPIDS (L) VOR/DME 111.4 GPZ Chan 51 N47°09.82' W93°29.31' 344° 37.8 NM to fld. 1400/6E.

NDB (MHW) 345 FOZ N47°47.01' W93°39.24' at fld. AWOS-3. NOTAM FILE FOZ.

BLUE EARTH MUNI (SBU) 3 S UTC-6(-5DT) N43°35.72' W94°05.57'

OMAHA

1107 B S2 FUEL 100LL, JET A TPA-2107(1000) NOTAM FILE PNM

L-121

RWY 16-34: H3399X75 (ASPH) MIRL 0.4% up SE

IAP

RWY 16: Silo.

RWY 34: Road.

RWY 03-21: 2280X200 (TURF)

RWY 03: Trees.

RWY 21: Road.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z+. For svc after hrs call 507-525-3068 or 507-525-3064 or 507-526-2056. Rwy 03-21 CLOSED winter months. Deer and waterfowl on and invof arpt. Rwy 03-21 marked with yellow cones. ACTIVATE MIRL Rwy 16-34-CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

① MINNEAPOLIS CENTER APP/DEP CON 127.75


RADIO AIDS TO NAVIGATION: NOTAM FILE FRM.

FAIRMONT (L) VOR/DME 110.2 FRM Chan 39 N43°38.76'

W94°25.35' 095° 14.7 NM to fld. 1164/7E.

NDB (MHW) 332 SBU N43°35.82' W94°05.81' at fld.

NOTAM FILE PNM.

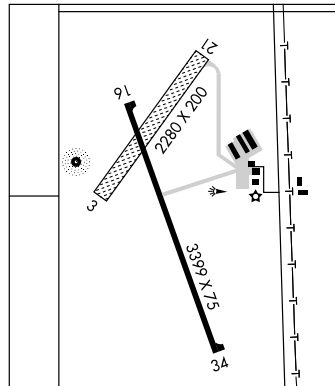**BOWSTRING** (9YØ) 2 NW UTC-6(-5DT) N47°33.49' W93°52.20'

TWIN CITIES

1372 NOTAM FILE PNM

RWY 07-25: 2531X150 (TURF) LIRL

RWY 25: Trees

AIRPORT REMARKS: Unattended. Arpt plowed winter months. Deer on and invof arpt. Rwy 07-25 marked with yellow cones.

COMMUNICATIONS: CTAF 122.9

BROOTEN MUNI (6D1) 1 SE UTC-6(-5DT) N45°30.00' W95°06.77'

TWIN CITIES

1305 B NOTAM FILE PNM

L-14H

RWY 15-33: H3500X60 (ASPH) LIRL

RWY 15: Trees. RWY 33: Tree.


AIRPORT REMARKS: Unattended. Ultralights on and invof arpt.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE AXN.

ALEXANDRIA (L) VORW/DME 112.8 AXN Chan 75 N45°57.50'

W95°13.96' 163° 28.0 NM to fld. 1367/7E. HIWAS.

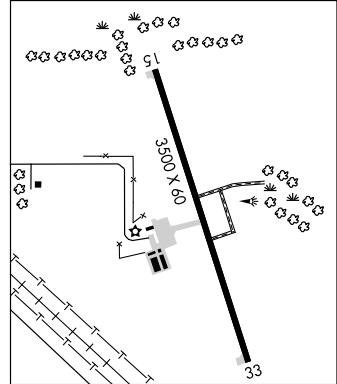**BUFFALO MUNI** (CFE) 2 SE UTC-6(-5DT) N45°09.54' W93°50.60'

TWIN CITIES

967 B S4 FUEL 100LL TPA-1797(830) NOTAM FILE CFE

L-12I, 14H, A

RWY 17-35: H2600X60 (ASPH) LIRL (NSTD) 0.5% up N

IAP

RWY 17: Pole. RWY 35: Trees.

AIRPORT REMARKS: Attended dailgt hrs. Fuel avbl 24 hrs with credit card.

Ultralight tfc on and invof arpt. Rwy 17 and Rwy 35 NSTD LIRL.

WEATHER DATA SOURCES: AWOS-3 120.45 (763) 684-0762.

COMMUNICATIONS: CTAF/UNICOM 122.8


® MINNEAPOLIS APP/DEP CON 126.5

GCO 121.725 (MINNEAPOLIS CLNC and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

GOPHER (H) VORTACW 117.3 GEP Chan 120 N45°08.74'

W93°22.39' 266° 20.0 NM to fld. 877/6E. HIWAS.

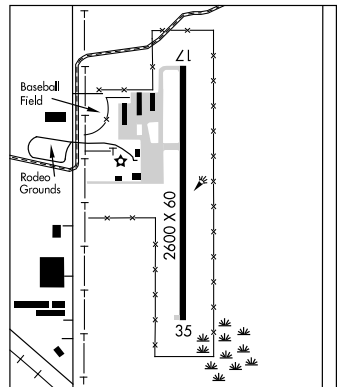**BUNAN** N47°26.70' W94°50.10' NOTAM FILE BJI.

TWIN CITIES

NDB (LOM) 371 MD 310° 5.6 NM to Bemidji Rgnl. Unmonitored.

CALEDONIA**HOUSTON CO** (CHU) 3 S UTC-6(-5DT) N43°35.78' W91°30.24'

1179 B FUEL 100LL NOTAM FILE PNM

RWY 13-31: H3499X77 (ASPH) S-10 MIRL

AIRPORT REMARKS: Unattended. Fuel 24hr credit card svc avbl. Rwy 13-31 alligator cracking, loose aggregate. No hold line at Rwy 31. Turf twy rutted. ACTIVATE MIRL Rwy 13-31—CTAF.

COMMUNICATIONS: CTAF 122.9

NODINE RCO 122.1R 117.9T (PRINCETON RADIO)

⑧ MINNEAPOLIS CENTER APP/DEP CON 128.6


RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

NODINE (H) VORTAC 117.9 ODI Chan 126 N43°54.74'
W91°28.05' 184° 19 NM to fld. 1282/1E.

CHICAGO

L-286

IAP

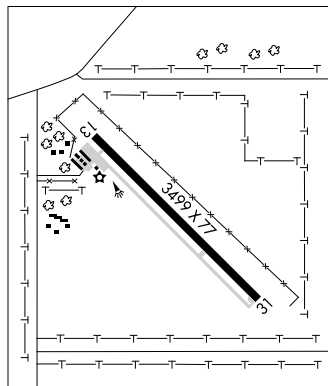**CAMBRIDGE MUNI** (CBG) 2 SW UTC-6(-5DT) N45°33.45' W93°15.85'

945 B S4 FUEL 100LL NOTAM FILE CBG

RWY 16-34: H4000X75 (ASPH) S-19 MIRL

RWY 16: PAPI(P4R)—GA 3.0° TCH 40'.

RWY 34: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Unattended. Self service fuel avbl with credit card. Migratory waterfowl and deer on and in/ovf arpt. For Noise Abatement, acft departing Rwy 16 fly rwy heading to 1945' MSL (1000' AGL) and 2 NM before left turn. ACTIVATE MIRL Rwy 16-34, PAPI Rwy 16 and Rwy 34 and REIL Rwy 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 121.125 (763) 689-9562.**COMMUNICATIONS:** CTAF/UNICOM 122.8

⑧ MINNEAPOLIS CENTER APP/DEP CON 121.05

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.


GOPHER (H) VORTACW 117.3 GEP Chan 120 N45°08.74'
W93°22.39' 005° 25.1 NM to fld. 877/6E. HIWAS.

NDB (MHW) 350 CBG N45°33.45' W93°15.73' at fld.
NOTAM FILE CBG.

TWIN CITIES

L-141

IAP

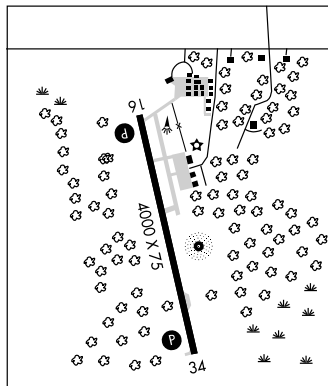**CAMP RIPLEY** (See RAY S MILLER AAF)

CANBY**MYERS FLD** (CNB) 1 N UTC-6(-5DT) N44°43.77' W96°15.96'**TWIN CITIES**

1194 B FUEL 100LL, JET A NOTAM FILE CNB

L-121, 14H

RWY 12-30: H4648X75 (ASPH) MIRL

IAP

RWY 12: REIL. PAPI(P4L)—GA 3.0° TCH 25'. RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 29'. Thld dsplcd 239'. Road.

AIRPORT REMARKS: Unattended. Self service fuel avbl 24 hrs with credit card. MIRL Rwy 12-30 preset on low ints. To increase ints and ACTIVATE REIL Rwy 12 and Rwy 30 and PAPI Rwy 12 and Rwy 30—CTAF.**WEATHER DATA SOURCES:** AWOS-3 118.575 (507) 223-5293**COMMUNICATIONS:** CTAF 122.9

MADISON RCO 122.3 (PRINCETON RADIO)

® MINNEAPOLIS CENTER APP/CON 128.5

GCO 121.725 (FLIGHT SERVICES).

RADIO AIDS TO NAVIGATION: NOTAM FILE MML.

MARSHALL (T) VOR/DME 111.0 MML Chan 47 N44°26.90' W95°49.49' 307° 25.3 NM to fld. 1180/5E. AWOS-3 unmonitored.

CHANDLER FLD (See ALEXANDRIA)**CHATFIELD****FLYING A** (2C4) 8 W UTC-6(-5DT) N43°49.00' W92°20.21'**CHICAGO**

1300 NOTAM FILE PNM

RWY 09-27: 3000X150 (TURF)

AIRPORT REMARKS: Attended 1400-0000Z+. Ultralight tfc on and invof arpt. Major powerplant repairs avbl. Rwy 09-27 marked with yellow cones.**COMMUNICATIONS:** CTAF 122.9**CHISHOLM-HIBBING** (See HIBBING)**CLARISSA MUNI** (8Y5) 2 SE UTC-6(-5DT) N46°06.78' W94°54.40'**TWIN CITIES**

1308 NOTAM FILE PNM

RWY 10-28: 2600X200 (TURF)

RWY 10: Trees. RWY 28: Trees.

AIRPORT REMARKS: Unattended. Confirm winter conditions with arpt manager prior to use due to irregular snow removal call 218-756-3592/218-756-2125/218-756-2335. Rwy 10-28 edges marked with yellow cones.**COMMUNICATIONS:** CTAF 122.9**CLEAR LAKE****LEADERS CLEAR LAKE** (8Y6) 2 E UTC-6(-5DT) N45°26.66' W93°58.27'**TWIN CITIES**

990 S4 FUEL 100LL NOTAM FILE PNM

RWY 18-36: 3000X150 (ASPH-TURF)

RWY 18: Trees. RWY 36: Road.

AIRPORT REMARKS: Attended 1400Z+-dusk. There are several bare spots along the center of the rwy. Rwy 18-36 and dsplcd thresholds marked with yellow cones. Old A frame markers on north end do not coincide with rwy markings. Ultralight tfc on and invof arpt.**COMMUNICATIONS:** CTAF 122.9

CLOQUET CARLTON CO (COQ) 3 SW UTC-6(-5DT) N46°42.07' W92°30.22'

GREEN BAY

1279 B S4 FUEL 100LL, JET A NOTAM FILE COQ

L-141

RWY 17-35: H4003X75 (ASPH) S-8, D-12 MIRL

IAP

RWY 17: REIL. VASI(V4L)—GA 3.0° TCH 29'.

RWY 35: ODALS. VASI(V4L).

RWY 07-25: H3100X75 (ASPH). MIRL. 0.3% up SW

RWY 07: Trees.

AIRPORT REMARKS: Attended Mon-Sat 1400-2300Z†. Fuel avbl 24 hrs credit card svc. For svc after hrs 218-591-6157. ACTIVATE MIRL Rwy 17-35 and Rwy 07-25, VASI Rwy 17 and Rwy 35, ODALS Rwy 35 and REIL Rwy 17—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.525 (218) 879-0783.**COMMUNICATIONS:** CTAF/UNICOM 122.8

Ⓡ DULUTH APP/DEP CON 125.45 (1200-0500Z†) CLNC DEL 122.15

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 127.9 (0500-1200Z†)


RADIO AIDS TO NAVIGATION: NOTAM FILE DLH.

DULUTH (H) VORTACW 112.6 DLH Chan 73 N46°48.13'

W92°12.17' 239° 13.8 NM to fld. 1428/5E.

NDB (MHW) 335 COQ N46°41.83' W92°30.20' at fld.

NOTAM FILE COQ.

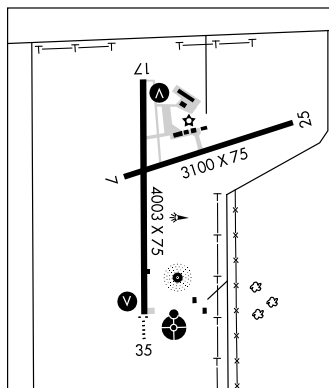**COOK COUNTY** N47°50.40' W90°23.14' NOTAM FILE CKC.

GREEN BAY

NDB (MHW) 358 CKC at Grand Marais/Cook County.

L-141

COOK MUNI (CQM) 2 S UTC-6(-5DT) N47°49.31' W92°41.44'

GREEN BAY

1327 B FUEL 100LL, JET A NOTAM FILE CQM

L-141

RWY 13-31: H3200X75 (ASPH) MIRL 0.3% up NW

IAP

RWY 13: Trees. RWY 31: Trees.

RWY 07-25: 1570X120 (TURF)

RWY 07: Thld displcd 585'. Trees.

RWY 25: Thld displcd 625'.

AIRPORT REMARKS: Attended 1500-1900Z†. Self svc fuel avbl 24 hrs. Rwy 07-25 CLOSED winter months. Rwy 13-31 rough ride, secondary cracking, alligator cracking. Rwy 07-25 and displcd thlds marked with yellow cones. MIRL Rwy 13-31 preset low ints, to increase ints ACTIVATE—CTAF


WEATHER DATA SOURCES: AWOS-3 118.175 (218) 666-2539.**COMMUNICATIONS:** CTAF 122.9

EVELETH RCO 122.45 (PRINCETON RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE HIB.

HIBBING (L) VORW/DME 110.8 HIB Chan 45 N47°18.09'

W92°42.24' 359° 31.2 NM to fld. 1312/2E.

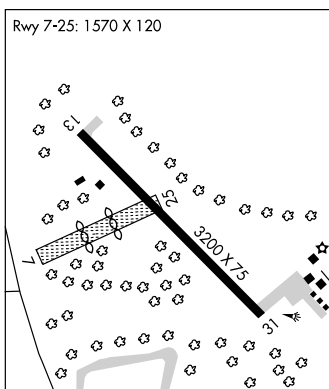**CRANE LAKE** N48°15.60' W92°28.48'

GREEN BAY

RCO 122.2 (PRINCETON RADIO)

L-141

CRANE LAKE**SCOTTS SPB** (CDD) 0 NE UTC-6(-5DT) N48°16.00' W92°29.01'

GREEN BAY

1119 FUEL 100LL, MOGAS LRA NOTAM FILE CDD

WATERWAY 07-25: 8000X1000 (WATER)

WATERWAY 16-34: 7000X1000 (WATER)

SEAPLANE REMARKS: Attended May-Sep 1300Z†—dark. Inlet southwest of dock is a congested area, avoid as approach/departure area.

WEATHER DATA SOURCES: AWOS-3 385 SCG (218) 993-2467.**COMMUNICATIONS:** CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE CDD.

SCOTT NDB (MHW) 385 SCG N48°15.60' W92°28.48' at fld. AWOS-3. VFR only.

CROOKSTON MUNI KIRKWOOD FLD (CKN) 4 N UTC-6(-5DT) N47°50.50' W96°37.29'

TWIN CITIES

900 B S4 FUEL 100LL, JET A TPA-1700(800) NOTAM FILE CKN

L-146

RWY 13-31: H4300X75 (ASPH) S-11, D-16 MIRL

IAP

RWY 13: REIL. PAPI(P4L)—GA 3.0° TCH 20'.

RWY 31: REIL. PAPI(P4R)—GA 3.0° TCH 20'.

RWY 17-35: 2977X202 (TURF)

RWY 06-24: 2096X202 (TURF) 0.4% up NE

RWY 24: Trees.

AIRPORT REMARKS: Attended dalgt hrs. Fuel avbl 24 hrs with credit card. Rwy 17-35 and Rwy 06-24 CLOSED winter months. Rwy 13 designated no wind rwy. Rwy 06-24 and Rwy 17-35 marked with yellow cones. ACTIVATE MIRL Rwy 13-31, REIL Rwy 13 and Rwy 31 and PAPI Rwy 13 and Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 400 CKN (218) 281-3018.**COMMUNICATIONS:** CTAF/UNICOM 122.7

Ⓡ GRAND FORKS APP/DEP CON 118.1 CLNC DEL 118.15


RADIO AIDS TO NAVIGATION: NOTAM FILE GFK.

GRAND FORKS (H) VORW/DME 114.3 GFK Chan 90 N47°57.29'

W97°11.12' 097° 23.8 NM to fld. 841/9E. HIWAS.

NDB (MHW) 400 CKN N47°50.42' W96°36.99' at fld.

AWOS-3. NOTAM FILE CKN.

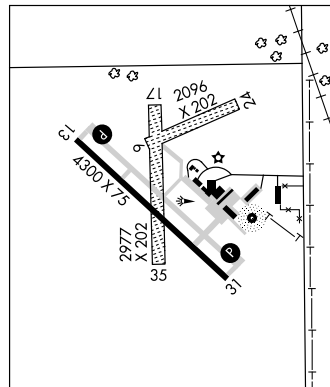**CRYSTAL** (See MINNEAPOLIS)**DARWIN** N45°05.25' W94°27.23' NOTAM FILE PNM.

TWIN CITIES

(L) VORTAC 109.0 DWN Chan 27 277° 2.3 NM to Litchfield Muni. 1130/7E.

L-121, 14H

RCO 122.1R 109.0T (PRINCETON RADIO)

DAWSON-MADISON N44°59.05' W96°10.75' NOTAM FILE DXX.

OMAHA

NDB (MHW) 341 DXX at Lac Qui Parle Co. AWOS-3.

L-121, 14H

DEERWOOD**BIRCH LAKE SPB** (M69) 6 NW UTC-6(-5DT) N46°22.18' W93°48.83'

TWIN CITIES

1278 NOTAM FILE PNM

WATERWAY 13-31: 6000X2000 (WATER)

WATERWAY 07-25: 5000X2000 (WATER)

SEAPLANE REMARKS: Unattended.

COMMUNICATIONS: CTAF 122.9

MAL'S SERPENT LAKE SPB (M14) 1 E UTC-6(-5DT) N46°28.45' W93°55.12'

TWIN CITIES

1246 NOTAM FILE PNM

WATERWAY 06W-24W: 10000X500 (WATER)

WATERWAY 06: Rgt t/c.

WATERWAY 18W-36W: 6000X500 (WATER)

SEAPLANE REMARKS: Unattended. Avoid overflight of Crosby Hospital 1.4 NM NW.

COMMUNICATIONS: CTAF 122.9

DETROIT LAKES—WETHING FLD (DTL) 2 W UTC-6(-5DT) N46°49.51' W95°53.14'

TWIN CITIES

1397 B S4 FUEL 100LL, JET A TPA-2197(800) NOTAM FILE DTL

L-14H

RWY 13-31: H4500X75 (ASPH) S-23, D-42 MIRL 0.8% up NW

IAP

RWY 13: REIL. VASI(V4L)—TCH 45'. Road.

RWY 31: REIL. VASI(V4L)—TCH 35'. Trees.

RWY 17-35: 1880X250 (TURF)

RWY 35: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-0000Z†, Sat 1500-2200Z†.

Self svc avbl 24 hrs. Ultralights on and invof arpt. Rwy 17-35

CLOSED winter months. Rwy 17-35 marked with cones. Rwy 13 and

Rwy 31 omnidirectional REIL. ACTIVATE MIRL Rwy 13-31 and REIL

Rwy 13 and Rwy 31 and VASI Rwy 13 and 31—CTAF.


WEATHER DATA SOURCES: AWOS-3 111.2 DTL (218) 847-8626.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.5 (PRINCETON RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE DTL.

(T) VORW/DME 111.2 DTL Chan 49 N46°49.54'

W95°53.23' at fld. 1387/5E. AWOS-3. Unmonitored.

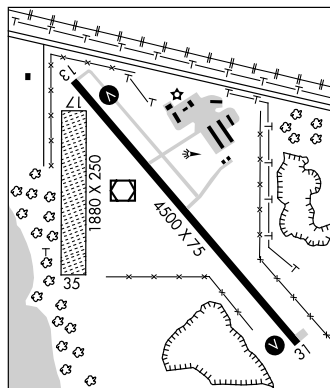**DODGE CENTER** (TOB) 1 SE UTC-6(-5DT) N44°01.08' W92°49.90'

GREEN BAY

1305 B S4 FUEL 100LL NOTAM FILE TOB

L-12J

RWY 16-34: H4500X75 (CONC) MIRL

IAP

RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 28'. Trees.

RWY 34: REIL. PAPI(P4L). —GA 3.0° TCH 40'.

RWY 04-22: 2390X200 (TURF)

RWY 04: Road.

RWY 22: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z†. Self svc fuel avbl with credit card. Rwy 04-22 CLOSED winter months. Ultralight tfc on and invof arpt. Windmills 1.5 miles SW of arpt. Rwy 04-22 marked with yellow cones. MIRL Rwy 16-34 preset on low ints, to increase ints and ACTIVATE REIL and PAPI Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.075 (507) 374-6369.**COMMUNICATIONS:** CTAF 122.9


® ROCHESTER APP/DEP CON 119.8 (1100-0400Z†)

® MINNEAPOLIS CENTER APP/DEP CON 132.35 (0400-1100Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE RST.

ROCHESTER (L) VORW/DME 112.0 RST Chan 57 N43°46.97'

W92°35.82' 319° 17.4 NM to fld. 1389/5E. HIWAS.

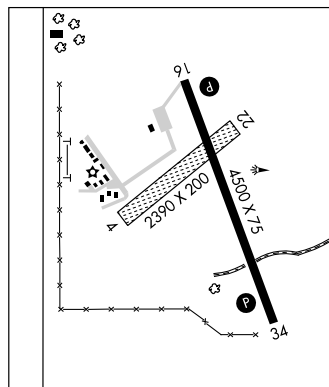

DULUTH

DULUTH INTL (DLH)(KDLH) CIV/MIL/ANG 5 NW UTC-6(-5DT) N46°50.53' W92°11.62'
 1428 B S4 **FUEL** 100LL, JET A1 OX 1, 2, 3, 4 AOE Class I, ARFF Index B
 NOTAM FILE DLH

GREEN BAY
 H-21, L-141
 IAP, DIAP, AD

RWY 09-27: H10162X150 (CONC-GRVD) S-94, D-180, ST-153,
 DT-650 PCN 75 R/C/W/U HIRL CL
RWY 09: ALSF2. PAPI(P4L)—GA 3.0° TCH 50'. Tree.
RWY 27: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 96'.
RWY 03-21: H5718X150 (ASPH-GRVD) S-52, D-100, ST-127,
 DT-361, PCN 16 F/C/X/T HIRL
RWY 03: REIL. PAPI(P4L)—GA 3.0° TCH 39'. Tree.
RWY 21: REIL. VASI(V4L)—GA 3.0° TCH 40'.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 09	03-21	8950

ARRESTING GEAR/SYSTEM

RWY 09 ←BAK-14 BAK-12B(B) (1500')

BAK-14 BAK-12B(B) (2260') →**RWY 27**

MILITARY SERVICE: JASU 9(AM32A-60) 2(A/M32A-86) 2(MC-11)
 6(MC-2A)(Mil). **FUEL** J8 (Mil) 100LL, Jet A, (Tran acft svcs avbl
 continuously—Monaco Air Duluth, call C218-727-2911).

FLUID SP LOX LHNIT(Mil), SP De-Ice LHOX LHNIT. (MONACO AIR
 DULUTH). **OIL** O-148(Mil). JOAP

AIRPORT REMARKS: Attended continuously. Deer and birds on and in/ovf arpt. High speed military jet traffic at 3000' to 3300' MSL in area. Rwy 03-21 poor condition with potential for debris. Rwy 09-27 appears to be the most affected area. Rwy 09-27 and north segment of Rwy 03-21 ungrooved. Landing fee for all commercial acft and all acft over 10000 pounds. When Rwy 03-21 is in use Twy C North of Rwy 09-27 may be restricted by air traffic control to acft with wingspans less than 49'. Windshear/downdrafts final apch Rwy 27. Twy C south of Twy A clsd winter months. Twy A4 clsd indef. Flight Notification Service (ADCUS) available.

MILITARY REMARKS: CAUTION: Bird hazard (phase II conditions) exists during 1 Sep through 31 Oct. Ctc SOF/Comd Post for info. J8 avbl at both civilian and military fueling facilities. **ANG** Opr Mon-Fri 1200-2130Z† except holidays. Ltd opr hr and tran svc avbl. Ctc Comd Post DSN 825-7370/71, C218-788-7370/71. Tran acft may not be svc when wind chill exceeds or is forecast to exceed -30° F. For rwy condition reading info, afld status and crash rescue capability ctc Comd Post or Twr.

WEATHER DATA SOURCES: ASOS (C218) 723-8340.

COMMUNICATIONS: ATIS 124.1 270.1 **UNICOM** 122.95 **PTD** 288.9

RCO 122.35 (PRINCETON RADIO)

Ⓡ **APP/DEP CON** 125.45 255.9 (1200-0500Z‡)

Ⓡ **MINNEAPOLIS CENTER APP/DEP CON** 127.9 (0500-1200Z‡)

TOWER 118.3 257.8 **GND CON** 121.9 348.6

ANG COMD POST 288.9 (6735 LSB)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLH.

(H) **VORTACW** 112.6 DLH Chan 73 N46°48.13' W92°12.17' 004° 2.4 NM to fld. 1428/5E.

VOR unusable:

233°-261° blo 10,000'.

LAKE SIDE (H) TACAN LKI (135.4) Chan 11 N46°50.63' W92°11.16' at fld. 1424/5E. Opr Tue-Fri 1300-0400Z‡, Mon and Sat 1300-2200Z‡. No NOTAM MP Thu 1400-1600Z‡.

PKLA NDB (MHW/LOM) 379 DL N46°50.74' W92°21.30' 089° 6.6 NM to fld. NDB unmonitored.

ILS 110.3 I-DLH Rwy 09. LOM PKLA NDB. LOM unmonitored.


COPTER ILS 110.3 I-DLH Rwy 09.

ILS 108.7 I-JUD Rwy 27. LOC unusable byd 25° left and right of course. GS unusable for coupled approaches blo 2550' MSL.

COPTER ILS 108.7 I-JUD Rwy 27.

ASR

COMM/NAV/WEATHER REMARKS: LAKE SIDE TACAN CAUTION—Do not select Chan 73 DLH for Chan 11 LKI. Twr 2049' on radial 099 Ch 73 DLH. Radar See Terminal Flip for Radar Minima.

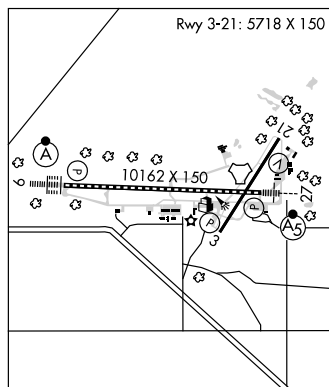

NORTH COUNTRY SPB (9MØ) 16 N UTC-6(-5DT) N47°00.90' W92°10.09' GREEN BAY
 1370 FUEL 100LL NOTAM FILE PNM
 WATERWAY 09-27: 5000X300 (WATER)
 WATERWAY 03-21: 5000X300 (WATER)
 WATERWAY 13-31: 5000X300 (WATER)
 SEAPLANE REMARKS: Unattended. 100LL fuel available for emerg purposes only.
 COMMUNICATIONS: CTAF 122.7 UNICOM 122.8

SKY HARBOR (DYT) 6 SE UTC-6(-5DT) N46°43.31' W92°02.61' GREEN BAY

610 B S4 FUEL 100LL AOE NOTAM FILE DYT L-141

RWY 14-32: H3050X75 (ASPH) MIRL IAP

RWY 14: REIL. PAPI(P4L)—GA 4.0° TCH 24'. Trees.

RWY 32: REIL. PAPI(P4L)—GA 4.0° TCH 20'. Thld dsplcd 658'.

Trees.

AIRPORT REMARKS: Attended May-Oct SR-SS, Nov-Apr 1400-2200Z†.

Fuel avbl 24 hrs with credit card. Birds on and invof arpt. Trees obscuring AER 32. Rwy 12 tree +90', 2200' from AER 12. Be alert: extensive acft activity invof Richard I. Bong Arpt 2 miles SW. North ramp area rough. ACTIVATE MIRL Rwy 14-32, PAPI Rwy 14 and Rwy 32 and REIL Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.275 (218) 720-4886.

COMMUNICATIONS: CTAF/UNICOM 122.7

® DULUTH APP/DEP CON 125.45 (1200-0500Z†) CLNC DEL 124.8

® MINNEAPOLIS CENTER APP/DEP CON 127.9 (0500-1200Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLH.


DULUTH (H) VORTACW 112.6 DLH Chan 73 N46°48.13'

W92°12.17' 121° 8.2 NM to fld. 1428/5E.

WATERWAY 13-31: 10000X2000 (WATER)

WATERWAY 09-27: 5000X1500 (WATER)

SEAPLANE REMARKS: Wind surfing activity invof sealanes May through Sept. For seaplane ops be alert for extensive water sport activities in Lake Superior Bay.

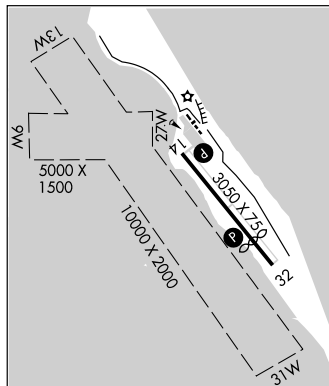

EAST GULL LAKE (9Y2) 8 NW UTC-6(-5DT) N46°23.00' W94°21.72' TWIN CITIES

1236 NOTAM FILE PNM

RWY 13-31: 2618X160 (TURF)

RWY 13: Tree. RWY 31: Trees.

AIRPORT REMARKS: Unattended. CLOSED winters. Watch for vehicles and pedestrians crossing rwy. Low spot 100-200' north of AER 31 thld. Rwy 13-31 NSTD markings, marked with yellow cones.

COMMUNICATIONS: CTAF 122.9

ELBOW LAKE MUNI—PRIDE OF THE PRAIRIE (Y63) 1 SW UTC-6(-5DT) TWIN CITIES

N45°59.16' W95°59.52'

1205 B S4 FUEL 100LL NOTAM FILE Y63 L-14H

RWY 14-32: H3400X60 (ASPH) MIRL

RWY 14: REIL. PAPI(P4L)—GA 3.0° TCH 25'. RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 25'. Ground.

AIRPORT REMARKS: Attended. Mon-Fri 1300-0000Z†. Self service fuel with credit card. Ultralights on and invof arpt. MIRL Rwy 14-32 preset on low ints, to increase ints and ACTIVATE REIL Rwy 14 and Rwy 32 and PAPI Rwy 14 and Rwy 32—CTAF.


WEATHER DATA SOURCES: AWOS-3 118.075 (218) 685-6456.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE FFM.

FERGUS FALLS (T) VORW/DME 110.4 FFM Chan 41 N46°17.36' W96°09.41' 154° 19.5 NM to fld.


ELY MUNI (ELO) 4 S UTC-6(-5DT) N47°49.47' W91°49.84'
 1456 B FUEL 100LL, JET A LRA NOTAM FILE ELO
RWY 12-30: H5600X100 (ASPH) S-60, D-100 MIRL 0.3% up SE
RWY 12: REIL. PAPI(P4L)—GA 3.0° TCH 38'. Trees.
RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 38'. Trees.
AIRPORT REMARKS: Attended 1400-2300Z†. For attendant after hrs call 218-365-6335. Rwy 12 and Rwy 30 REIL are omnidirectional. Rwy 12 REIL OTS indef. Rwy 30 REIL OTS indef. Rwy 12 and Rwy 30 PAPI OTS indef. MIRL Rwy 12-30 preset low ints to increase ints and ACTIVATE PAPI and REIL Rwy 12 and Rwy 30—CTAF.
WEATHER DATA SOURCES: AWOS-3 132.025 (218) 365-3814.
COMMUNICATIONS: CTAF/UNICOM 122.8
 RCO 122.1R 109.6T (PRINCETON RADIO)
AIRSPACE: CLASS E svc Sep-Mar 1400-2300Z†, Apr-May 1500-0000Z†, Jun-Aug 1500-0300Z† other times CLASS G.
RADIO AIDS TO NAVIGATION: NOTAM FILE ELO.
(L) VOR/DME 109.6 ELO Chan 33 N47°49.31' W91°49.81' at fld. 1489/OE.
 VOR unusable 105°-160° byd 20 NM; 161°-179°, 220°-235°.
 DME portion unusable 140°-210° byd 30 NM blo 4000'.

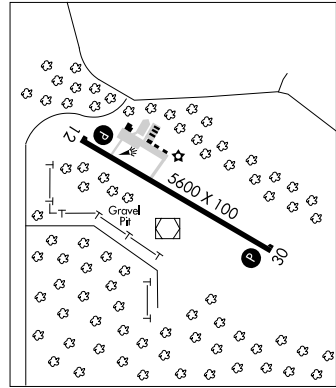

GREEN BAY
 H-21, L-141
 IAP

EVELETH

EVELETH-VIRGINIA MUNI (EVM) 3 SE UTC-6(-5DT) N47°25.51' W92°29.89'
 1379 B S2 FUEL 100LL, JET A NOTAM FILE EVM
RWY 09-27: H4215X100 (ASPH) S-12 MIRL
RWY 09: PAPI(P4R)—GA 3.0° TCH 30'. Trees.
RWY 27: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees.
RWY 05-23: 2704X110 (TURF)
RWY 05: Trees.
RWY 23: Thld dsplcd 885'. Trees.
RWY 14-32: H2505X100 (ASPH) S-25, D-43 MIRL 0.4% up NW
RWY 14: Trees. **RWY 32:** Road.
AIRPORT REMARKS: Attended Mon-Fri 1400-0100Z†, Sat 1400-0000Z†, Sun 1500-2300Z†. For fuel after hrs call 218-258-3639. Deer and birds on and invof arpt. Rwy 05-23 CLOSED winter months. Rwy 05-23 length and Rwy 23 dsplcd thld marked with yellow cones. ACTIVATE MIRL Rwy 09-27 and Rwy 14-32, REIL Rwy 27 and PAPI Rwy 09 and Rwy 27—CTAF.
WEATHER DATA SOURCES: AWOS-3 108.2 EVM (218) 744-2369.
COMMUNICATIONS: CTAF/UNICOM 122.7
 RCO 122.45 (PRINCETON RADIO)
 (R) DULUTH APP/DEP CON 125.45 (1200-0500Z†)
 (R) MINNEAPOLIS CENTER APP/DEP CON 127.9 (0500-1200Z†)
RADIO AIDS TO NAVIGATION: NOTAM FILE EVM.
(T) VOR/DME 108.2 EVM Chan 19 N47°25.33' W92°29.92' at fld. 1371/1E. AWOS-3. Unmonitored.

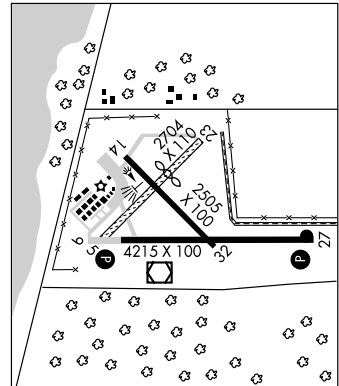

GREEN BAY
 L-141
 IAP

SKY HARBOR SPB (9Y5) 2 SE UTC-6(-5DT) N47°27.58' W92°28.59'

GREEN BAY

1376 S4 FUEL 100LL NOTAM FILE PNM
WATERWAY 07-25: 6500X1000 (WATER)
WATERWAY 03-21: 6500X1000 (WATER)
WATERWAY 14-32: 4500X1000 (WATER)

SEAPLANE REMARKS: Attended May-Oct Mon-Fri 1400-2300Z†, Nov-Apr Mon-Fri 1400-2230Z†. For svc after hrs and weekends call 218-744-4104. CAUTION: A rock reef lays from the southwest tip of the island in the center of the lake westward to the shoreline.

COMMUNICATIONS: CTAF 122.7

FAIRMONT MUNI (FRM) 2 SE UTC-6(-5DT) N43°38.64' W94°24.94'

OMAHA

1162 B S2 FUEL 100LL, JET A NOTAM FILE FRM

H-5C, L-121

RWY 13-31: H5505X100 (ASPH-PFC) S-35, D-40 HIRL

IAP

RWY 13: REIL. VASI(V4L)—GA 3.0° TCH 48'. Road.

RWY 31: MALSR. VASI(V4L)—GA 3.0° TCH 46'.

RWY 02-20: H3300X75 (ASPH) S-12 MIRL

AIRPORT REMARKS: Attended Mon-Sat 1400-2300Z†, Sun 1830-2200Z†. For svc after hrs call 507-238-9216. Self service fuel with credit card. Migratory bird hazard spring and fall, gulls on and invof arpt. ACTIVATE MIRL Rwy 02-20, HIRL Rwy 13-31, VASI and REIL Rwy 13, VASI and MALSR Rwy 31—122.8.

WEATHER DATA SOURCES: AWOS-3 110.2 FRM (507) 238-1562.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 123.6R 110.2T (PRINCETON RADIO)

MINNEAPOLIS CENTER APP/DEP CON 127.75

AIRSPACE: CLASS E svc Mon-Fri 1130-0130Z†, Sat 1130-1900Z†, Sun 1600-2300Z† other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE FRM.


(L) VOR/DME 110.2 FRM Chan 39 N43°38.76' W94°25.35'

at fld. 1164/7E. AWOS-3

MONTZ NDB (LOM) 420 FQ N43°34.43'

W94°19.08' 311° 6.0 NM to fld.

ILS 111.1 I-FQJ Rwy 31. LOM MONTZ NDB. Glide Slope unusable for coupled apchs blo 1480'.

**FALLS INTL** (See INTERNATIONAL FALLS)**FARIBAUT MUNI** (FBL) 3 NW UTC-6(-5DT) N44°19.64' W93°18.65'

OMAHA

1060 B S4 FUEL 100LL, JET A OX 4 NOTAM FILE FBL

L-12J

RWY 12-30: H4254X72 (ASPH) S-16, D-22 MIRL 0.3% up NW

IAP

RWY 12: REIL. VASI(V2L)—GA 3.0° TCH 22'. Trees.

RWY 30: REIL. VASI(V2L)—GA 3.0° TCH 22'. Thld dsplcd 237'.

Road.

AIRPORT REMARKS: Attended May-Sep 1400-0100Z†, Oct-Apr 1400-2300Z†. For svc after hrs call 507-838-7152. Self svc fuel with credit card. When landing on Rwy 12, be alert for turbulence and possible windshear when winds are out of the south.

Ultralights and gliders use twy and extended twy parallel to Rwy 12-30. Ultralights and gliders using twy fly pattern on NE side of Rwy 12-30. ACTIVATE MIRL Rwy 12-30, and REIL Rwy 12 and Rwy 30 —CTAF. VASI Rwy 12 and Rwy 30 on continuously.

WEATHER DATA SOURCES: AWOS-3 111.2 FOW (507) 332-2505.**COMMUNICATIONS:** CTAF/UNICOM 122.8

® MINNEAPOLIS APP/DEP CON 134.7


GCO 121.725 (MINNEAPOLIS CLNC and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

HALFWAY (T) VORW/DME 111.2 FOW Chan 49 N44°12.27'

W93°22.23' 017° 7.8 NM to fld. 1098/2E. AWOS-3.

Unmonitored.

**FARMINGTON** N44°37.86' W93°10.92' NOTAM FILE PNM

TWIN CITIES

(H) VORTAC 115.7 FGT Chan 104 259° 2 NM to Airlake. 972/6E.

H-21, L-121, 141, A

VOR unusable:

DME unusable 260°-320° byd 25 NM blo 4000'.

RCO 122.1R 115.7T (PRINCETON RADIO)

FERGUS FALLS MUNI-EINAR MICKELSON FLD (FFM) 3 W UTC-6(-5DT)

TWIN CITIES

H-2H, L-14H

IAP

N46°17.06' W96°09.40'

1183 B S2 FUEL 100LL, JET A, MOGAS NOTAM FILE FFM

RWY 13-31: H5639X100 (ASPH) S-60, D-90, ST-114 MIRL
RWY 13: REIL. PAPI(P4L). P-line. RWY 31: MALSR. PAPI(P4L).RWY 17-35: H3301X75 (ASPH) S-16, D-22 MIRL 0.8% up N
RWY 17: Trees. RWY 35: REIL.

AIRPORT REMARKS: Attended Mon-Fri 1300-0100Z±, Sat

1400-1800Z±. For attendant after hrs call 218-739-9217 or
218-731-9546. Ultralights on and invof arpt. Ultralight pattern
1800(617). Deer and waterfowl on and invof arpt. Rwy 13 PAPI
OTS indef. PAPI not coincident with Rwy 31 ILS glide slope.ACTIVATE MIRL Rwy 13-31 and Rwy 17-35, MALSR and PAPI Rwy
31, REIL Rwy 35, REIL and PAPI Rwy 13—CTAF.

WEATHER DATA SOURCES: AWOS-3 110.4 FFM (218) 736-7216.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.35 (PRINCETON RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE FFM.


(T) VOR/DME 110.4 FFM Chan 41 N46°17.36'

W96°09.41' at fld. 1201/5E. AWOS-3. Unmonitored.

HAMRE NDB (LOM) 337 FF N46°13.24'

W96°03.42' 308° 5.7 NM to fld.

ILS 111.5 I-FFM Rwy 31. LOM HAMRE NDB. GS unusable for coupled approaches blo 1400' MSL.

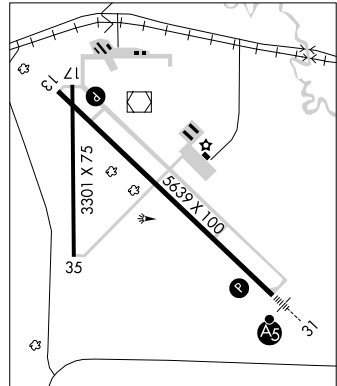**FERTILE MUNI** (D14) 1 NW UTC-6(-5DT) N47°33.12' W96°17.53'

TWIN CITIES

L-14H

1135 B FUEL 100LL TPA-2135(1000) NOTAM FILE PNM

RWY 14-32: H3002X60 (ASPH) LIRL

RWY 14: SAVASI(S2L)—GA 3.0°.

RWY 32: SAVASI(S2L)—GA 3.0°.


AIRPORT REMARKS: Unattended. Fuel avbl 24 hr with credit card. Be
alert for vehicle tfc on twys. Rwy 14-32 bleached. ACTIVATE LIRL
Rwy 14-32, VASI Rwy 14 and Rwy 32—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

RADIO AIDS TO NAVIGATION: NOTAM FILE TVF.

THIEF RIVER FALLS (L) VOR/DME 108.4 TVF Chan 21 N48°04.16'

W96°11.19' 180° 31.4 NM to fld. 1039/8E.

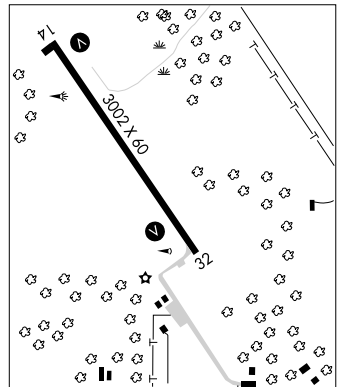**FIELD OF DREAMS** (See HINCKLEY)**FILLMORE CO** (See PRESTON)**FLAG ISLAND** FGN N49°19.00' W94°54.00'/1080.

TWIN CITIES

H-21

AWOS-3 118.375 218-223-4023.

FLYING A (See CHATFIELD)**FLYING CLOUD** (See MINNEAPOLIS)**FLYING CLOUD** N44°49.52' W93°26.56' NOTAM FILE FCM.

TWIN CITIES

(L) VOR/DME 117.7 FCM Chan 124 at Flying Cloud Arpt. 900/1E

VOR/DME unusable 290°-305° blo 4000'.

H-21, L-121, 14H, A

FOREST LAKE (25D) 2 SW UTC-6(-5DT) N45°14.86' W92°59.66'
 925 B S5 FUEL 100LL TPA-1925(1000) NOTAM FILE PNM
 RWY 13-31: 2650X150 (TURF) LIRL

GREEN BAY

RWY 13: Trees.

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs self service with credit card. Rwy 13-31 marked with yellow cones.

Rwy 31 is calm wind rwy.

COMMUNICATIONS: CTAF/UNICOM 122.7

FOSSTON MUNI (FSE) 1 NW UTC-6(-5DT) N47°35.57' W95°46.41'
 1277 B FUEL 100LL NOTAM FILE FSE

TWIN CITIES

L-14H

IAP

RWY 16-34: H3501X75 (ASPH) S-12.5 MIRL (NSTD) 0.3% up SE

RWY 16: REIL. PAPI(P4L)—GA 2.8° TCH 25. Trees.

RWY 34: REIL. PAPI(P4L)—GA 2.8° TCH 25. Road.

AIRPORT REMARKS: Unattended. Self svc fuel avbl with credit card. Auto traffic occasionally on arpt to and from private seaplane dock NW of arpt. Private seaplane facility NW of arpt. NSTD MIRL Rwy 16-34, Rwy 34 lghts not amber last half of rwy. MIRL Rwy 16-34 preset low ints to increase ints and ACTIVATE PAPI and REIL Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 224 FSE (218) 435-6448.

COMMUNICATIONS: CTAF 122.9

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 134.75

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE TVF.


THIEF RIVER FALLS (L) VOR/DME 108.4 TVF Chan 21

N48°04.16' W96°11.19'

142° 33.1 NM to fld. 1039/8E.

NDB (MHW) 224 FSE N47°35.38' W95°46.19' at fld.

AWOS-3. NOTAM FILE FSE.



GALEX N47°07.82' W93°28.88' NOTAM FILE GPZ.

TWIN CITIES

NDB (LOM) 272 GP 344° 5.0 NM to Grand Rapids/Itasca Co Gordon Newstrom Fld.

GARNO N44°30.11' W95°54.68' NOTAM FILE MML.

OMAHA

NDB (LOM) 253 GB 124° 4.8 NM to Southwest Minnesota Rgnl Marshall/Ryan Fld.

GLENCOE MUNI (GYL) 3 SE UTC-6(-5DT) N44°45.36' W94°04.87'
 992 B FUEL 100LL TPA-1792(800) NOTAM FILE GYL

TWIN CITIES

L-121, 14H

IAP

RWY 13-31: H3300X75 (ASPH) MIRL

RWY 13: Trees. RWY 31: Trees.

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs with credit card. Ultralights on and invof arpt. Deer on and invof rwy dusk to dawn. ACTIVATE MIRL Rwy 13-31 preset to low ints, to increase ints—CTAF.

WEATHER DATA SOURCES: AWOS-3 407 GYL (320) 864-5830.

COMMUNICATIONS: CTAF/UNICOM 122.8


Ⓡ MINNEAPOLIS APP/DEP CON 134.7

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

DARWIN (L) VORTAC 109.0 DWN Chan 27 N45°05.25' W94°27.23' 134° 25.5 NM to fld. 1130/7E.

NDB (MHW) 407 GYL N44°45.65' W94°05.15' at fld.

AWOS-3. NOTAM FILE GYL.



GLENWOOD MUNI (GHW) 3 E UTC-6(-5DT) N45°38.63' W95°19.23'

TWIN CITIES

1393 B FUEL 100LL NOTAM FILE GHW

L-14H

RWY 15-33: H4500X75 (ASPH) LIRL 0.4% up NW

IAP

RWY 15: PAPI(P4L). GA 3.0° TCH 33'.

RWY 33: PAPI(P4L). GA 3.0° TCH 25'.

RWY 05-23: 2801X209 (TURF) 0.5% up NE

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z \ddagger . For fuel call 320-634-4772. Deer on and invof arpt. Rwy 05-23 CLOSED winter months. Rwy 05-23 marked with 'A' frames.

WEATHER DATA SOURCES: AWOS-3 346 GHW (320) 634-5660.**COMMUNICATIONS:** CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 126.1

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE AXN.


ALEXANDRIA (L) VORW/DME 112.8 AXN Chan 75 N45°57.50'

W95°13.96' 184° 19.2 NM to fld.

1367/7E. HIWAS.

NDB (MHW) 346 GHW N45°38.66' W95°19.11' at fld. AWOS-3.

NOTAM FILE GHW. VFR only.

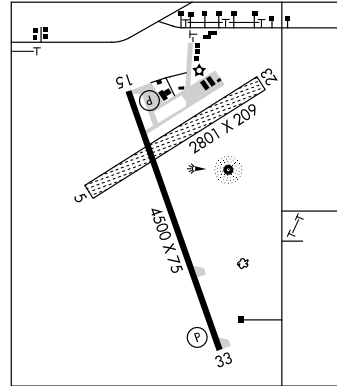**GOPHER** N45°08.74' W93°22.39' NOTAM FILE PNM.

TWIN CITIES

(H) VORTACW 117.3 GEP Chan 120 165° 5.1 NM to Crystal. 877/6E. HIWAS.

H-21, L-12J, 14I, A

GRAND MARAIS**GRAND MARAIS/COOK CO** (CKC) 7 NW UTC-6(-5DT) N47°50.30' W90°22.98'

GREEN BAY

1799 B S4 FUEL 100LL, JET A LRA NOTAM FILE CKC

L-14I

RWY 09-27: H4199X75 (ASPH) MIRL

IAP

RWY 09: REIL. PAPI(P4L). Trees.

RWY 27: REIL. PAPI(P4L). Trees.

AIRPORT REMARKS: Attended 1400-2300Z \ddagger . For svc after hrs call 218-387-3024. ACTIVATE MIRL Rwy 09-27, PAPI Rwy 09 and Rwy 27 and REIL Rwy 09 and Rwy 27—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.925 (218) 387-1971.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.3 (PRINCETON RADIO)


RADIO AIDS TO NAVIGATION: NOTAM FILE IWD.

IRONWOOD (L) VORTACW 108.8 IWD Chan 25 N46°31.94'

W90°07.55' 351° 79.1 NM to fld. 1230/1E. HIWAS.

COOK COUNTY NDB (MHW) 358 CKC N47°50.40' W90°23.14'

at fld. NOTAM FILE CKC.

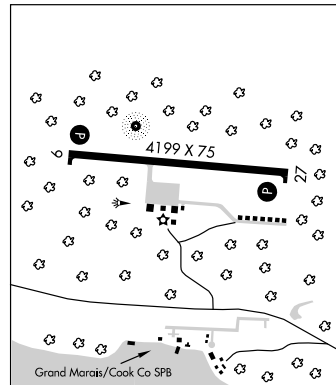**GRAND MARAIS/COOK CO SPB** (ØG5) 6 NW UTC-6(-5DT) N47°48.99' W90°23.01'

GREEN BAY

1635 S4 FUEL 100LL, JET A LRA NOTAM FILE PNM

WATERWAY 09-27: 15000X1500 (WATER)

WATERWAY 03-21: 3000X2000 (WATER)

SEAPLANE REMARKS: Attended 1400-2300Z \ddagger . For fuel cto arpt on 122.8 or call 218-387-2012. Customs avbl May 15-Oct 15 or by prior arrangement, call 218-475-2244.

COMMUNICATIONS: CTAF/UNICOM 122.8

GRAND MARAIS RCO 122.3 (PRINCETON RADIO)

GRAND RAPIDS/ITASCA CO GORDON NEWSTROM FLD (GPZ) 2 SE UTC-6(-5DT)

TWIN CITIES

H-21, L-14H

IAP

N47°12.56' W93°30.60'

1355 B S4 FUEL 100LL, JET A OX 2 Class IV, ARFF Index A NOTAM FILE GPZ

RWY 16-34: H5755X100 (ASPH-PFC) S-23, D-38, DT-78

HIRL 1.0% up SE

RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 47'. Thld dspcd 423'. Tree.

RWY 34: MALSR. PAPI(P4L)—GA 3.0° TCH 49'. Tree.

RWY 05-23: 3000X60 (ASPH) S-12.5 MIRL

RWY 05: REIL. Trees. RWY 23: REIL. Trees.

RWY 10-28: 1450X150 (TURF)

RWY 10: Trees. RWY 28: Trees.

AIRPORT REMARKS: Attended daltg hrs. Rwy 05-23 and Rwy 10-28 CLOSED to wheel acct and rwy not maintained when snow is present. Deer and birds on and invof arpt. Seaplane ops on Lily Lake adjacent north of arpt. PPR for landing on Lily Lake, call 218-326-1226. Rwy 34 is the designated no wind rwy. Rwy 16-34 has a 582' paved area north end of rwy. Rwy 05-23 and Rwy 10-28 marked with thld and boundary markers. ACTIVATE HIRL Rwy 16-34, MIRL Rwy 05-23, PAPI Rwy 16 and Rwy 34, REIL Rwy 05, Rwy 16 and Rwy 23 and MALSR Rwy 34—122.8.

WEATHER DATA SOURCES: AWOS-3 118.425 GPZ (218) 326-8337.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.05 (PRINCETON RADIO)

① MINNEAPOLIS CENTER APP/DEP CON 127.9

AIRSPACE: CLASS E svc Mon-Sat 1100-0300Z, Sun 1400-0300Z other times CLASS G.**RADIO AIDS TO NAVIGATION:** NOTAM FILE GPZ.

(L) VORW/DME 111.4 GPZ Chan 51 N47°09.82' W93°29.31' 336° 2.9 NM to fld. 1400/6E.


VOR portion unusable 120°-192° byd 12 NM blo 5000'.

DME portion unusable 140°-215° byd 20 NM blo 3000'.

215°-045° byd 20 NM blo 3500'.

GALEX NDB (LOM) 272 GP N47°07.82' W93°28.88' 344° 4.9 NM to fld.

ILS 110.1 I-GPZ Rwy 34. Class IT. LOM GALEX NDB.

**GRANITE FALLS MUNI/LENZEN-ROE MEM FLD** (GDB) 4 S UTC-6(-5DT)

TWIN CITIES

L-121, 14H

IAP

N44°45.20' W95°33.36'

1047 B FUEL 100LL NOTAM FILE GDB

RWY 15-33: H4350X75 (ASPH) MIRL

RWY 15: REIL. PAPI(P4L)—GA 3.0° Trees.

RWY 33: REIL. PAPI(P4L)—GA 3.0° Thld dspcd 650'. Road.

AIRPORT REMARKS: Unattended. Self service fuel avbl 24hrs with credit card. Deer on and invof arpt. Noise sensitive area 1.5 miles in radius off north end of Rwy 15-33. MIRL Rwy 15-33 preset on low ints dusk to dawn, to increase ints and ACTIVATE REIL Rwy 15 and Rwy 33, PAPI Rwy 15 and Rwy 33—CTAF. NOTE: See Special Notices—Aerobatic Practice Areas.

WEATHER DATA SOURCES: AWOS-3 120.1 (320) 564-9388.**COMMUNICATIONS:** CTAF/UNICOM 122.8


① MINNEAPOLIS CENTER APP/DEP CON 127.1

RADIO AIDS TO NAVIGATION: NOTAM FILE MVE.

MONTEVIDEO (T)VORW/DME 111.6 MVE Chan 53 N44°58.36'

W95°42.72' 148° 14.8 NM to fld.

1034/5E. Unmonitored.

**GRYGLA MUNI-MEL WILKENS FLD** (3G2) 1 SW UTC-6(-5DT) N48°17.65' W95°37.56'

TWIN CITIES

1177 NOTAM FILE PNM

RWY 17-35: 3437X92 (TURF) LIRL

AIRPORT REMARKS: Unattended. Deer on and invof arpt. Ultralight tfc on and invof arpt. Rwy 17-35 marked with yellow cones.

COMMUNICATIONS: CTAF 122.9

HALFWAY N44°12.27' W93°22.23' NOTAM FILE PNM

OMAHA

(T) VOR/DME 111.2 FOW Chan 49 134° 6.8 NM to Owatonna Degner Rgnl.

L-12J

1098/2E. AWOS-3. Unmonitored.

VOR portion unusable 230°-250°.

HALLOCK MUNI (HCO) 1 S UTC-6(-5DT) N48°45.16' W96°56.58'

TWIN CITIES

819 B FUEL 100LL NOTAM FILE HCO

L-14G

RWY 13-31: H4007X75 (ASPH) S-30, D-36, DT-65 MIRL

IAP

RWY 13: REIL. VASI(V2L)—GA 3.0° TCH 31'. RWY 31: REIL. VASI(V2L)—GA 3.0° TCH 30'.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z†. Fuel avbl 24 hrs with credit card. Ultralight tfc on and infov arpt.

ACTIVATE MIRL Rwy 13-31 and REIL Rws 13 and 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 126.475 (218) 843-2415.

COMMUNICATIONS: CTAF/UNICOM 122.8

MINNEAPOLIS APP/DEP CON 132.15

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

HUMBOLDT(H) VORTAC 112.4 HML Chan 71 N48°52.15' W97°07.03' 126° 9.8 NM to fld. 800/9E.

HAMRE N46°13.24' W96°03.42' NOTAM FILE FFM.

TWIN CITIES

NDB (LOM) 337 FF 308° 5.7 NM to Fergus Falls Muni-Einar Mickelson Fld.

HARVI N48°00.40' W96°05.75' NOTAM FILE TVF.

TWIN CITIES

NDB (LOM) 260 HY 310° 5.0 NM to Thief River Falls Rgnl. Unmonitored.

HAWLEY MUNI (Ø4Y) 2 W UTC-6(-5DT) N46°53.03' W96°21.02'

TWIN CITIES

1208 B FUEL 100LL NOTAM FILE PNM

L-14H

RWY 16-34: H3404X75 (ASPH) S-12.5 MIRL 0.3% up NW

IAP

RWY 16: PAPI(P2L).

RWY 34: PAPI(P2L). Trees.

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs with credit card.

Ultralights on and infov arpt. Rwy 16 hold short line missing. PAPI

Rwy 16 and Rwy 34 OTS indef. ACTIVATE MIRL Rwy 16-34 and

PAPI Rwy 16 and Rwy 34—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8


Ⓡ FARGO APP/DEP CON 120.4 (1200-0500Z†)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 127.35 (0500-1200Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE FAR.

FARGO (H) VORTACW 116.2 FAR Chan 109 N46°45.20'

W96°51.08' 060° 22.1 NM to fld. 910/9E. HIWAS.



HECTOR MUNI (1D6) 1 S UTC-6(-5DT) N44°43.86' W94°42.88'

TWIN CITIES

1077 FUEL 100LL NOTAM FILE PNM

RWY 12-30: H2776X50 (ASPH) S-13, D-18 RWY LGTS (NSTD)

RWY 12: Road.

RWY 05-23: 2580X165 (TURF)

RWY 05: Road.

AIRPORT REMARKS: Attended continuously. For svc call 320-848-2745. Ultralight tfc on and infov arpt. Water twr N.

Rwy 05-23 marked with yellow cones. NSTD lgts mounted in yellow cones.

COMMUNICATIONS: CTAF/UNICOM 122.8

HENNING MUNI (Ø5Y) 1 S UTC-6(-5DT) N46°18.23' W95°26.37'

TWIN CITIES

1455 B FUEL 100LL TPA-2250(795) NOTAM FILE PNM

RWY 17-35: 3280X200 (TURF) LIRL (NSTD)

AIRPORT REMARKS: Unattended. Fuel avb 24 hrs with credit card. Ultralights on and invof arpt. Rwy 17-35 marked with yellow cones. Rwy 17-35 NSTD LIRL, spacing irregular.

COMMUNICATIONS: CTAF 122.9

HERMAN MUNI (Ø6Y) 2 NW UTC-6(-5DT) N45°49.80' W96°09.64'

TWIN CITIES

1068 B FUEL 100LL TPA-1868(800) NOTAM FILE PNM

RWY 14-32: H2997X60 (ASPH) LIRL (NSTD)

AIRPORT REMARKS: Unattended. For fuel call 320-677-2746. Ultralights on and invof arpt. Rwy 14 and Rwy 32 NSTD LIRL.

COMMUNICATIONS: CTAF 122.9

HIBBING N47°18.09' W92°42.24' NOTAM FILE HIB

GREEN BAY

(L) VOR/DME 110.8 HIB Chan 45 311° 7.5 NM to Chisholm-Hibbing. 1312/2E.

L-141

VOR portion unusable 113°-126°, DME unusable byd 33 NM blo 3,000'.

RCO 122.6 (PRINCETON RADIO)

HIBBING

CHISHOLM-HIBBING (HIB) 4 SE UTC-6(-5DT) N47°23.20' W92°50.34'

GREEN BAY

1354 B S4 FUEL 100LL, JET A Class I, ARFF Index A NOTAM FILE HIB

H-21, L-141

RWY 13-31: H6760X150 (ASPH-GRVD) S-60, D-100, ST-127, DT-160 HIRL

IAP

RWY 13: MALSR. VASI(V4L)—GA 3.0° TCH 45'. Road.

RWY 31: MALSR. VASI(V4L)—GA 2.9° TCH 57'. Trees.

RWY 04-22: H3096X75 (ASPH) S-35, D-45

RWY 04: Road.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 04: TORA-3075 TODA-3075 ASDA-3075 LDA-3075

RWY 13: TORA-6758 TODA-6758 ASDA-6758 LDA-6758

RWY 22: TORA-3075 TODA-3075 ASDA-3075 LDA-3075

RWY 31: TORA-6758 TODA-6758 ASDA-6758 LDA-6758

AIRPORT REMARKS: Attended 1100-0500Z†. Airfield conditions unmonitored between 0500-1100Z†. Rwy 04-22 CLOSED during the hrs of darkness. PPR for unscheduled air carrier ops with more than 30 passenger seats, call arpt manager 218-262-3451. Rwy 04-22 not avbl for air carrier ops with more than 9 passenger seats. HIRL Rwy 13-31 preset on low ints, to increase ints and ACTIVATE VASI Rwy 13 and Rwy 31, MALSR Rwy 13 and Rwy 31—CTAF.

WEATHER DATA SOURCES: ASOS 126.425 (218) 263-8384.

COMMUNICATIONS: CTAF/UNICOM 123.0

HIBBING RCO 122.6 (PRINCETON RADIO)

Ⓡ DULUTH APP/DEP CON 125.45 (1200-0500Z†) CLNC DEL 127.4

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 127.9 (0500-1200Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE HIB.


HIBBING (L) VOR/DME 110.8 HIB Chan 45 N47°18.09' W92°42.24' 311° 7.5 NM to fld. 1312/2E.

ILS 109.5 I-HIB Rwy 31. Class IC.

ILS 110.5 I-JAE Rwy 13. Class IC. GS unusable for coupled approaches blo 2388'.

GS unmonitored.

COMM/NAV/WEATHER REMARKS: Contact Duluth App Con to ACTIVATE Rwy 13 and Rwy 31 ILS 1200-0500Z†.



HILL CITY-QUADNA MOUNTAIN (Ø7Y) 2 S UTC-6(-5DT) N46°57.35' W93°35.85'

TWIN CITIES

1289 B NOTAM FILE PNM

RWY 16-34: 2850X150 (TURF)

RWY 16: Trees. Rgt tfc.

RWY 34: Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED sunset-sunrise. Rwy 16-34 marked with yellow cones.

COMMUNICATIONS: CTAF 122.9

HINCKLEY**FIELD OF DREAMS** (04W) 1 E UTC-6(-5DT) N46°01.37' W92°53.71'**TWIN CITIES**

1021 B FUEL 100LL NOTAM FILE PNM

L-141

RWY 06-24: H2751X75 (ASPH) MIRL 0.4% up SW

IAP

RWY 06: Thld dsplcd 190'. Tree. RWY 24: Thld dsplcd 394'. Tree.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z±. Self svc fuel avbl 24 hrs with credit card. ACTIVATE MIRL Rwy 06-24—CTAF.**WEATHER DATA SOURCES:** AWOS-3 (320) 384-6169.**COMMUNICATIONS:** CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 121.05

RADIO AIDS TO NAVIGATION: NOTAM FILE STC.ST CLOUD (T) VOR/DME 112.1 STC Chan 58 N45°32.96' W94°03.52' 056° 56.5 NM to fld. 1023/3E ASOS.
VOR unmonitored.**HOPEY** N44°52.40' W92°56.53' NOTAM FILE STP.**TWIN CITIES**

NDB (MHW) 400 PPI 303° 6.2 NM to St Paul Downtown Holman Fld.

L-12J, 141, A

HOUSTON CO (See CALEDONIA)**HUMBOLDT** N48°52.15' W97°07.03' NOTAM FILE PNM.**TWIN CITIES**

(H) VORTAC 112.4 HML Chan 71 303° 6.6 NM to Pembina Muni. 800/9E.

H-2H, L-146

RCO 122.1R 112.4T (PRINCETON RADIO)

HUSSK N45°28.74' W93°58.12' NOTAM FILE STC.**TWIN CITIES**

NDB (LOM) 342 ST 314° 5.6 NM to St Cloud Muni.

HUTCHINSON MUNI-BUTLER FIELD (HCD) 2 S UTC-6(-5DT) N44°51.59' W94°22.95'**TWIN CITIES**

1062 B S4 FUEL 100LL, JET A NOTAM FILE HCD

L-121, 14H

RWY 15-33: H4000X75 (ASPH) MIRL

IAP

RWY 15: REIL. PAPI(P4L)—GA 3.0° TCH 40'.

RWY 33: REIL. PAPI(P4L)—GA 3.0 TCH 40'. Trees.

AIRPORT REMARKS: Attended continuously. Fuel avbl 24 hrs with credit card. Parachute Jumping. ACTIVATE MIRL Rwy 15-33; REIL Rwy 15 and Rwy 33, PAPI Rwy 15 and Rwy 33—CTAF.**WEATHER DATA SOURCES:** AWOS-3 118.525 (320) 587-3343.**COMMUNICATIONS:** CTAF/UNICOM 122.8

® MINNEAPOLIS CENTER APP/DEP CON 127.1

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)


RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

DARWIN (L) VORTAC 109.0 DWN Chan 27 N45°05.25'

W94°27.23' 160° 14.0 NM to fld. 1130/7E.

NDB (MHW) 209 HCD N44°51.42' W94°22.98' at fld.

NOTAM FILE HCD.

**INTERNATIONAL FALLS** N48°33.95' W93°24.34' NOTAM FILE INL.**TWIN CITIES**

(L) VORTACW 111.0 INL Chan 47 at Falls Intl. 1180/6E. HIWAS.

L-14H

RCO 123.6 (PRINCETON RADIO)

INTERNATIONAL FALLS**FALLS INTL** (INL) 0 S UTC-6(-5DT) N48°33.94' W93°24.13'

1185 B FUEL 100LL, JET A TPA-2185(1000) AOE Class I, ARFF Index A

NOTAM FILE INL

RWY 13-31: H7400X150 (ASPH-PFC) S-100, D-125, ST-159,

DT-190 HIRL

RWY 13: MALSR. PAPI(P4L). TCH 52'. Trees.**RWY 31:** MALSR. PAPI(P4L)-GA 3.0' TCH 45'.**RWY 04-22:** H2999X75 (ASPH) S-12.5 0.4% up NE**RWY 04:** Trees.**RWY 22:** Trees.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 04:** TORA-2999 TODA-2999 ASDA-2999 LDA-2999**RWY 13:** TORA-7400 TODA-7400 ASDA-7400 LDA-7400**RWY 22:** TORA-2999 TODA-2999 ASDA-2999 LDA-2999**RWY 31:** TORA-7400 TODA-7400 ASDA-7400 LDA-7400**AIRPORT REMARKS:** Attended daltg hrs. For attendant after hrs call

218-283-2712 or 218-286-5245. Gulls and deer on and in/ov

arpt. PPR for unscheduled air carrier ops with more than 30

passenger seats, call arpt manager or ops 218-283-4461. Air

carrier ops involving acft with more than 30 passengers are not

authorized in excess of 15 minutes before or after scheduled

arrival/departure times without prior coordination with arpt


manager and confirmation that ARFF is avbl prior to landing or

takeoff. ACTIVATE HIRL Rwy 13-31, MALSR Rwy 13 and Rwy 31, PAPI Rwy 13 and Rwy 31-CTAF. Flight

Notification Service (ADCUS) available.

WEATHER DATA SOURCES: ASOS 120.000 (218) 285-2996. HIWAS 111.0 INL.**COMMUNICATIONS:** CTAF/UNICOM 122.8**INTERNATIONAL FALLS RCO** 123.6 (PRINCETON RADIO)

® MINNEAPOLIS CENTER APP/DEP CON 120.9

RADIO AIDS TO NAVIGATION: NOTAM FILE INL.**INTERNATIONAL FALLS (L) VORTACW** 111.0 INL Chan 47 N48°33.95' W93°24.34' at fld. 1180/6E. HIWAS.**RAIZE NDB (H/LOM)** 353 IN N48°28.88' W93°16.68' 310° 7.1 NM to fld.**ILS 109.1** I-ABK Rwy 13 Class IB. Unmonitored**ILS 111.95** I-INL Rwy 31 LOM RAIZE NDB. LOC unusable within 0.2 NM inbound. LOC unusable byd 26° right and left of course.**TWIN CITIES**

H-21, L-14H

IAP

INTERNATIONAL FALLS SPB (Ø9I) 1 E UTC-6(-5DT) N48°36.35' W93°22.25'**TWIN CITIES**

1110 TPA-1710(600) NOTAM FILE PNM

WATERWAY 05-23: 5000X1000 (WATER)**WATERWAY 08-26:** 5000X1000 (WATER)**SEAPLANE REMARKS:** Unattended. Unicom located at Falls Intl arpt. Acft requiring U.S. Customs ctc Princeton AFSS on

123.6 15 minutes prior to arr also call U.S. Customs at 218-283-2541 prior to tcf. Pilots ctc Falls Intl arpt on

122.8 for aeronautical advisory information for the seaplane base. Pilots maintain 500' AGL TPA separation from

tfc at Falls Intl arpt 2 miles SW.

COMMUNICATIONS: CTAF/UNICOM 122.8**INVER GROVE HEIGHTS****WIPLINE SPB** (Ø9Y) 2 SE UTC-6(-5DT) N44°49.00' W93°00.93'**TWIN CITIES**

687 S4 FUEL 100LL, JET A NOTAM FILE PNM

WATERWAY 17-35: 8000X500 (WATER)**WATERWAY 35:** Rgt tcf.**SEAPLANE REMARKS:** Attended continuously. CAUTION required at all times on river for floating debris. River channel marked by buoys.**COMMUNICATIONS:** CTAF 122.9**ISEDOR IVERSON** (See McGREGOR)

JACKSON MUNI (MJQ) 2 N UTC-6(-5DT) N43°39.00' W94°59.19'

OMAHA

1446 B S2 FUEL 100LL, JET A NOTAM FILE MJQ

L-121

RWY 13-31: H3591X75 (ASPH) S-8, D-10 MIRL 0.4% up SE

IAP

RWY 13: REIL. PAPI(P4L). Road.

RWY 31: REIL. PAPI(P4L). Road.

RWY 04-22: 2250X300 (TURF)

RWY 04: P-line.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z+. Fuel avbl 24 hrs with credit card. For svc after hrs call 507-236-6688. Rwy 04-22 CLOSED winter months. Ultralights on and invof arpt. Rwy 04-22 marked with yellow cones. MIRL Rwy 13-31 preset on low ints, to increase ints and ACTIVATE PAPI Rwy 13 and Rwy 31 and REIL Rwy 13 and Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 353 MJQ (507) 847-5810.

COMMUNICATIONS: CTAF/UNICOM 122.8

MINNEAPOLIS CENTER APP/DEP CON 127.75

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)


RADIO AIDS TO NAVIGATION: NOTAM FILE FRM.

FAIRMONT (L) VOR/DME 110.2 FRM Chan 39 N43°38.76'

W94°25.35' 264° 24.6 NM to fld. 1164/7E.

NDB/DME (MHW) 353 MJQ Chan 19(Y) N43°38.82'

W94°59.16' at fld. AWOS-3 DME chan 19(Y) paired with VHF frequency 108.25. NOTAM FILE MJQ.



JOLLY FISHERMAN SPB (See WAUBUN)

KARLSTAD MUNI (23D) 1 W UTC-6(-5DT) N48°34.75' W96°32.52'

TWIN CITIES

1025 NOTAM FILE PNM

RWY 17-35: 2606X159 (TURF) LIRL (NSTD)

RWY 17: Tree.

RWY 35: Road.

AIRPORT REMARKS: Unattended. Rwy 17-35 marked with yellow cones. Twy markers are non-frangible. Rwy 17-35 NSTD LIRL, 400' between lights.

COMMUNICATIONS: CTAF 122.9

LAC QUI PARLE CO (See MADISON)

LAKE BEMIDJI N47°30.47' W94°55.40'

(T) VOR/DME 110.05 IDJ Chan 37 at Bemidji Rgnl 1384/4E. Associated with AWOS-3 (BJL).

LAKE ELMO (See ST PAUL)

LAKESIDE N46°50.63' W92°11.16' NOTAM FILE DLH

GREEN BAY

(H) TACAN LKI (135.4) Chan 11 at Duluth Intl. 1424/5E. Opr Tue-Fri 1300-0400Z+, Mon and Sat 1300-2200Z+. No NOTAM MP Thu 1400-1600Z+.

H-21, L-106

TACAN azimuth unusable:

140°-165° all altitudes and distances.

265°-272° byd 10 NM blo 5,000'

TACAN unusable:

320°-345° byd 20 NM blo 5,500'

CAUTION—Do not select Chan 73 DLH for Chan 11 LKI. Twr 2049' on radial 009 Ch 73 DLH.

LAREW N46°27.40' W94°01.36' NOTAM FILE BRD.

TWIN CITIES

NDB (LOM) 251 BR 232° 5.7 NM to Brainerd Lakes Rgnl. Unmonitored.

LEADERS CLEAR LAKE (See CLEAR LAKE)

LE SUEUR MUNI (12Y) 2 S UTC-6(-5DT) N44°26.25' W93°54.76'

OMAHA

868 B FUEL 100LL TPA-1668(800) NOTAM FILE PNM

L-121, A

RWY 13-31: H3005X75 (ASPH) MIRL


RWY 13: VASI(V2L). Trees. RWY 31: VASI(V2L). Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z±. Self svc fuel avbl 24 hrs with credit card. ACTIVATE MIRL Rwy 13-31 and VASI Rwy 13 and Rwy 31-122.8.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE MKT.

MANKATO (L) VOR/DME 110.8 MKT Chan 45 N44°13.19' W93°54.74' 353° 13.1 NM to fld. 1026/7E.



LINO LAKES

SURFSIDE SPB (8Y4) 2 S UTC-6(-5DT) N45°09.00' W93°07.01'

TWIN CITIES

880 S4 FUEL 100LL TPA-1480(600) NOTAM FILE PNM

WATERWAY NE-SW: 6500X1000 (WATER)

WATERWAY N-S: 5500X1000 (WATER)

SEAPLANE REMARKS: Attended May-Oct dawn-dusk, unattended Nov-Apr. S dep make left turnout. Plan apch over Marshan or Baldwin Lakes. 500' twr 2 miles E right of dep path.

COMMUNICATIONS: CTAF 122.9

LITCHFIELD MUNI (LJF) 2 SE UTC-6(-5DT) N45°05.83' W94°30.44'

TWIN CITIES

1140 B FUEL 100LL, JET A NOTAM FILE LJF

L-121, 14H

RWY 13-31: H4002X100 (ASPH) MIRL

RWY 13: REIL. PAPI(P4L)-GA 3.0° TCH 42'.

RWY 31: REIL. PAPI(P4L)-GA 3.0° TCH 42'.

AIRPORT REMARKS: Unattended. Self svc fuel avbl 24 hrs. MIRL Rwy 13-31 preset on low ints, to increase ints and ACTIVATE PAPI Rwy 13 and Rwy 31 and REIL Rwy 13 and Rwy 31-CTAF.

WEATHER DATA SOURCES: AWOS-3 109.0 DWN (320) 693-6456.


COMMUNICATIONS: CTAF 122.9

DARWIN RCO 122.1R 109.0T (PRINCETON RADIO)

MINNEAPOLIS CENTER APP/DEP CON 125.5.

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

DARWIN (L) VORTAC 109.0 DWN Chan 27 N45°05.25' W94°27.23' 277° 2.3 NM to fld. 1130/7E. AWOS-3.



LITTLE FALLS/MORRISON CO, CHARLES A LINDBERGH FLD (LXL) 2 S UTC-6(-5DT)

TWIN CITIES

L-14H

IAP

N45°56.97' W94°20.82'

1123 B FUEL 100LL NOTAM FILE LXL

RWY 13-31: H4011X77 (ASPH) S-22, D-42 MIRL

RWY 13: REIL. PAPI(P4R)—GA 3.0° TCH 25'.

RWY 31: REIL. PAPI(P4L)—GA 3.0° TCH 25'.

RWY 18-36: 2922X170 (TURF) 0.3% up N

RWY 18: Thld dspcd 203'. Trees.

RWY 36: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z±. Fuel avbl 24 hrs with credit card. Rwy 18-36 CLOSED winter months. Avoid mink ranch dep Rwy 36; ranch is ½ mile NE of rwy. Additional 500' off NW end Rwy 13-31 marked unusable. Rwy 18-36 and dspcd thld marked with yellow cones. ACTIVATE MIRL Rwy 13-31, REIL Rwy 13 and Rwy 31 and PAPI Rwy 13 and Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 359 LXL (320) 632-6791.**COMMUNICATIONS:** CTAF/UNICOM 122.8⑧ **MINNEAPOLIS CENTER APP/DEP CON 118.05**


GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE BRD.**BRAINERD (H) VORTACW** 116.9 BRD Chan 116 N46°20.89'

W94°01.55' 206° 27.4 NM to fld. 1260/3E.

NDB (MHW) 359 LXL N45°57.01' W94°20.50' at fld.

AWOS-3. NOTAM FILE LXL. Unmonitored.

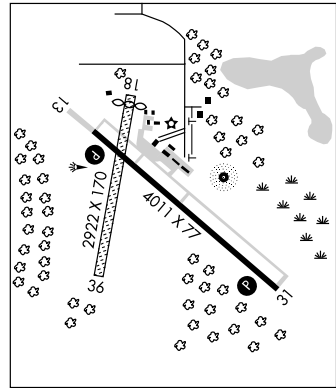**LITTLEFORK MUNI/HANOVER** (13Y) 2 NW UTC-6(-5DT) N48°25.00' W93°35.18'

TWIN CITIES

1145 NOTAM FILE PNM

RWY 09-27: 3000X150 (TURF)

RWY 09: Trees.

RWY 27: Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED winter months. Ultralight t/c on and invof arpt. Antenna +25', 500' SE of rwy, marked and lgtd. Rwy 09-27 marked with yellow cones.

COMMUNICATIONS: CTAF 122.9**LONG PRAIRIE****TODD FLD** (14Y) 4 S UTC-6(-5DT) N45°53.90' W94°52.43'

TWIN CITIES

L-14H

IAP

1333 B FUEL 100LL NOTAM FILE 14Y

RWY 16-34: H3000X75 (ASPH) MIRL

RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 23'.

RWY 34: REIL. PAPI(P4L)—GA 3.0° TCH 23'.

AIRPORT REMARKS: Unattended. For fuel call

320-732-3827/766-4717. Ultralights on and invof arpt.

ACTIVATE MIRL Rwy 16-34, PAPI Rwy 16 and Rwy 34 and REIL

Rwy 16 and Rwy 34—CTAF.


WEATHER DATA SOURCES: AWOS-3 118.650 (320) 732-3508.**COMMUNICATIONS:** CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 126.1

RADIO AIDS TO NAVIGATION: NOTAM FILE AXN.**ALEXANDRIA (L) VORW/DME** 112.8 AXN Chan 75 N45°57.50'

W95°13.96' 096° 15.5 NM to fld.

1367/7E. HIWAS.

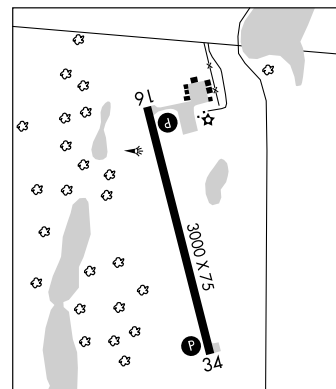

LONGVILLE MUNI (XVG) 1 NE UTC-6(-5DT) N46°59.40' W94°12.22'

TWIN CITIES

1334 B FUEL 100LL NOTAM FILE XVG

L-14H

RWY 13-31: H3560X75 (ASPH) S-9, D-14 MIRL

IAP

RWY 13: PAPI(P4L)—GA 4.0° TCH 20'. Thld dsplcd 450'. Trees.

RWY 31: PAPI(P4L)—GA 3.0° TCH 20'. Trees.

AIRPORT REMARKS: Unattended. Self serve fuel avbl 24 hrs. Ultralights on and invof arpt. Deer and birds on and invof arpt. ACTIVATE MIRL Rwy 13-31, PAPI Rwy 13 and Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 392 XVG (218) 363-3347.

COMMUNICATIONS: CTAF 122.9


Ⓡ MINNEAPOLIS CENTER APP/DEP CON 118.05

RADIO AIDS TO NAVIGATION: NOTAM FILE GPZ.

GRAND RAPIDS (L) VORW/DME 111.4 GPZ Chan 51 N47°09.82' W93°29.31' 245° 31.1 NM to fld. 1400/6E.

NDB(MHW) 392 XVG N46°59.66' W94°12.39' at fld.

AWOS-3. NOTAM FILE XVG.



LUVERNE

QUENTIN AANENSON FLD (LYV) 2 S UTC-6(-5DT) N43°37.01' W96°13.06'

OMAHA

1435 B FUEL 100LL NOTAM FILE LYV

L-12I

RWY 18-36: H4200X75 (ASPH) S-17, D-23 MIRL 0.3% up N.

IAP

RWY 18: REIL. PAPI(P4L)—GA 3.0° TCH 28'. P-line.

RWY 36: REIL. PAPI(P4L)—GA 3.0° TCH 28'. Road.

AIRPORT REMARKS: Attended Mon-Fri 1300-2300Z±. 24 hr self svc credit fuel avbl. Rwy lighting operates continuously from dusk-dawn on lowest setting. Increase via CTAF. ACTIVATE PAPI Rwy 18 and Rwy 36 and REIL Rwy 18 and Rwy 36, MIRL Rwy 18-36—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.825 (507) 283-5027.

COMMUNICATIONS: CTAF/UNICOM 122.7


Ⓡ SIOUX FALLS APP/DEP CON 125.8 (1100-0600Z±) other times etc.

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 132.05

RADIO AIDS TO NAVIGATION: NOTAM FILE FSD.

SIOUX FALLS (H) VORTACW 115.0 FSD Chan 97 N43°38.97'

W96°46.87'MN 085° 24.6 NM to fld. 1570/9E. HIWAS



MADISON

LAC QUI PARLE CO (DXX) 2 SE UTC-6(-5DT) N44°59.19' W96°10.67'

TWIN CITIES

1082 B S4 FUEL 100LL NOTAM FILE DXX

L-12I, 14H

RWY 13-31: H3301X75 (ASPH) MIRL

IAP

RWY 13: PAPI(P4L). RWY 31: PAPI(P4L).

RWY 08-26: 3033X135 (TURF)

AIRPORT REMARKS: Attended Mon-Sat 1400-0100Z±. Unattended Sun; for svc call 320-598-7966. Self svc fuel. For airframe and power plant repairs call 320-598-3467. Rwy 08-26 not plowed winter months. Rwy 08-26 marked with yellow cones. ACTIVATE MIRL Rwy 13-31 and PAPI Rwy 13 and Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 341 DXX (320) 598-3863

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 122.3 (PRINCETON RADIO)

MINNEAPOLIS CENTER APP/DEP CON 128.5

RADIO AIDS TO NAVIGATION: NOTAM FILE MVE.

MONTEVIDEO (T) VORW/DME 111.6 MVE Chan 53 N44°58.36' W95°42.72' 268° 19.9 NM to fld. 1034/5E. Unmonitored.

DAWSON-MADISON NDB (MHW) 341 DXX N44°59.05' W96°10.75' at fld. AWOS-3. NOTAM FILE DXX.

MAHNOMEN CO (3N8) 3 SSE UTC-6(-5DT) N47°15.62' W95°55.68'

TWIN CITIES

1244 B NOTAM FILE PNM

RWY 17-35: 3210X75 (ASPH) MIRL

RWY 35: REIL.

RWY 09-27: 2720X120 (TURF)

AIRPORT REMARKS: Ultralight t/c on and invof arpt. Attended dusk-dawn. MIRL Rwy 17-35 on low ints, incr ints and ACTIVATE REIL Rwy 17 and Rwy 35—CTAF. Rwy 09-27 not plowed winter months.

COMMUNICATIONS: CTAF 122.9**MAL'S SERPENT LAKE SPB** (See DEERWOOD)**MANKATO RGNL** (MKT) 5 NE UTC-6(-5DT) N44°13.37' W93°55.16'

OMAHA

1021 B S4 FUEL 100LL, JET A OX 2 NOTAM FILE MKT

H-21, L-121, A

RWY 15-33: H6600X100 (CONC-GRVD) S-40, D-60, DT-100 MIRL

IAP

RWY 15: REIL. PAPI(P4R)—GA 3.0° TCH 48'.

RWY 33: MALSR. PAPI(P4R)—GA 3.0° TCH 48'.

RWY 04-22: H3999X75 (ASPH) S-18, D-25 MIRL

0.3% up NE

RWY 04: REIL. PAPI(P4L)—GA 3.0° TCH 39'.

RWY 22: REIL. PAPI(P4L)—GA 3.0° TCH 26'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1300-0200Z†, Sat-Sun 1400-0100Z†. For fuel and svc after hrs call 507-469-0228. Deer on and invof arpt. Migratory waterfowl on and invof arpt. ACTIVATE MIRL Rwy 04-22, PAPI and REIL Rwy 04 and Rwy 22, MIRL Rwy 15-33, PAPI and REIL Rwy 15, PAPI and MALSR Rwy 33—CTAF.

WEATHER DATA SOURCES: AWOS-3 110.8 MKT (507) 625-3726.**COMMUNICATIONS:** CTAF/UNICOM 122.725

RCO 122.1R 110.8T (PRINCETON RADIO)

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 135.0

AIRSPACE: CLASS E svc Mon-Fri 1100-0530Z†, Sat 1300-1600Z† and 1900-2200Z†, Sun 2130-0530Z† other times CLASS G.


RADIO AIDS TO NAVIGATION: NOTAM FILE MKT.

(L) VOR/DME 110.8 MKT Chan 45 N44°13.19' W93°54.74' at fld. 1026/7E. AWOS-3.

DME portion unusable 325°-150° beyond 16 NM.

ILS 108.7 I-MKT Rwy 33. ILS unmonitored.

COPTER ILS 108.7 I-MKT Rwy 33. ILS unmonitored.

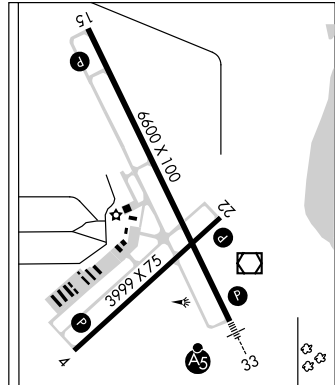**MAPLE LAKE MUNI** (MGG) 1 NE UTC-6(-5DT) N45°14.16' W93°59.14'

TWIN CITIES

1028 B S2 FUEL 100LL NOTAM FILE MGG

L-14H, A

RWY 10-28: H2796X60 (ASPH) LIRL (NSTD)

IAP, AD

RWY 10: Thld displcd 100'. Tree. RWY 28: Hill.

AIRPORT REMARKS: Attended dailgt hrs. Arpt not attended Thanksgiving, Christmas, New Years and Easter. Rwy 10-28 NSTD LIRL, 400' spacing between lights. Ultralights on and invof arpt. Migratory waterfowl on and invof arpt.

Multiple cracks with grass growing in them.

WEATHER DATA SOURCES: AWOS-3 128.325 (320) 963-3300.**COMMUNICATIONS:** CTAF/UNICOM 122.8

Ⓡ MINNEAPOLIS APP/DEP CON 126.5

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

DARWIN (L) VORTAC 109.0 DWN Chan 27 N45°05.25' W94°27.23' 059° 21.8 NM to fld. 1130/7E.

MARSHALL**SOUTHWEST MINNESOTA RGNL MARSHALL/RYAN FLD** (MML) 1 W UTC-6(-5DT)OMAHA
H-2H, L-12I
IAP

N44°27.10' W95°49.47'

1183 B S4 FUEL 100LL, JET A NOTAM FILE MML

RWY 12-30: H7220X100 (ASPH) S-30, D-45 HIRL

RWY 12: MALSR. PAPI(P4L)—GA 3.0° TCH 50'.

RWY 30: REIL. PAPI(P4L)—GA 3.0° TCH 32'. Pole.

RWY 02-20: H4000X75 (ASPH) MIRL

RWY 02: REIL. PAPI(P4L)—GA 3.0° TCH 32'.

RWY 20: REIL. PAPI(P4L)—GA 3.0° TCH 32'. Road.

AIRPORT REMARKS: Attended Mon-Thu 1400-0000Z†, Fri

1400-2300Z†. For svc after hrs call 507-532-3164. Rwy 12
MALSR OTS indef. ACTIVATE MIRL Rwy 02-20, HIRL Rwy 12-30,
PAPI Rwy 02, Rwy 20, Rwy 12 and Rwy 30, REIL Rwy 02, Rwy 20,
and Rwy 30, MALSR Rwy 12—CTAF.

WEATHER DATA SOURCES: AWOS-3 111.0 MML (507) 532-5269.

COMMUNICATIONS: CTAF/UNICOM 122.8

MARSHALL RCO 122.35 (PRINCETON RADIO)

MINNEAPOLIS CENTER APP/DEP CON 127.1


GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE MML.

MARSHALL (T) VORW/DME 111.0 MML Chan 47 N44°26.90'
W95°49.49' at fld. 1180/5E. AWOS-3. Unmonitored.

GARNO NDB (LOM) 253 GB N44°30.11' W95°54.66' 124° 4.8 NM to fld.

ILS 109.7 I-GBY Rwy 12. LOM GARNO NDB.

**MARSHALL** N44°26.91' W95°49.90' NOTAM FILE MML.OMAHA
L-12I

(T) VORW/DME 111.0 MML Chan 47 at Southwest Minnesota Rgnl Marshall/Ryan Fld

1180/5E AWOS-3 Unmonitored.

RCO 122.35 (PRINCETON RADIO)

McGREGOR**ISIDOR IVERSON** (HZX) 1 N UTC-6(-5DT) N46°37.13' W93°18.59'TWIN CITIES
L-14H
IAP

1228 B FUEL 100LL, MOGAS NOTAM FILE HZX

RWY 14-32: H3400X75 (ASPH) MIRL

RWY 14: VASI (V2L) RWY 32: VASI (V2R)

AIRPORT REMARKS: Unattended. Fuel 24hr credit card fuel avbl. Ultralights on and invof arpt. ACTIVATE MIRL Rwy
14-32 and VASI Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.575 (218) 768-2593.

COMMUNICATIONS: CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 127.9

RADIO AIDS TO NAVIGATION: NOTAM FILE DLH.

DULUTH (H) VORTACW 112.6 DLH Chan 73 N46°48.13' W92°12.17' 252° 47 NM to fld. 1428/5E.

MILACA MUNI (18Y) 2 NE UTC-6(-5DT) N45°46.35' W93°37.93'

TWIN CITIES

1100 B S3 FUEL 100LL NOTAM FILE PNM

RWY 16-34: 2900X150 (TURF) LIRL (NSTD)


RWY 16: Trees. RWY 34: Trees.

AIRPORT REMARKS: Unattended. For svc call 320-938-2381. Ultralight traffic on and invof arpt. Rwy 16-34 NSTD
LIRL, spacing. Rwy 34 marked with yellow cones.

COMMUNICATIONS: CTAF 122.9

MINNEAPOLIS**AIRLAKE** (LVN) 2 SE UTC-6(-5DT) N44°37.67' W93°13.69'960 B S4 **FUEL** 100LL, JET A OX 4 TPA—1760(800) NOTAM FILE LVN**RWY 12-30:** H4098X75 (ASPH) S-30, D-80, ST-102 HIRL**RWY 12:** REIL. VASI(V4L)—GA 3.25° TCH 37'. Tree. Rgt tfc.**RWY 30:** MALSR. PAPI(P4R)—GA 3.0° TCH 29'. Thld displcd 392'. Hill.

AIRPORT REMARKS: Attended Mon-Sat 1300-2300Z†, Sun 1400-2200Z†. Maintenance supervisor telephone 612-469-4040 Mon-Fri 1400-2230Z†. Self service fuel avbl 24 hrs with credit card. Birds on and infov arpt. Hangers 400' N from centerline in primary surface. Ultralight ops not permitted. ACTIVATE HIRL Rwy 12-30, REIL and VASI Rwy 12, MALSR Rwy 30 and PAPI Rwy 30—CTAF.

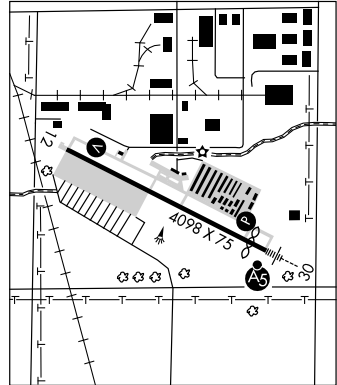WEATHER DATA SOURCES: AWOS-3 118.0 (952) 469-5850.**COMMUNICATIONS:** CTAF/UNICOM 123.0**FARMINGTON RCO** 122.1R 115.7T (PRINCETON RADIO)① **MINNEAPOLIS APP/DEP CON** 134.7**MINNEAPOLIS CLNC DEL** 118.95**RADIO AIDS TO NAVIGATION:** NOTAM FILE PNM.**FARMINGTON (H) VORTAC** 115.7 FGT Chan 104 N44°37.86' W93°10.92' 259° 2 NM to fld. 972/6E.**ILS** 108.9 I-LVN Rwy 30. Unmonitored.**TWIN CITIES**

L-12J, 14I, A


IAP

ANOKA CO-BLAINE (JANES FLD) (ANE) 10 N UTC-6(-5DT)

N45°08.69' W93°12.61'

912 B S4 **FUEL** 100LL, JET A TPA—1912(1000) NOTAM FILE ANE**RWY 09-27:** H5000X100 (ASPH) S-23, D-60 HIRL**RWY 09:** REIL. PAPI(P4L)—GA 3.0° TCH 25'. Tree.**RWY 27:** MALSR. PAPI(P4L)—GA 3.0° TCH 50'. Trees.**RWY 18-36:** H4855X100 (ASPH) S-23, D-60 MIRL**RWY 18:** REIL. VASI(V4L)—GA 3.0° TCH 50'. Tree.**RWY 36:** REIL. VASI(V4L)—GA 3.0° TCH 50'.

AIRPORT REMARKS: Attended 1300-0400Z†. Deer and waterfowl on and infov arpt. Rwy 09-27 trees +20' north side in primary surface. Noise abatement procedures in effect. Ctc arpt manager for details at 612-725-6327. ACTIVATE HIRL Rwy 09-27, MIRL Rwy 18-36, REIL Rwy 09, Rwy 18, and Rwy 36, VASI Rwy 18 and Rwy 36 PAPI Rwy 09 and Rwy 27 and MALSR Rwy 27—CTAF.

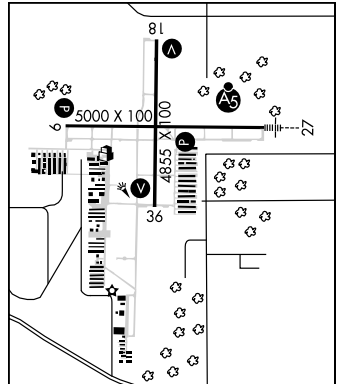WEATHER DATA SOURCES: AWOS-3 120.625 (763) 780-9025. LAWRS.**COMMUNICATIONS:** CTAF 132.4 ATIS 120.625 UNICOM 122.95**RCO** 122.55 (PRINCETON RADIO)① **MINNEAPOLIS APP/DEP CON** 126.5**MINNEAPOLIS CLNC DEL** 121.85**TOWER** 132.4 (Oct-Apr 1300-0300Z†, May-Sep 1300-0400Z†)**GND CON** 121.85 **CLNC DEL** 121.3**AIRSPACE:** CLASS D svc Oct-Apr 1300-0300Z†, May-Sep 1300-0400Z†, other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE PNM.**GOPHER (H) VORTACW** 117.3 GEP Chan 120 N45°08.74' W93°22.39' 084° 6.9 NM to fld. 877/6E. HIWAS.**ILS/DME** 111.15 I-ANE Chan 48(Y) Rwy 27.**COMM/NAV/WEATHER REMARKS:** Minneapolis apch provides CLNC DEL on 121.85 when Anoka Co-Blaine twr clsd.**TWIN CITIES**

H-2I, L-12J, 14I, A

IAP, AD

CRYSTAL (MIC) 8 NW UTC-6(-5DT) N45°03.72' W93°21.24'

TWIN CITIES

869 B S4 **FUEL** 100LL, JET A, MOGAS TPA-1869(1000) NOTAM FILE MIC

L-12J, 14J, A

RWY 14R-32L: H3266X75 (ASPH) S-13, D-25

IAP, AD

RWY 14R: Tree. **RWY 32L:** Tree.

RWY 14L-32R: H3263X75 (ASPH) S-13, D-25 MIRL

RWY 14L: REIL. VASI(V4L)—GA 4.0° TCH 27'. Tree.

RWY 32R: REIL. VASI(V4L)—GA 3.5° TCH 34'. Trees.

RWY 06L-24R: H2499X75 (ASPH) S-12.5, D-25 MIRL

RWY 06L: VASI(V4L)—GA 4.0° TCH 27'. Thld dsplcd 390'. Tree.

RWY 24R: VASI(V4L)—GA 3.5° TCH 29'. Thld dsplcd 389'. Tree.

RWY 06R-24L: 2122X150 (TURF)

RWY 06R: Tree. **RWY 24L:** Tree.

AIRPORT REMARKS: Attended Mon-Fri 1300-0300Z†, Sat-Sun 1300-0100Z†. Fuel avbl 24 hrs with credit card. Rwy 14R-32L CLOSED to fixed wing acft 1/2 hour after sunset to ½ hour prior to sunrise. When taxiing invof Rwy 32L runup pad, visibility from twr obscured by building. Deer and waterfowl on and invof arpt. Ultralight ops prohibited. Rwy 06R-24L marked with yellow cones. Rwy 06R-24L turf rwy rough condition. CLOSED Nov-Apr. When ATCT clsd snow removal operators monitor 120.7. Rwy 14L-32R 500' overrun added to each end. Not avbl for tkfs. When twr closed ACTIVATE MIRL Rwy 14L-32R and Rwy 06L-24R, REIL Rwy 14L and Rwy 32R—CTAF.

WEATHER DATA SOURCES: ASOS (763) 531-2343.

COMMUNICATIONS: CTAF 120.7 ATIS 124.475 UNICOM 122.95

MINNEAPOLIS APP/DEP CON 126.5

TOWER 120.7 (Oct 1-Apr 30 1300-0300Z†, May 1-Sep 30 1300-0400Z†) **GND CON** 121.6

CLNC DEL 121.6 (24 hours)


AIRSPACE: CLASS D svc Oct 1-Apr 30 1300-0300Z†, May 1-Sep 30 1300-0400Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

GOPHER (H) VORTACW 117.3 GEP Chan 120 N45°08.74' W93°22.39' 165° 5.1 NM to fld. 877/6E.

HIWAS.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not available at tower.



FLYING CLOUD (FCM) 11 SW UTC-6(-5DT) N44°49.65' W93°27.51'

TWIN CITIES

906 B S4 FUEL 100, 100LL, JET A OX 3, 4 TPA-1906(1000) NOTAM FILE FCM H-21, L-121, 14H, A
RWY 10R-28L: H5000X100 (ASPH) S-30 HIRL IAP, AD

RWY 10R: MALSR. PAPI(P4L)—GA 3.0° TCH 42'. Rgt tfc.

RWY 28L: REIL. PAPI(P4L)—GA 3.0° TCH 44'. Bldg.

RWY 10L-28R: H3900X75 (ASPH) S-12.5 MIRL

RWY 10L: PAPI(P4L)—GA 3.0°, TCH 39'.

RWY 28R: PAPI(P4L)—GA 3.0° TCH 38'. Road. Rgt tfc.

RWY 18-36: H2691X75 (ASPH) S-12.5 MIRL

RWY 18: REIL. VASI(V4L)—GA 3.0° TCH 37'. Tree.

RWY 36: REIL. VASI(V4L)—GA 3.0° TCH 31'. Road.

AIRPORT REMARKS: Attended 1300-0400Z†. Self serve fuel available 24 hrs. Rwy 10L-28R CLOSED when twr clsd. Arpt CLOSED to jets not meeting FAR 36, jet training and acft weighting more than 60,000 lbs gross weight. Maintenance run-ups are prohibited between 0400-1300Z†. Ultralight ops prohibited. Deer and waterfowl on and in/ov arpt. When twr clsd snow removal operators monitor 119.15. Rwy 10R and Rwy 28R rgt tfc during twr hrs only. For noise abatement procedures call 612-725-6327. Rwy 18-36 turn-off A, B, D1, D2, E1, E2, lights OTS indef. When twr clsd ACTIVATE MIRL Rwy 18-36 and HIRL Rwy 10R-28L, MALSR Rwy 10R, REIL Rwy 28L, Rwy 18 and Rwy 36, VASI Rwy 18, PAPI Rwy 10L, Rwy 10R, Rwy 28L and Rwy 28R—frequency 119.15. PAPI Rwy 10L, Rwy 28R, and MIRL Rwy 10L-28R activated only when Rwy 10R-28L clsd. Rwy 36 VASI on continuously.

WEATHER DATA SOURCES: ASOS (952) 941-4156.

COMMUNICATIONS: CTAF 119.15 ATIS 124.9

UNICOM 122.95

® MINNEAPOLIS APP/DEP CON 134.7

MINNEAPOLIS CLNC DEL 121.7 (When twr closed)

TOWER 119.15 125.2 (Apr-Oct 1300-0400Z†, Nov-Mar 1300-0300Z†) **GND CON** 121.7 **CLNC DEL** 121.7


AIRSPACE: CLASS D svc Apr-Oct 1300-0400Z† Nov-Mar 1300-0300Z† other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE FCM.

(L) VOR/DME 117.7 FCM Chan 124 N44°49.52' W93°26.56' at fld. 902/1E.

ILS 109.7 I-FCM RWY 10R. GS unusable byd 5 degrees right of course. GS unmonitored 0300-1200Z†.

COPTER ILS 109.7 I-FCM Rwy 10R.

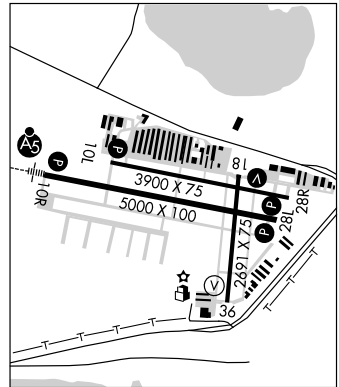

MINNEAPOLIS-ST PAUL INTL /WOLD-CHAMBERLAIN

(MSP) 6 SW UTC-6(-5DT)

TWIN CITIES

N44°52.92' W93°13.31'

H-21, L-121, 141, A

841 B S4 FUEL 100LL JET A OX 1, 2, 3, 4 LRA Class I, ARFF Index E NOTAM FILE MSP IAP, AD

RWY 04-22: H11006X150 (CONC-GRVD) S-100, D-200, ST-175, DT-400, DDT-850 HIRL

RWY 04: MALS. PAPI(P4L)—GA 3.0° TCH 75'. Thld dsplcd 1550'. Tree.

RWY 22: MALS. PAPI(P4L)—GA 3.0° TCH 42'. Thld dsplcd 988'. Tree.

RWY 12R-30L: H10000X200 (CONC-GRVD) S-100, D-200, ST-175, DT-400, DDT-850 HIRL (NSTD) CL
RWY 12R: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 65'. Tree. 0.3% down.

RWY 30L: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 73'. Tree.

RWY 12L-30R: H8200X150 (ASPH-CONC-GRVD) S-100, D-200, ST-175, DT-400, DDT-850 HIRL CL

RWY 12L: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 75'. Tree. 0.3% down.

RWY 30R: REIL. PAPI(P4L)—GA 3.0° TCH 73'. Thld dsplcd 200'. Tree.

RWY 17-35: H8000X150 (CONC-GRVD) S-100, D-200, ST-175, DT-400, DDT-850 HIRL CL

RWY 17: REIL. PAPI(P4R)—GA 3.0° TCH 60'. Tree.

RWY 35: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 71'.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 22	Twy K	8550
RWY 30L	Twy A9/W9	8150

RUNWAY DECLARED DISTANCE INFORMATION

RWY 12L: TORA-8200 TODA-8200 ASDA-7620 LDA-7620

RWY 30R: TORA-8200 TODA-8200 ASDA-8200 LDA-8000

ARRESTING GEAR/SYSTEM

RWY 12R: EMAS

AIRPORT REMARKS: Attended continuously. Birds on and in/ov arpt. Training flights prohibited. General aviation flights must terminate at the FBO or US Customs unless approved by Airport Manager. All unscheduled acft at terminal 2—Humphrey are required to ctc terminal 2 gate ctl on 122.95 or call 612-726-5742 prior to arrival. For noise abatement procedures call 612-726-9411. No stage 1 Category Civil acft, nighttime hrs are 0430-1200Z+. Complex geometry at Rwy 04 approach end. Rwy 04 departures check compass to verify correct rwy heading. ASDE-X surveillance system in use. Pilots should operate transponders with mode C on all twys and rwys. Rwy 04 runway visual range avbl touchdown, rollout. Rwy 22 runway visual range avbl touchdown, rollout. Rwy 12R runway visual range avbl touchdown, midfield, rollout. Rwy 30L runway visual range avbl touchdown, midfield, rollout. Rwy 12L runway visual range avbl touchdown, midfield, rollout. Rwy 30R runway visual range avbl touchdown, midfield, rollout. Rwy 17 runway visual range avbl touchdown, midfield, rollout. Rwy 35 runway visual range avbl touchdown, midfield, rollout. Vehicles parked along south end of Twy S. Ldg fee. Flight Notification Service (ADCUS) avbl. NOTE: See Special Notices - Minneapolis, MN Class B Airspace, Intersection Departures During Period Of Darkness, Continuous Power Facilities.

WEATHER DATA SOURCES: ASOS (612) 725-0939. LLWAS. TDWR.**COMMUNICATIONS:** D-ATIS ARR 135.35 (612) 726-9240 D-ATIS DEP 120.8 UNICOM 122.95

RCO 122.3 (PRINCETON RADIO)

- Ⓡ APP CON 119.3 (N or E of arrival rwy and Rwy 17) 126.95 (S or W of arrival rwy and Rws 04, 12R and 30L) 118.72 (Rwy 35)

TOWER 126.7 (Rws 12R-30L and 04-22) 123.95 (Rwy 12L-30R) 123.675 (Rwy 17-35)

GND CON 121.9 (S) 121.8 (N) 127.925 (W) CLNC DEL 133.2 GND METERING 133.57

- Ⓡ DEP CON 125.75 (N or W of arrival rwy) 124.7 (S or E of arrival rwy) 132.975

AIRSPACE: CLASS B: See VFR Terminal Area Chart.**RADIO AIDS TO NAVIGATION:** NOTAM FILE MSP.

(H) VORW/DME 115.3 MSP Chan 100 N44°53.79' W93°14.19' 142° 1.1 NM to fld. 831/2E. VOR portion unusable 260°-270° blo 4000'.

ILS/DME 110.7 I-INN Chan 44 Rwy 30R. Class IE.

ILS/DME 110.3 I-MSP Chan 40 Rwy 30L. Class IE.

ILS 109.3 I-APL Rwy 04 LOC only. LOC unusable byd 25° L and R of course.


ILS/DME 110.3 I-HKZ Chan 40 Rwy 12R. Class IIIE. DME unusable byd 25° right of course.

ILS/DME 110.7 I-PJL Chan 44 Rwy 12L. Class IIIE. DME also serves Rwy 30R. DME unusable byd 20° left of course.

ILS/DME 110.95 I-BMA Chan 46(Y) Rwy 35. Class IIIE.

ILS/DME 110.95 I-TJZ Chan 46(Y) Rwy 17. Class I. LOC only.

ILS 110.5 I-SIJ Rwy 22. LOC only.

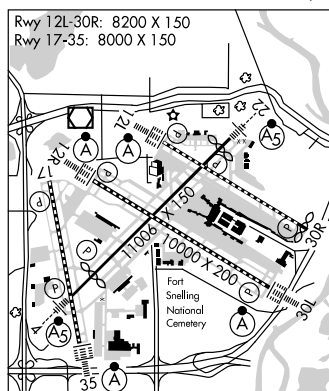

MONTEVIDEO-CHIPPEWA CO (MVE) 2 N UTC-6(-5DT) N44°58.14' W95°42.62'

TWIN CITIES

1034 B FUEL 100LL NOTAM FILE MVE

L-121, 14H

RWY 14-32: H4000X75 (ASPH) S-14, D-18 MRL 0.4% up NW

IAP

RWY 14: REIL. PAPI(P4L).

RWY 32: REIL. PAPI (P4L).

RWY 03-21: 2330X165 (TURF)

RWY 03: Pole.

AIRPORT REMARKS: Attended Mon-Sat 1400-2230Z†, Sun

1900-2230Z†. Ultralights on and in/ov arpt. Rwy 03-21 not plowed winter months. Badger and gopher holes. Rwy 03-21 thlds and edges marked with yellow cones. Rwy 14-32 non frangible cages around REILS. ACTIVATE MRL Rwy 14-32, REIL and PAPI Rwy 14 and REIL and PAPI Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 111.6 MVE (320) 269-5830.**COMMUNICATIONS:** CTAF/UNICOM 122.8


RCO 122.45 (PRINCETON RADIO)

MINNEAPOLIS CENTER APP/DEP CON 125.5

RADIO AIDS TO NAVIGATION: NOTAM FILE MVE.

(T) VORW/DME 111.6 MVE Chan 53 N44°58.36'

W95°42.72' at fld. 1034/5E. AWOS-3. Unmonitored.

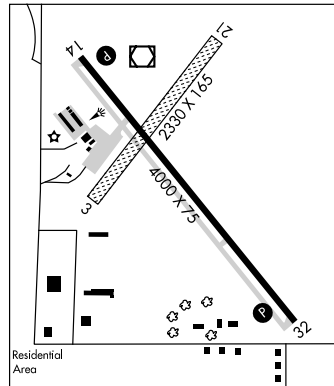**MONTZ** N43°34.43' W94°19.08' NOTAM FILE FRM.

OMAHA

NDB (LOM) 420 FQ 311° 6.0 NM to Fairmont Muni.

MOORHEAD MUNI (JKJ) 4 SE UTC-6(-5DT) N46°50.36' W96°39.84'

TWIN CITIES

918 B S4 FUEL 100LL, JET A TPA-1718 (800) NOTAM FILE JKJ

L-14G

RWY 12-30: H4300X75 (ASPH) MRL

IAP

RWY 12: REIL. PAPI(P4L). RWY 30: REIL. PAPI(P4L).

AIRPORT REMARKS: Attended 1400-2300Z†. For svc after hrs call 218-287-1400. Arpt underlies Fargo TRSA, Hector Intl Class D Airspace 3 miles NW of arpt. Noise abatement procedures in effect, ctc arpt manager 218-287-1400. ACTIVATE MRL Rwy 12-30, REIL Rwy 12 and Rwy 30 and PAPI Rwy 12 and Rwy 30—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.0 (218) 287-5049.**COMMUNICATIONS:** CTAF/UNICOM 123.0


FARGO APP/DEP CON 120.4 (1200-0500Z†)

® MINNEAPOLIS CENTER APP/DEP CON 127.35 (0500-1200Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE FAR.

FARGO (H) VORTACW 116.2 FAR Chan 100 N46°45.20'

W96°51.08' 047° 9.3 NM to fld. 910/9E. HIWAS.



MOOSE LAKE CARLTON CO (MZH) 3 SW UTC-6(-5DT) N46°25.12' W92°48.29'

GREEN BAY

1076 B FUEL 100LL NOTAM FILE MZH

L-141

RWY 04-22: H3200X75 (ASPH) MIRL

IAP

RWY 04: REIL. RWY 22: REIL.

AIRPORT REMARKS: Unattended. Self svc fuel available 24 hrs with credit card. Ultralights on and invof arpt. MIRL Rwy 04-22 preset to low ints, to increase ints and ACTIVATE REIL Rwy 04 and REIL Rwy 22—CTAF.

WEATHER DATA SOURCES: AWOS-3 362 MZH (218) 485-5199.**COMMUNICATIONS:** CTAF 122.9

① DULUTH APP/DEP CON 125.45 (1200-0500Z‡)


① MINNEAPOLIS CENTER APP/DEP CON 127.9 (0500-1200Z‡)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLH.

DULUTH (H) VORTACW 112.6 DLH Chan 73 N46°48.13' W92°12.17' 222° 33.9 NM to fld. 1428/5E.

NDB (MHW) 362 MZH N46°24.99' W92°48.29' at fld.

AWOS-3. NOTAM FILE MZH.

**MORA MUNI** (JMR) 1 NE UTC-6(-5DT) N45°53.16' W93°16.31'

TWIN CITIES

1012 B FUEL 100LL, JET A NOTAM FILE JMR

L-141

RWY 17-35: H3998X75 (ASPH) MIRL

IAP

RWY 17: REIL. PAPI(P4L)—GA 3.0° TCH 41'. Trees.

RWY 35: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Trees.

RWY 11-29: 2506X200 (TURF)

RWY 11: Trees. RWY 29: Trees.

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs with credit card. Rwy 11-29 CLOSED indef. Ultralights on and invof arpt. Waterfowl invof arpt. Rwy 11 marked with yellow cones. Rwy 29 marked with yellow cones. ACTIVATE MIRL Rwy 17-35, REIL Rwy 17 and Rwy 35, and PAPI Rwy 17 and Rwy 35—CTAF.

WEATHER DATA SOURCES: AWOS-3 327 JMR (320) 679-1629.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.4 (PRINCETON RADIO)


① MINNEAPOLIS CENTER APP/DEP CON 121.05

RADIO AIDS TO NAVIGATION: NOTAM FILE STC.

ST CLOUD (T) VORW/DME 112.1 STC Chan 58 N45°32.96' W94°03.52' 055° 38.9 NM to fld. 1023/3E.
VOR unmonitored.

NDB (MHW) 327 JMR N45°53.42' W93°16.15' at fld.


AWOS-3. NOTAM FILE JMR.

**MOREY'S** (See MOTLEY)

MORRIS MUNI—CHARLIE SCHMIDT FLD (MOX) 3 SW UTC-6(-5DT) N45°33.96' W95°58.03' **TWIN CITIES**
 1138 B S4 FUEL 100LL, JET A NOTAM FILE MOX **L-14H**
RWY 14-32: H4000X75 (ASPH) S-14, D-19 MIRL **IAP**
RWY 14: REIL. PAPI(P2L). **RWY 32:** REIL. PAPI(P2L).
RWY 04-22: 2640X150 (TURF) 0.6% up NE
RWY 04: Road. **RWY 22:** Road.
AIRPORT REMARKS: Attended Mon-Fri 1500-2300Z†. Fuel 24 hour credit card svc avbl. Rwy 04-22 CLOSED winter months. Ultralight tfc on and invof arpt. Rwy 04-22 not plowed winter months. Deer and waterfowl on and invof arpt. Fld conditions not updated ngts/weekends winter months. Rwy 04-22 marked with yellow cones. ACTIVATE MIRL Rwy 14-32 and REIL Rwy 14 and Rwy 32 and PAPI Rwy 14 and Rwy 32—CTAF.
WEATHER DATA SOURCES: AWOS-3 109.6 MOX (320) 589-1303.
COMMUNICATIONS: CTAF/UNICOM 122.8
MINNEAPOLIS CENTER APP/DEP CON 126.1
RCO 122.25 (PRINCETON RADIO)
RADIO AIDS TO NAVIGATION: NOTAM FILE MOX.
(T) VORW/DME 109.6 MOX Chan 33 N45°33.95' W95°58.15' at fld. 1132/5E. **AWOS-3.** VOR/DME unmonitored.

MOTLEY

MOREY'S (22Y) 1 S UTC-6(-5DT) N46°19.41' W94°38.32' **TWIN CITIES**
 1225 NOTAM FILE PNM **L-14H**
RWY 09-27: 2720X150 (TURF) **IAP**
RWY 09: Trees. **RWY 27:** Trees.
AIRPORT REMARKS: Attended Mon-Fri 1400-0000Z†, Sat-Sun 1400-0100Z†. Arpt CLOSED when snow covered, confirm conditions with arpt manager on 218-352-6600. Lgtd and marked 1533' MSL tower 1.3 NM west of arpt. Rwy 09-27 marked with yellow cones.
COMMUNICATIONS: CTAF 122.9
MINNEAPOLIS CENTER APP/DEP CON 118.05



MURDOCK MUNI (23Y) 0 S UTC-6(-5DT) N45°13.33' W95°24.07' **TWIN CITIES**
 1082 NOTAM FILE PNM
RWY 12-30: 3415X150 (TURF)
AIRPORT REMARKS: Unattended. Arpt CLOSED winter months. Rwy 12-30 marked with cones.
COMMUNICATIONS: CTAF 122.9

MYERS FLD (See CANBY)

NARY NATIONAL—SHEFLAND FLD (5C3) 3 NE UTC-6(-5DT) N47°22.52' W94°47.93'

TWIN CITIES

1389 B FUEL 100LL, JET A NOTAM FILE PNM

L-14H


RWY 17-35: H3850X60 (ASPH) LIRL (NSTD)

RWY 17: VASI(V2R). Trees. RWY 35: VASI(V2L). Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED indef. Deer on and in/ov arpt. Rwy 17-35 NSTD LIRL, lights 3' above grade and 10' from rwy edge. ACTIVATE NSTD LIRL Rwy 17-35-122.9.

COMMUNICATIONS: CTAF/UNICOM 122.8**RADIO AIDS TO NAVIGATION:** NOTAM FILE BJI.

BEMIDJI (L) VORTACW 108.6 BJI Chan 23 N47°34.55'
W95°01.49' 138° 15.1 NM to fld. 1410/4E. HIWAS.

**NEW ULM MUNI** (ULM) 2 W UTC-6(-5DT) N44°19.19' W94°30.14'

OMAHA

1011 B S4 FUEL 100LL, JET A NOTAM FILE ULM

L-121

RWY 15-33: H4401X75 (ASPH) MIRL

IAP

RWY 15: REIL. PAPI(P4L)—GA 3.0° TCH 40'. Road.

RWY 33: REIL. ODALS. PAPI(P4R)—GA 3.0° TCH 38'. Road.

RWY 04-22: 2480X160 (TURF)

RWY 22: Road.

AIRPORT REMARKS: Attended Mon-Sat dawn-dusk, Sun 1800-2300Z+. For svc after hrs call 507-359-1966. Rwy 04-22 CLOSED winter months. Ultralight t/c on and in/ov arpt. Rwy 04-22 marked with yellow cones. ACTIVATE MIRL Rwy 15-33, REIL Rwy 15 and Rwy 33, ODALS Rwy 33 and PAPI Rwy 15 and Rwy 33-122.8.

WEATHER DATA SOURCES: AWOS-3 118.325 (507) 359-1656.**COMMUNICATIONS:** CTAF/UNICOM 122.8

® MINNEAPOLIS CENTER APP/DEP CON 127.1

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)


RADIO AIDS TO NAVIGATION: NOTAM FILE MKT.

MANKATO (L) VOR/DME 110.8 MKT Chan 45 N44°13.19'

W93°54.74' 276° 26.1 NM to fld. 1026/7E.

NDB/DME (MHW) 272 ULM Chan 50 N44°19.08' W94°29.88'
at fld. DME Chan 50 paired with VHF frequency 111.30.

NOTAM FILE ULM.

**NEW YORK MILLS MUNI** (25Y) 2 SE UTC-6(-5DT) N46°30.13' W95°20.25'

TWIN CITIES

1401 B NOTAM FILE PNM

RWY 12-30: 2500X196 (TURF) LIRL (NSTD)

RWY 12: Road. RWY 30: Trees.

AIRPORT REMARKS: Unattended. Arpt CLOSED indef. Arpt CLOSED winter months. Rwy 12-30 marked with yellow cones. Rwy 12-30 NSTD LIRL, spacing irregular.

COMMUNICATIONS: CTAF 122.9**NODINE** N43°54.74' W91°28.05' NOTAM FILE PNM.

CHICAGO

(H) VORTAC 117.9 ODI Chan 126 249° 16.8 NM to Rushford Muni. 1282/1E.

H-21, L-28F

RCO 122.1R 117.9T (PRINCETON RADIO)

NORMAN CO ADA—TWIN VALLEY (See ADA-TWIN VALLEY)**NORTH COUNTRY SPB** (See DULUTH)

NORTHOME MUNI (43Y) 2 NE UTC-6(-5DT) N47°53.29' W94°15.52'

TWIN CITIES

1427 B TPA-2427(1000) NOTAM FILE PNM

RWY 12-30: 3199X147 (TURF) LIRL (NSTD)

RWY 12: Trees.

RWY 30: Trees.

RWY 02-20: 2201X148 (TURF)

RWY 02: Trees.

RWY 20: Thld dsplcd 150'. Trees.

AIRPORT REMARKS: Unattended. Rwy 02-20 CLOSED winter months. Rwy 12-30 SE 800' soft and uneven. Rwy 02-20 and dsplcd thld marked with yellow cones. Rwy 12-30 marked with yellow cones. Rwy 12-30 NSTD LIRL variable spacing.

COMMUNICATIONS: CTAF 122.9**OLIVIA RGNL** (OVL) 2 W UTC-6(-5DT) N44°46.71' W95°01.97'

TWIN CITIES

1076 B S3 FUEL 100LL NOTAM FILE OVL

L-121, 14H

RWY 11-29: H3498X75 (ASPH) LIRL

IAP

RWY 11: Tree.

RWY 29: Tree.

AIRPORT REMARKS: Attended Apr-Oct 1400-2300Z. Nov-Mar Mon-Fri 1400-2300Z, Nov-Mar Sat 1400-1800Z. For service after hrs call 320-523-5842 or 320-235-3397. Windssock unreliable. Trees obstruct SE.


WEATHER DATA SOURCES: AWOS-3 119.275 (320) 523-5924.**COMMUNICATIONS:** CTAF/UNICOM 122.8

④ MINNEAPOLIS CENTER APP/DEP CON 127.1

RADIO AIDS TO NAVIGATION: NOTAM FILE RWF.**REDWOOD FALLS (H) VORW/DME** 113.3 RWF Chan 80

N44°28.04' W95°07.69' 005° 19.1 NM to fld.

1061/7E. HIWAS.

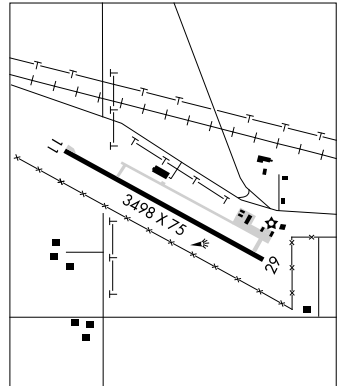**ORR RGNL** (ORB) 3 SW UTC-6(-5DT) N48°00.96' W92°51.36'

GREEN BAY

1311 B FUEL 100LL, JET A NOTAM FILE ORB

L-141

RWY 13-31: H4001X75 (ASPH) MIRL

IAP

RWY 13: REIL. PAPI(P4L)—GA 3.0° TCH 20'.

RWY 31: REIL. PAPI(P4L)—GA 3.0° TCH 20'. Trees.

AIRPORT REMARKS: Attended 1500-2200Z. Fuel available 24 hrs with credit card. Birds and wildlife on and in/ovf arpt. Ultralight activity on and in/ovf arpt. Rwy 13-31 grass and ground were showing through previously sealed cracks on the runway, ramp and twys. ACTIVATE MIRL Rwy 13-31, REIL Rwy 13 and Rwy 31 and PAPI Rwy 13 and Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.325 (218) 757-3169.**COMMUNICATIONS:** CTAF/UNICOM 122.8

④ MINNEAPOLIS CENTER APP/DEP CON 120.9

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)


RADIO AIDS TO NAVIGATION: NOTAM FILE INL.**INTERNATIONAL FALLS (L) VORTACW** 111.0 INL Chan 47

N48°33.95' W93°24.34' 140° 39.7 NM to fld.

1180/6E. HIWAS.

NDB (MHW) 341 ORB N48°01.11' W92°51.69' at fld.

NOTAM FILE ORB. Unmonitored.

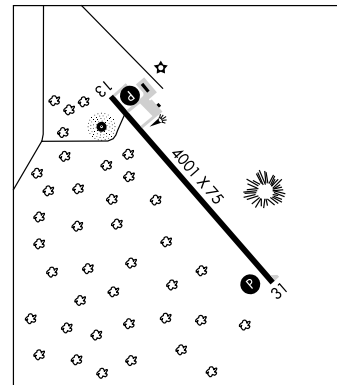

ORTONVILLE MUNI—MARTINSON FLD (VVV) 1 SE UTC-6(-5DT)

TWIN CITIES

L-121, 14H

IAP

N45°18.34' W96°25.47'

1100 B FUEL 100LL NOTAM FILE VVV

RWY 16-34: H3417X75 (ASPH) S-30 MIRL

RWY 16: PAPI(P4L). Road. RWY 34: PAPI(P4L). Tree.

RWY 04-22: 2158X300 (TURF)

RWY 04: Pole. RWY 22: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z†. Self serve fuel avb 24 hrs with credit card. Rwy 04-22 not plowed winter months. Rwy 04-22 marked with yellow cones. MIRL Rwy 16-34 preset low intensity, increase intensity—CTAF. PAPI Rwy 16 and Rwy 34 operates 24 hrs.

WEATHER DATA SOURCES: AWOS-3 332 VVV (320) 839-2363.**COMMUNICATIONS:** CTAF/UNICOM 122.8

MINNEAPOLIS CENTER APP/DEP CON 128.5

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE MOX.


MORRIS (T) VORW/DME 109.6 MOX Chan 33 N45°33.95'

W95°58.15' 226° 24.8 NM to fld. 1132/5E. VOR/DME

unmonitored.

NDB (MHW) 332 VVV N45°18.10' W96°25.25' at fld.

AWOS-3. NOTAM FILE VVV. Unmonitored.

**OWATONNA DEGNER RGNL** (OWA) 3 NW UTC-6(-5DT) N44°07.38' W93°15.53'

OMAHA

H-21, L-12J

IAP

1145 B S4 FUEL 100LL, JET A TPA—1997(852) NOTAM FILE OWA

RWY 12-30: H5500X100 (CONC) S-30, D-60 HIRL 0.7% up SE

RWY 12: REIL. PAPI(P4L).

RWY 30: MALSR. REIL. PAPI(P4L). Sign.

RWY 05-23: H3000X75 (ASPH) MIRL

RWY 05: REIL. PAPI(P4L)—GA 3.0° TCH 24'.

RWY 23: REIL. PAPI(P4L)—GA 3.0° TCH 23'.

AIRPORT REMARKS: Attended May-Sep 1400-0200Z†, Oct-Apr 1400-0000Z†. For svc after hrs call 507-444-2448. Fuel avbl 24 hrs with credit card. Ultralights on and invof arpt. ACTIVATE HIRL Rwy 12-30, MIRL Rwy 05-23, REIL Rwy 05, Rwy 12, Rwy 23 and MALSR Rwy 30—CTAF.

WEATHER DATA SOURCES: AWOS-3 128.325 (507) 455-0642.**COMMUNICATIONS:** CTAF/UNICOM 122.7

RCO 122.25 (PRINCETON RADIO)

① ROCHESTER APP/DEP CON 119.8 (1100-0500Z†)

① MINNEAPOLIS CENTER APP/DEP CON 132.35 (0500-1100Z†)

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.


HALFWAY (T) VORW/DME 111.2 FOW Chan 49 N44°12.27'

W93°22.23' 133° 6.9 NM to fld. 1098/2E.

VOR/DME unmonitored.

TONNA NDB (LOM) 379 OW N44°04.43' W93°09.32' 301° 5.4 NM to fld.

ILS 109.55 I-OWA Rwy 30. LOM TONNA NDB.

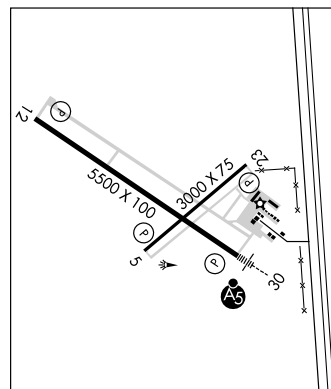

PARK RAPIDS MUNI—KONSHOK FLD (PKD) 2 S UTC-6(-5DT) N46°54.04' W95°04.39'

TWIN CITIES

1445 B S4 FUEL 100LL, JET A TPA—2402(957) NOTAM FILE PKD

H-21, L-14H

RWY 13-31: H5498X100 (ASPH) S-20, D-36 HIRL

IAP

RWY 13: REIL. PAPI(P4L)

RWY 31: MALSR. PAPI(P4L)

RWY 17-35: 3244X140 (TURF)


AIRPORT REMARKS: Attended Mon-Sat 1400-2300Z. 100LL avbl 24 hrs with credit card. Call 218-237-8528 for svc after hrs. Rwy 17-35 CLOSED winter months. No hold/ILS hold markers on turf twy between Rwy 21 and Rwy 35. Rwy 17-35 marked by yellow cones. ACTIVATE HIRL Rwy 13-31, REIL Rwy 13, MALSR Rwy 31, PAPI Rwy 13 and Rwy 31—CTAF.

WEATHER DATA SOURCES: ASOS 110.6 PKD (218) 732-0920**COMMUNICATIONS:** CTAF/UNICOM 123.0**RCO** 122.1R 110.6T (PRINCETON RADIO)**RADIO AIDS TO NAVIGATION:** NOTAM FILE PKD.

(L) VOR/DME 110.6 PKD Chan 43 N46°53.89' W95°04.25' at fld. 1441/4E. ASOS

SPIDA NDB (LOM) 269 PK N46°50.04' W94°58.53' 311° 5.7 NM to fld.

ILS 110.9 I-PKD Rwy 31. Class IC LOM SPIDA NDB.

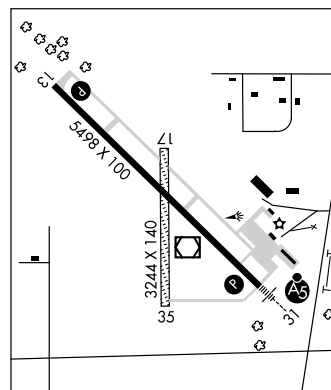**PAYNESVILLE MUNI** (PEX) 1 SW UTC-6(-5DT) N45°22.32' W94°44.69'

TWIN CITIES

1180 FUEL 100LL NOTAM FILE PEX

L-14H

RWY 11-29: H3300X75 (ASPH) MIRL

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs with credit card. MIRL Rwy 11-29 preset on low ints, to increase intensity and ACTIVATE dalgt hrs—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.35 (320) 243-4538.**COMMUNICATIONS:** CTAF 122.9**RADIO AIDS TO NAVIGATION:** NOTAM FILE PNM.

DARWIN (L) VORTAC 109.0 DWN Chan 27 N45°05.25' W94°27.23' 317° 21 NM to fld. 1130/7E.

PELICAN RAPIDS MUNI—LYON'S FLD (47Y) 4 N UTC-6(-5DT) N46°38.50' W96°06.27'

TWIN CITIES

1389 B FUEL 100LL, MOGAS NOTAM FILE PNM

RWY 15-33: 3260X150 (TURF) LIRL

RWY 15: Hill RWY 33: Hill.

AIRPORT REMARKS: Unattended. For fuel call 218-731-4050. Deer on and invof arpt. Rwy 15-33 marked with yellow cones.

COMMUNICATIONS: CTAF 122.9

PERHAM MUNI (16D) 2 NW UTC-6(-5DT) N46°36.25' W95°36.27'

TWIN CITIES

1371 B FUEL 100LL NOTAM FILE PNM

L-14H

RWY 12-30: H4100X75 (ASPH) MIRL

IAP

RWY 12: REIL. PAPI(P4L). RWY 30: REIL. PAPI(P4L). Trees.

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs with credit card.

Ultralights on and invof arpt. Helicopter ops, NW corner of arpt.

Rwy 12-30 rough ride, grass growing through cracks in rwy.

ACTIVATE MIRL Rwy 12-30, PAPI and REIL Rwy 12 and Rwy 30—CTAF.

COMMUNICATIONS: CTAF 122.9


MINNEAPOLIS CENTER APP/DEP CON 126.1

GC0 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE DTL.

DETROIT LAKES (T) VORW/DME 111.2 DTL Chan 49 N46°49.54'

W95°53.23' 134° 17.7 NM to fld. 1387/5E. Unmonitored.



PINECREEK

PINEY PINECREEK BORDER (48Y) 2 NW UTC-6(-5DT) N48°59.84' W95°58.84'

TWIN CITIES

1078 B FUEL 100LL OX 1,2 LRA NOTAM FILE PNM

L-14H

RWY 15-33: H3298X75 (ASPH) MIRL 0.4% up NW

IAP

AIRPORT REMARKS: Unattended. Self service fuel avbl 24 hrs. North parking ramp is in Canada, South parking ramp is in U.S. Customs office adjacent to arpt; customs phone is 218-463-1952. US customs hrs 1500-2300Z, 365 days a year. No svcs avbl after 2300Z. Canadian customs avbl 1500-0400Z. ACTIVATE MIRL Rwy 15-33—CTAF.

COMMUNICATIONS: CTAF/UNICOM 122.8

MINNEAPOLIS CENTER APP/DEP CON 134.75


RADIO AIDS TO NAVIGATION: NOTAM FILE ROX.

ROSEAU (L) VORW/DME 108.8 ROX Chan 25 N48°51.28'

W95°41.70' 302° 14.2 NM to fld. 1059/5E.

NDB (MHW) 342 PFT N48°59.54' W95°58.75' at fld.

NOTAM FILE PNM.



PINE RIVER RGNL (PWC) 1 E UTC-6(-5DT) N46°43.49' W94°22.90'

TWIN CITIES

1295 S4 FUEL 100LL NOTAM FILE PWC

L-14H

RWY 16-34: H3000X75 (ASPH) MIRL

IAP

RWY 16: REIL. VASI(V2L)—GA 3.0° TCH 23'. Trees.

RWY 34: REIL. VASI(V2L)—GA 3.0° TCH 23'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z \pm , Sat 1400-1800Z \pm . Fuel avbl 24 hrs with credit card. Ultralights on and invof arpt. Deer and waterfowl on and invof arpt. Confirm snow removal and winter conditions with arpt manager call 218-587-2440. Rwy 34 calm wind rwy. MIRL preset on medium ints, increase ints and ACTIVATE VASI Rwy 16 and Rwy 34 and REIL Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.525 (218) 587-3420.

COMMUNICATIONS: CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 118.05


RADIO AIDS TO NAVIGATION: NOTAM FILE BRD.

BRainerd (H) VORTACW 116.9 BRD Chan 116 N46°20.89'

W94°01.55' 324° 27.0 NM to fld. 1260/3E.

NDB (MHW) 330 PWC N46°43.62' W94°23.07' 23.07' at fld.

NOTAM FILE PWC.



PINEY PINECREEK BORDER (See PINECREEK)

PIPESTONE MUNI (PQN) 1 SE UTC-6(-5DT) N43°59.00' W96°18.02'

OMAHA

1736 B FUEL 100LL, JET A, MOGAS NOTAM FILE PQN

L-121

RWY 18-36: H4302X75 (ASPH) S-16, D-22 MIRL

IAP

RWY 18: REIL. PAPI(P4L)—GA 3.0° TCH 23'.

RWY 36: REIL. PAPI(P4L)—GA 3.0° TCH 28'.

RWY 09-27: 2539X221 (TURF) 0.5% up E

RWY 09: Trees. RWY 27: P-line.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z \pm . Fuel avbl 24 hrs with credit card. Rwy 09-27 not plowed winter months. Rwy 09-27 marked with yellow cones. ACTIVATE MIRL Rwy 18-36; REIL Rwy 18 and Rwy 36 and PAPI Rwy 18 and Rwy 36—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.375 (507) 825-6895.

COMMUNICATIONS: CTAF/UNICOM 122.8

® **MINNEAPOLIS CENTER APP/DEP CON** 132.05

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE FSD.


SIOUX FALLS (H) VORTACW 115.0 FSD Chan 97 N43°38.97'

W96°46.87' 037° 28.9 NM to fld. 1570/9E. **HIWAS.**

NDB/DME (MHW) 284 PQN Chan 28 N43°59.17' W96°17.79'

at fld. DME Chan 28 paired with VHF frequency 109.10.

NOTAM FILE PQN.



PRESTON**FILLMORE CO** (FKA) 4 W UTC-6(-5DT) N43°40.61' W92°10.79'**CHICAGO**


1277 B NOTAM FILE FKA

L-28F**RWY 11-29:** H4001X75 (ASPH) MIRL**IAP****RWY 11:** VASI(V2L)—GA 3.0° TCH 25'. Trees.**RWY 29:** VASI(V2L)—GA 3.0° TCH 25'. Road.**AIRPORT REMARKS:** Unattended. Ultralights on and invof arpt. ACTIVATE

MIRL Rwy 11-29, VASI Rwy 11 and Rwy 29—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.550 (507) 765-2182.**COMMUNICATIONS:** CTAF 122.9**ROCHESTER APP/DEP CON** 119.8 (1100-0500Z‡)**MINNEAPOLIS CENTER APP/DEP CON** 132.35 (0500-1100Z‡)**RADIO AIDS TO NAVIGATION:** NOTAM FILE RST.**ROCHESTER (L) VORW/DME** 112.0 RST Chan 57 N43°46.97'

W92°35.82' 104° 19.2 NM to fld. 1389/5E. HIWAS.

**PRINCETON MUNI** (PNM) 1 SW UTC-6(-5DT) N45°33.59' W93°36.49'**TWIN CITIES**980 B S2 **FUEL** 100LL NOTAM FILE PNM**L-14H****RWY 15-33:** H3900X75 (ASPH) MIRL**IAP****RWY 15:** REIL. PAPI(P4R)—GA 3.0° TCH 41'. Trees.**RWY 33:** REIL. PAPI(P4R)—GA 3.0° TCH 41'. Trees.**AIRPORT REMARKS:** Unattended. Fuel avbl 24 hrs with credit card.

Ultralights on and invof arpt. Occasional helicopter ops lgtd

hospital helipad 1 NM ESE Rwy 15-33. ACTIVATE MIRL Rwy

15-33—CTAF.


WEATHER DATA SOURCES: AWOS-3 119.025 (763) 389-0615. 368 PNM.**COMMUNICATIONS:** CTAF/UNICOM 123.0**PRINCETON FSS** (PNM) on arpt.**RCO** 122.2 (PRINCETON RADIO)® **MINNEAPOLIS CENTER APP/DEP CON** 121.05**RADIO AIDS TO NAVIGATION:** NOTAM FILE STC.**ST CLOUD (T) VORW/DME** 112.1 STC Chan 58 N45°32.96'

W94°03.52' 085° 19.0 NM to fld. 1023/3E. VOR

unmonitored.

NDB (MHW) 368 PNM N45°33.88' W93°36.46' at fld. NOTAM

FILE PNM.

**PYKLA** N46°50.77' W92°21.30' NOTAM FILE DLH.**GREEN BAY****NDB (MHW/LOM)** 379 DL 089° 6.7 NM to Duluth Intl. Unmonitored.**L-14I****QUENTIN AANENSON FLD** (See LUVERNE)**RAIZE** N48°28.88' W93°16.68' NOTAM FILE INL.**TWIN CITIES****NDB (H/LOM)** 353 IN 310° 7.1 NM to Falls Intl.**L-14H**

RAY S MILLER AAF (CAMP RIPLEY) (RYM) ARNG 1 NW UTC-6(-5DT)

TWIN CITIES

N46°05.48' W94°21.63'

H-21, L-14H

1150 NOTAM FILE RYM Not insp.

DIAP

RWY 13-31: H6100X100 (ASPH) PCN 27 F/A/W/T HIRL

RWY 31: MALSF.

RWY 132-312: 3500X80 (GRVL)

MILITARY SERVICE: LGT HIRL Rwy 13-31 opr low ints, to increase ints ACTIVATE—126.2 MALSF Rwy 31 opr when HIRL reach step 3. **FUEL** J8**MILITARY REMARKS:** Opr 1400-2130Z+, other times 48 hr prior notice rqr. **RSTD** PPR. Base OPS DSN 871-2781/2779/2780, C320-616-2781/2779/2780. **CAUTION** Rwy edge lgts positioned 25' from usable rwy sfc. **NS ABTMT** Procedure in effect. **MISC** Winds are estimated due to FMQ-13 wind sensors being accurate to within only +/-4 Kts. ATC/Wx will not include/relay wind correction into forecast phraseology. Therefore, aircrews will incorporate a +/-4 Kts accuracy into their decision making process for flying opr. Parking area capacity designated for 3 C130 acft simultaneously. Assault Strip marking center 3500' of rwy, 750' ovrn both ends. Ctc Base OPS for Assault Strip lgt.**WEATHER DATA SOURCES:** AWOS-3 148.35 360.25 (C320) 632-7500.**COMMUNICATIONS:**① **MINNEAPOLIS CENTER APP/DEP CON** 118.05 239.0**MILLER TOWER** 126.2 254.4 49.20 Mon-Fri 1400Z+-2200Z+, for NSTD hrs check NOTAMS. **CLNC DEL** 126.2**MILLER OPS** 49.65 **RANGE CONTROL** 304.3 36.1**AIRSPACE:** CLASS D Mon-Fri 1400Z+-2200Z+, for NSTD hrs check NOTAMS, other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE BRD.**BRAINERD (H) VORTACW** 116.9 BRD Chan 116 N46°20.89' W94°01.55' 219° 20.8 NM to fld. 1260/3E.**CAMP RIPLEY (T) TACAN** Chan 48 RYM (111.1) N46°05.46' W94°21.28' at fld. 1149/3E. NOTAM FILE

PNM. Unmonitored when Miller OPS clsd. Other times 48 hr prior notice rqr.

RIPLEY NDB (MHW) 404 XCR N46°04.75' W94°20.61' at fld. NOTAM FILE PNM.**ILS/DME** 111.1 I-RYM Chan 48 Rwy 31. Class IE. GS unusable for coupled approaches blo 1660'

MSL. Unmonitored when Miller OPS clsd.

RED LAKE FALLS MUNI (D81) 3 S UTC-6(-5DT) N47°49.50' W96°15.47'

TWIN CITIES

1061 B NOTAM FILE PNM

RWY 15-33: H2500X60 (ASPH) LIRL (NSTD)

RWY 15: Sign.

AIRPORT REMARKS: Unattended. Ultralights on and invof arpt. Rwy 15-33 NSTD LIRL; lgts 40 feet off sides of rwy.**COMMUNICATIONS:** CTAF 122.9**RED WING RGNL** (RGK) 3 NE UTC-6(-5DT) N44°35.36' W92°29.10'

GREEN BAY

778 B S4 **FUEL** 100LL, JET A NOTAM FILE RGK

H-21, L-121, 141, A

RWY 09-27: H5010X100 (ASPH) S-30, D-75 HIRL

IAP

RWY 09: MALSR. PAPI(P4L)—GA 3.0° TCH 35'.

RWY 27: REIL. PAPI(P4L)—GA 3.16° TCH 30'. Trees.

AIRPORT REMARKS: Attended Mon-Sat 1400-2300Z+, Sun

1600-2200Z+. 24hr credit card fuel avbl. Deer on and invof arpt.

For NS ABTMT procedure ctc aprt manager 651-385-3623. Red

Wing Rgnl is physically located in Wisconsin. ACTIVATE HIRL Rwy

09-27, MALSR Rwy 09, REIL Rwy 27, PAPI Rwy 09 and Rwy


27—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.25 (715) 594-3763.**COMMUNICATIONS:** CTAF/UNICOM 123.05**RED WING RCO** 122.6 (GREEN BAY RADIO)① **MINNEAPOLIS APP/DEP CON** 121.2**RADIO AIDS TO NAVIGATION:** NOTAM FILE PNM.**FARMINGTON (H) VORTAC** 115.7 FGT Chan 104 N44°37.86'

W93°10.92' 089° 30.0 NM to fld. 972/6E.

REGUE NDB (LOM) 274 RG N44°35.87' W92°38.85' 092° 7

NM to fld.

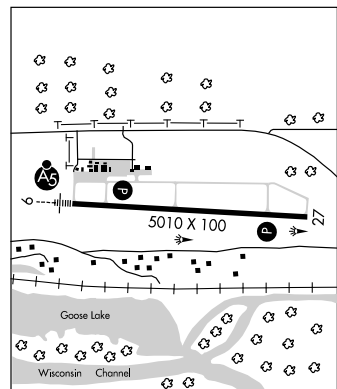ILS 110.1 I-RGK Rwy 09 LOM REGUE NDB.**REDWOOD FALLS** N44°28.04' W95°07.69' NOTAM FILE RWF.

TWIN CITIES

(H) VORW/DME 113.3 RWF Chan 80 016° 5.2 NM to Redwood Falls Muni. 1061/7E. **HIWAS.**

H-2H, L-121

RCD 122.4 (PRINCETON RADIO)

REDWOOD FALLS MUNI (RWF) 2 NE UTC-6(-5DT) N44°32.81' W95°04.92'

TWIN CITIES

1024 B S2 FUEL 100LL, JET A NOTAM FILE RWF

L-121

RWY 12-30: H4001X100 (ASPH) S-23, D-42 MIRL

IAP

RWY 12: REIL. PAPI(P2L). Trees.

RWY 30: REIL. PAPI(P2L). Hill.

RWY 05-23: 2081X200 (TURF)

RWY 05: Thld dsplcd 330'. Pole.

RWY 23: Thld dsplcd 176'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z+. Self serve fuel avb 24 hrs with credit card. Ultralights on and invof arpt. Rwy 05-23 CLOSED winter months. Rwy 05-23 dsplcd thld marked with yellow cones. ACTIVATE MIRL Rwy 12-30 and REIL and PAPI Rwy 12 and Rwy 30—CTAF.

WEATHER DATA SOURCES: ASOS 126.575 (507) 644-3564. HIWAS 113.3 RWF.

COMMUNICATIONS: CTAF/UNICOM 123.0


RCO 122.4 (PRINCETON RADIO)

MINNEAPOLIS CENTER APP/DEP CON 127.1

RADIO AIDS TO NAVIGATION: NOTAM FILE RWF.

(H) VORW/DME 113.3 RWF Chan 80 N44°28.04'

W95°07.69' 016° 5.2 NM to fld. 1061/7E. HIWAS.

**REGUE** N44°35.87' W92°38.85' NOTAM FILE RGK.

GREEN BAY

NDB (LOM) 274 RG 092° 7 NM to Red Wing Rgnl.

REMER MUNI (52Y) 1 N UTC-6(-5DT) N47°04.08' W93°54.85'

TWIN CITIES

1350 NOTAM FILE PNM

RWY 13-31: 2765X154 (TURF)

RWY 13: Trees.

RWY 31: Trees.

AIRPORT REMARKS: Unattended. Ultralight tfc on and invof arpt. Rwy 13-31 marked with orange/white A-frames.**COMMUNICATIONS:** CTAF 122.9**RICHARD B. HELGESON** (See TWO HARBORS)**RIPLEY** N46°04.75' W94°20.61' NOTAM FILE PNM.

TWIN CITIES

NDB (MHW) 404 XCR at Ray S Miller AAF.

L-14H

ROADD N48°51.77' W95°14.51' NOTAM FILE RAD.

TWIN CITIES

NDB (LOM) 360 SW 315° 6.3 NM to Warroad Intl Mem.

ROCHESTER INTL (RST) 7 SW UTC-6(-5DT) N43°54.50' W92°30.00'**CHICAGO**

1317 B S4 FUEL 100LL, JET A OX 3, 4 LRA Class I, ARFF Index B

H-21, L-121, 28F

NOTAM FILE RST

IAP, AD

RWY 13-31: H9033X150 (CONC) S-100, D-175, ST-175, DT-300

HIRL CL

RWY 13: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 53'. 0.4% up.

RWY 31: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 51'. 0.4% down.

RWY 02-20: H7300X150 (CONC-WC) S-100, D-175, ST-175,

DT-300 MIRL 0.4% up SW

RWY 02: REIL. VASI(V4L)—GA 3.0° TCH 47'.

RWY 20: REIL. PAPI(P4L)—GA 3.05° TCH 50'.

LAND AND HOLD SHORT OPERATIONS

LANDING	HOLD SHORT POINT	DIST AVBL
RWY 02	13-31	5850
RWY 13	02-20	5270
RWY 31	02-20	3200

RUNWAY DECLARED DISTANCE INFORMATION

RWY 02: TORA-7300 TODA-7300 ASDA-7300 LDA-7300

RWY 13: TORA-9033 TODA-9033 ASDA-9033 LDA-9033

RWY 20: TORA-7300 TODA-7300 ASDA-7300 LDA-7300

RWY 31: TORA-9033 TODA-9033 ASDA-9033 LDA-9033

AIRPORT REMARKS: Attended continuously. Waterfowl on and in/ovf arpt.

When twr clsd snow removal equipment operators monitor CTAF. 24 hr PPR for unscheduled air carrier ops with more than 9 passenger seats between 0500-1100Z, call 507-254-1161. VASI and PAPIs on continuously. When twr clsd HIRL Rwy 13-31 preset, to increase ints and ACTIVATE MIRL Rwy 02-20 and MALSR Rwy 13 and Rwy 31—CTAF. Rwy 13-31 RVR avbl during twr hrs of ops only. US Customs avbl Mon-Fri 1430-2300Z, after hrs and weekends require prior notification, call 507-285-5278.

WEATHER DATA SOURCES: ASOS (507) 285-0298. HIWAS 112.0 RST. LLWAS.**COMMUNICATIONS:** CTAF 118.3 ATIS 120.5 UNICOM 122.95

RCO 122.45 (PRINCETON RADIO)

① APP/DEP CON 119.2 (310°-129°) 119.8 (130°-309°) (1100-0500Z)

① MINNEAPOLIS CENTER APP/DEP CON 132.35 (0500-1100Z)

TOWER 118.3 (1100-0500Z) GND CON 121.9

AIRSPACE: CLASS D svc 1100-0500Z other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE RST.


(L) VORW/DME 112.0 RST Chan 57 N43°46.97' W92°35.82' 024° 8.6 NM to fld. 1389/5E. HIWAS.

ILS 108.5 I-RST Rwy 31

COPTER ILS 108.5 I-RST Rwy 31. Class IT.

ILS 109.1 I-MNK Rwy 13. Class IC. LOC unusable byd 25° left and right of centerline.

ASR (1100-0500Z)

**ROSEAU MUNI/RUDY BILLBERG FLD** (ROX) 3 E UTC-6(-5DT) N48°51.36' W95°41.83'**TWIN CITIES**

1060 B S4 FUEL 100LL, JET A NOTAM FILE ROX

L-14H

RWY 16-34: H4401X75 (ASPH) S-30, D-40 MIRL 0.3% up S

IAP

RWY 16: REIL. VASI(V2L)—GA 3.0° TCH 26'.

RWY 34: REIL. VASI(V2L)—GA 3.0° TCH 25'. Trees.

RWY 06-24: 2505X250 (TURF)

RWY 06: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z. Fuel avbl 24 hrs with credit card. Rwy 06-24 CLOSED winter months. Rwy 06-24 marked with yellow cones. Rwy 16 VASI OTS indef. ACTIVATE REIL Rwy 16, Rwy 34, VASI Rwy 16, Rwy 34, MIRL Rwy 16-34 preset low ints, to increase ints—CTAF.

WEATHER DATA SOURCES: AWOS-3 108.8 ROX (218) 463-1803.**COMMUNICATIONS:** CTAF/UNICOM 122.8


RCO 122.25 (PRINCETON RADIO)

① MINNEAPOLIS CENTER APP/DEP CON 134.75

RADIO AIDS TO NAVIGATION: NOTAM FILE ROX.

(L) VORW/DME 108.8 ROX Chan 25 N48°51.28'

W95°41.70' at fld. 1055/5E. AWOS-3



RUSH CITY RGNL (ROS) 1 NE UTC-6(-5DT) N45°41.83' W92°57.13'

GREEN BAY

926 B S2 FUEL 100LL, JET A NOTAM FILE ROS

L-14I

RWY 16-34: H4400X75 (ASPH) MIRL

IAP

RWY 16: REIL. PAPI(P4L). Tree.

RWY 34: REIL. PAPI(P4L). Tree.

AIRPORT REMARKS: Attended Mon-Fri 1300-2130Z±, Sat 1500-2130Z±. Self service fuel avbl with credit card. Trees +20' within 100' of centerline on E side of Rwy 16-34. ACTIVATE MIRL Rwy 16-34, PAPI Rwy 16 and Rwy 34 and REIL Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 282 ROS (320)358-3339.

COMMUNICATIONS: CTAF 122.9


MINNEAPOLIS CENTER APP/DEP CON 121.05

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

GOPHER (H) VORTACW 117.3 GEP Chan 120 N45°08.74' W93°22.39' 022° 37.6 NM to fld. 877/6E. HIWAS.

NDB (MHW) 282 ROS N45°41.81' W 92°57.35' at fld. AWOS-3. NOTAM FILE ROS.



RUSHFORD MUNI (55Y) 3 W UTC-6(-5DT) N43°48.95' W91°49.81'

CHICAGO

1211 B FUEL 100LL TPA-2211(1000) NOTAM FILE PNM

L-28F

RWY 16-34: H3200X60 (ASPH) MIRL 0.9% up NW

IAP

RWY 16: VASI(V2L). Trees. RWY 34: VASI(V2L). Trees.

AIRPORT REMARKS: Attended Mon-Fri 1500-2300Z±. For attendant call 507-454-2705. Self service fuel avbl with credit card. Deer on and in/ovf arpt. ACTIVATE MIRL Rwy 16-34 and VASI Rwy 16 and Rwy 34—CTAF.


COMMUNICATIONS: CTAF 122.9

① ROCHESTER APP/DEP CON 119.8 (1100-0500Z±)

① MINNEAPOLIS CENTER APP/DEP CON 132.35 (0500Z±-1100Z±)

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

NODINE (H) VORTAC 117.9 ODI Chan 126 N43°54.74' W91°28.05' 249° 16.8 NM to fld. 1282/1E.



ST CLOUD RGNL (STC) 4 E UTC-6(-5DT) N45°32.79' W94°03.59'

TWIN CITIES

1031 B S4 FUEL 100LL, JET A OX 1 TPA-1831(800) Class I, ARFF Index A

H-21, L-14H

NOTAM FILE STC

IAP, AD

RWY 13-31: H7000X150 (CONC-GRVD) S-75, D-175, ST-175, DT-280 HIRL

RWY 13: MALSR. PAPI(P4R). TCH 50'.

RWY 31: MALSR. PAPI(P4L). TCH 50'.

RWY 05-23: H3000X75 (ASPH-PFC) S-50, D-75, ST-95 MIRL

RWY 05: Tree.

RWY 23: Trees.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 05: TORA-3000 TODA-3000 ASDA-3000 LDA-3000

RWY 13: TORA-7000 TODA-7000 ASDA-7000 LDA-7000

RWY 23: TORA-3000 TODA-3000 ASDA-3000 LDA-3000

RWY 31: TORA-7000 TODA-7000 ASDA-7000 LDA-7000

AIRPORT REMARKS: Attended 1100-0530Z†. Deer, migratory waterfowl and other wildlife on and in/ovf arpt. Crop dusting operations on in/ovf arpt during summer months. Line of sight visibility is restricted from the Rwy 13 and 23 approach and Rwy 13 and 05 approach. Helipad not visible from ATCT and approach surfaces. 24 hrs PPR for unscheduled air carrier ops with more than 30 passenger seats call arpt manager 320-255-3251. Flight training on and in/ovf arpt. Rwy 05-23 not avbl for air carrier ops utilizing acft with more than 9 passenger seats. Rwy 31 calm wind rwy. Rwy 13-31 200' blast pad each end. HIRL Rwy 13-31 and MIRL Rwy 05-23 preset on low ints, to increase ints and ACTIVATE PAPI Rwy 13 and Rwy 31, and MALSR Rwy 13 and Rwy 31-CTAF.

WEATHER DATA SOURCES: ASOS 112.1 STC (320) 240-8781.**COMMUNICATIONS:** CTAF 118.25 ATIS 119.375 UNICOM 123.5

RCO 122.5 (PRINCETON RADIO)

(R) MINNEAPOLIS CENTER APP/DEP CON 121.05

ST CLOUD TOWER 118.25 (1300-0500Z†) GND CON 123.75


AIRSPACE: CLASS D svc 1300-0500Z† other times CLASS E.**RADIO AIDS TO NAVIGATION:** NOTAM FILE STC.

(T) VOR/DME 112.1 STC Chan 58 N45°32.96' W94°03.52' at fld. 1023/3E. ASOS. VOR unmonitored.

HUSSK NDB (LOM) 342 ST N45°28.74' W93°58.12' 314° 5.6 NM to fld.

ILS 111.9 I-STC Rwy 31. Class IC. LOM HUSSK NDB.

ILS 111.9 I-BPM Rwy 13.

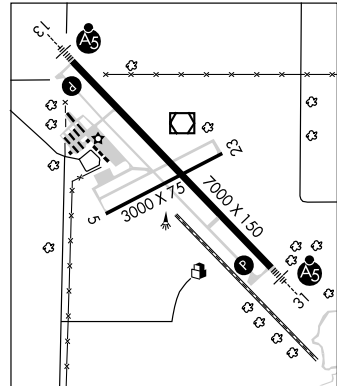**ST JAMES MUNI** (JYG) 3E UTC-6(-5DT) N43°59.18' W94°33.48'

OMAHA

1067 B FUEL 100LL, MOGAS NOTAM FILE JYG

L-121

RWY 15-33: H4000X75 (ASPH) MIRL

IAP

RWY 15: REIL. VASI(V2L)-GA 3.0° TCH 24'. Road.

RWY 33: REIL. VASI(V2L)-GA 3.0° TCH 24'. Trees.

AIRPORT REMARKS: Unattended. For svc call 507-375-4976 or 507-375-5241. Ultralight t/c on and in/ovf arpt. ACTIVATE MIRL Rwy 15-33, REIL Rws 15 and 33, VASI Rws 15 and 33-CTAF.

WEATHER DATA SOURCES: AWOS-3 260 JYG (507) 375-7105.**COMMUNICATIONS:** CTAF: 122.9.**(R) MINNEAPOLIS CENTER APP/DEP CON 127.75**


GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE FRM.

FAIRMONT (L) VOR/DME 110.2 FRM Chan 39 N43°38.76' W94°25.35' 337° 21.3 NM to fld. 1164/7E.

NDB(MHW) 260 JYG N43°59.13' W94°33.13' at fld.

AWOS-3. NOTAM FILE JYG.



ST PAUL

LAKE ELMO (21D) 9 E UTC-6(-5DT) N44°59.85' W92°51.34'

933 B S4 **FUEL** 100LL TPA-1933(1000) NOTAM FILE 21D

RWY 14-32: H2850X75 (ASPH) S-11 MIRL

RWY 14: REIL. P-line.

RWY 32: REIL. PAPI(P4R)—GA 3.0° TCH 26'. Road.

RWY 04-22: H2497X75 (ASPH) S-13 0.4% up NE

RWY 04: Tree. **RWY 22:** Trees.

AIRPORT REMARKS: Attended 1300-0000Z±. Self svc fuel avbl 24 hr with credit card. Ultralight tfo prohibited. ACTIVATE REIL Rwy 14, Rwy 32 and PAPI Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.075 (651) 779-5949.

COMMUNICATIONS: CTAF/UNICOM 122.8

® **MINNEAPOLIS APP/DEP CON** 121.2

MINNEAPOLIS CLNC DEL 118.625

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

GOPHER (H) VORTACW 117.3 GEP Chan 120 N45°08.74'


W93°22.39' 106° 23.7 NM to fld. 877/6E. **HIWAS.**

HOPEY NDB (MHW) 400 PPI N44°52.40' W92°56.53' 023° 8.3 NM to fld. NOTAM FILE STP.

GREEN BAY

L-121, 141, A

IAP



ST PAUL DOWNTOWN HOLMAN FLD (STP) 1 S UTC-6(-5DT) N44°56.08' W93°03.62'

TWIN CITIES

705 B S4 FUEL 100LL, JET A OX 1 TPA-1905(1200) LRA NOTAM FILE STP

H-21, L-12J, 141, A

RWY 14-32: H6491X150 (ASPH-GRVD) S-45, D-60, DT-140 HIRL

IAP, AD

RWY 14: MALSR. PAPI(P4R)—GA 3.0° TCH 42'. Thld dspcd 343'.

Tree.

RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 39'. Thld dspcd 382'.

Trees.

RWY 13-31: H4004X150 (ASPH) S-90, D-160, ST-175, DT-300

HIRL

RWY 13: PAPI(P4L)—GA 3.0° TCH 40'. Tree.

RWY 31: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Stack.

RWY 09-27: H3642X100 (ASPH) S-90, D-160, ST-175, DT-300

MIRL

RWY 09: Trees.

RWY 27: PAPI(P4R)—GA 4.0° TCH 40'. Trees. Rgt tfc.

ARRESTING GEAR/SYSTEM

RWY 14: EMAS

RWY 32: EMAS

AIRPORT REMARKS: Attended continuously. Arpt CLOSED to acft over

100,000 lbs. Deer and birds on and invof arpt. Complex airport

geometry. Verify correct compass heading prior to departure. For

noise abatement procedures call 612-725-6327. Aircraft please

follow voluntary noise abatement procedures as published. Rwy 14 runway visual range avbl touchdown, rollout.

Rwy 32 runway visual range avbl touchdown, rollout. When using Rwy 27 or Rwy 31, hazardous river tfc may

exist. SE arrivals and departures avoid tfc pattern ops at South St. Paul arpt 164° 5 NM at and blo 1720' MSL.

Twy A clsd between A2 and approach end of Rwy 32 except for wingspan less than 101'. Twy B clsd between MN

jet ramp and Twy A (southern corner) except for wingspan less than 72' due to flood wall obstacle. Rwy 13 PAPI

unusable byd 4° right of course and inside .5 NM. Rotating bcn OTS indef. Second rotating bcn located 2000'

SW of Rwy 14 110' AGL. When twr clsd to increase ints ACTIVATE HIRL Rwy 14-32 and MALSR Rwy 14—CTAF.

PAPI Rwy 13, Rwy 31, Rwy 14, Rwy 32 and Rwy 27 operates 24 hrs. Flight Notification Service (ADCUS) avbl.

WEATHER DATA SOURCES: ASOS (651) 298-1410. LAWRS.

COMMUNICATIONS: CTAF 119.1 ATIS 118.35 UNICOM 122.95

① MINNEAPOLIS APP/DEP CON 121.2

ST PAUL TOWER 119.1 Mon-Fri 1200-0400Z, Sat-Sun 1300-0400Z GND CON 121.675 CLNC DEL 121.675

MINNEAPOLIS CLNC DEL 121.675 Mon-Fri 0400-1200Z, Sat-Sun 0400-1300Z

AIRSPACE: CLASS D svc Mon-Fri 1200-0400Z, Sat-Sun 1300-0400Z other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

GOPHER (H) VORTACW 117.3 GEP Chan 120 N45°08.74' W93°22.39' 127° 18.4 NM to fld. 877/6E.

HIWAS.

BABCO NDB (LOM) 385 BA N44°51.40' W92°59.07' 322° 5.7 NM to fld.


HOPEY NDB (MHW) 400 PPI N44°52.40' W92°56.53' 303° 6.2 NM to fld. NOTAM FILE STP.

ILS/DME 111.5 I-BAO Chan 52 Rwy 32. Class IB. LOM BABCO NDB. DME unusable blo 3500' and byd 25° left of course. Glide slope OTS indef. ILS unmonitored when twr clsd.

ILS/DME 111.5 I-VKG Chan 52 Rwy 14. Class IB. LOC unusable byd 15° right and left of course.

Glide slope unusable byd 4° left and 4° right of course. ILS unmonitored when twr clsd.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

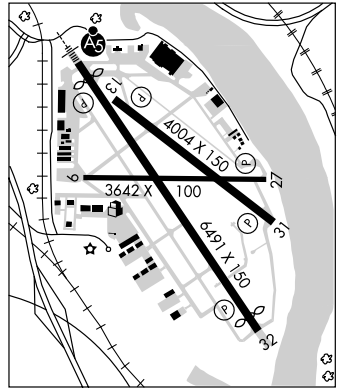

SAUK CENTRE MUNI (D39) 2 SE UTC-6(-5DT) N45°42.39' W94°56.00'

1244 B S3 FUEL 100LL TPA-2044(800) NOTAM FILE PNM

RWY 14-32: H3300X60 (ASPH) LIRL

RWY 08-26: 2270X140 (TURF)

RWY 26: Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z±. Fuel avbl 24 hrs with credit card. Rwy 08-26 CLOSED winter months. Rwy 08-26 rough ride. Based acft not using rwy. Ultralight tfc on and invof arpt. Rwy 08-26 marked with yellow cones.

WEATHER DATA SOURCES: AWOS-3 (320) 352-0136.

COMMUNICATIONS: CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 126.1


RADIO AIDS TO NAVIGATION: NOTAM FILE AXN.

ALEXANDRIA (L) VORW/DME 112.8 AXN Chan 75 N45°57.50' W95°13.96' 133° 19.7 NM to fld. 1367/7E. HIWAS.

TWIN CITIES

L-14H

IAP



SCOTT N48°15.60' W92°28.48' NOTAM FILE CDD.

NDB (MHW) 385 SCG at Scotts SPB. AWOS-3. VFR only.

GREEN BAY

SCOTTS SPB (See CRANE LAKE)

SILVER BAY MUNI (BFW) 7 SW UTC-6(-5DT) N47°14.94' W91°24.94'

1089 B FUEL 100LL NOTAM FILE BFW

RWY 07-25: H3200X75 (ASPH) S-26 MIRL

RWY 07: REIL. PAPI(P4L).

RWY 25: REIL. PAPI(P4L)—GA 3.0°.

AIRPORT REMARKS: Unattended. Self serve fuel avbl 24 hrs.

Caution—deer and wildlife on and invof arpt. Ultralight tfc on and invof arpt. ACTIVATE MIRL Rwy 07-25, REIL Rwy 07 and Rwy 25 and PAPI Rwy 07 and Rwy 25—CTAF.

WEATHER DATA SOURCES: AWOS-3 350 BFW (218) 226-3537.

COMMUNICATIONS: CTAF 122.9

® MINNEAPOLIS CENTER APP/DEP CON 134.55

RADIO AIDS TO NAVIGATION: NOTAM FILE DLH.

DULUTH (H) VORTACW 112.6 DLH Chan 73 N46°48.13'


W92°12.17' 045° 42.0 NM to fld. 1428/5E.

NDB (MHW) 350 BFW N47°15.04' W91°24.84' at fld. AWOS-3. NOTAM FILE PNM.

GREEN BAY

L-14I

IAP

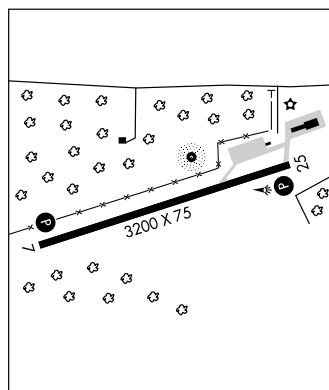

SKY HARBOR (See DULUTH)

SKY HARBOR SPB (See EVELETH)

SLAYTON MUNI (DVP) 1 W UTC-6(-5DT) N43°59.21' W95°46.96'

OMAHA

1623 B FUEL 100LL TPA-2423(800) NOTAM FILE DVP

L-121

RWY 17-35: H3005X60 (ASPH) LIRL (NSTD) 0.3% up S

IAP

RWY 17: REIL. SAVASI(V2L)-GA 3.0° TCH 21'. Road.

RWY 35: REIL. SAVASI(V2L)-GA 3.0° TCH 21'. Road.


AIRPORT REMARKS: Unattended. For svc call 507-836-6460. Rwy 17-35 LIRL NSTD due to spacing. ACTIVATE LIRL Rwy 17-35, SAVASI Rwy 17 and Rwy 35, REIL Rwy 17 and Rwy 35-CTAF.

WEATHER DATA SOURCES: AWOS-3 118.55 (507) 836-6128.**COMMUNICATIONS:** CTAF 122.9

MINNEAPOLIS CENTER APP/DEP CON 132.05

RADIO AIDS TO NAVIGATION: NOTAM FILE OTG.

WORTHINGTON (L) VOR/DME 110.6 OTG Chan 43 N43°38.82'
W95°34.92' 32.9° 22.2 NM to fld. 1571/8E.

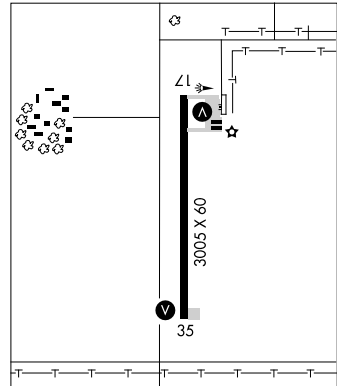**SLEEPY EYE MUNI** (Y58) 3 SE UTC-6(-5DT) N44°15.00' W94°43.02'

OMAHA

1004 NOTAM FILE PNM

RWY 14-32: 2570X300 (TURF) LIRL (NSTD)

RWY 32: Trees.

RWY 04-22: 2440X300 (TURF)

AIRPORT REMARKS: Unattended. Rwy 04-22 CLOSED winter months. Rwy 14-32 marked with yellow cones. Rwy

04-22 marked with yellow cones. Rwy 14-32 end lgts not in the same location as end cones. Rwy 14-32 NSTD LIRL due to variable spacing.

COMMUNICATIONS: CTAF 122.9**SOUTH ST PAUL MUNI-RICHARD E FLEMING FLD** (SGS) 2 S UTC-6(-5DT)

TWIN CITIES

N44°51.43' W93°01.97'

L-121, 141, A

821 B S3 FUEL 80, 100LL, JET A TPA-1721(900) NOTAM FILE SGS

IAP

RWY 16-34: H4002X100 (ASPH) S-30, D-57 MIRL

RWY 16: PAPI(P4L)-GA 3.0° TCH 40'. Trees.

RWY 34: PAPI(P4L)-GA 3.0° TCH 40'. Trees.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z†, Sat-Sun

1600-2300Z†. Self serve fuel avbl with credit card 24 hours.

Waterfowl on and invof arpt. Extended tfc pattern ops N of arpt may conflict with St Paul downtown arpt controlled airspace. Ctc

St Paul twr 119.1. Frequent helicopter ops over Mississippi River East of arpt blo 2200' MSL. MIRL Rwy 16-34 preset low ints, to increase ints ACTIVATE-CTAF.

WEATHER DATA SOURCES: AWOS-3 119.425 (651) 457-8120.**COMMUNICATIONS:** CTAF/UNICOM 122.7

® MINNEAPOLIS APP/DEP CON 121.2 MINNEAPOLIS CLNC DEL 118.2

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.


FARMINGTON (H) VORTAC 115.7 FGT Chan 104 N44°37.86'

W93°10.92' 019° 15.0 NM to fld. 972/6E.

HOPEY NDB (MHW) 400 PPI N44°52.40' W92°56.53' 253° 4.0

NM to fld. NOTAM FILE STP.

LOC/DME 108.35 I-SGS Chan 20Y LOC only.

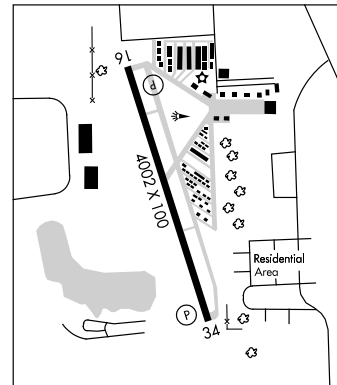**SOUTHWEST MINNESOTA RGNL MARSHALL/RYAN FLD** (See MARSHALL)**SPIDA** N46°50.04' W94°58.53' NOTAM FILE PKD.

TWIN CITIES

NDB (LOM) 269 PK 311° 5.7 NM to Park Rapids Muni-Konshok Fld.

SPRINGFIELD MUNI (D42) 1 SW UTC-6(-5DT) N44°13.86' W94°59.94'

OMAHA

1072 B FUEL 100LL NOTAM FILE PNM

L-121

RWY 13-31: H3400X75 (ASPH) S-12 MIRL

IAP

RWY 13: REIL. PAPI(P2L)—GA 3.0° TCH 20'. Road. Rgt tfc.

RWY 31: REIL. PAPI(P2L)—GA 3.0° TCH 20'.

AIRPORT REMARKS: Attended Mon-Fri 1430-2200Z, Sat 1430-1800Z. For svc after hrs call 507-723-3514 or 8881. Ultralight tfc on and invof arpt. Rwy 13-31 2" cracks at sawcuts with secondary cracking. MIRL Rwy 13-31 preset on low ints, to increase ints—CTAF. PAPI Rwy 13 and Rwy 31 on continuously. REIL Rwy 13 and Rwy 31 5 clicks med and 7 clicks high, 3 clicks off.

COMMUNICATIONS: CTAF/UNICOM 122.8


Ⓡ MINNEAPOLIS CENTER APP/DEP CON 127.1

RADIO AIDS TO NAVIGATION: NOTAM FILE RWF.

REDWOOD FALLS (H) VOR/DME 113.3 RWF Chan 80

N44°28.04' W95°07.69'

152° 15.2 NM to fld. 1061/7E. HIWAS.

**STANTON AIRFIELD** (SYN) 1 E UTC-6(-5DT) N44°28.53' W93°00.98'

OMAHA

920 S4 FUEL 100LL, MOGAS TPA-1720(800) NOTAM FILE SYN

RWY 18-36: 2550X200 (TURF)

RWY 18: Hill. RWY 36: Thld dsplcd 300'. Road.

RWY 09-27: 1970X180 (TURF)

RWY 09: Trees. RWY 27: Road.

AIRPORT REMARKS: Attended 1400Z-SS. For svc 507-645-4030 or 612-652-2280. Arpt CLOSED ngts. Glider ops on and invof arpt, surface thru 8000' MSL weekends during dalgt hrs, except winter months. Rwy 09-27 marked with yellow cones. Rwy 18-36 and dsplcd thld Rwy 36 marked with yellow cones.

WEATHER DATA SOURCES: AWOS-3 119.35 (507) 664-3806.**COMMUNICATIONS:** CTAF/UNICOM 122.8**STAPLES MUNI** (SAZ) 2 NW UTC-6(-5DT) N46°22.85' W94°48.40'

TWIN CITIES

1287 B FUEL 100LL NOTAM FILE SAZ

L-14H

RWY 14-32: H3304X75 (ASPH) MIRL

IAP

RWY 14: REIL. PAPI(P4L)—GA 3.0° TCH 27'. Road.

RWY 32: REIL. PAPI(P4L)—GA 3.0° TCH 27'. Road.

AIRPORT REMARKS: Unattended. Self serve fuel available 24 hrs with credit card. Occasional helicopter ops hospital helipad .89 NM ESE Rwy 14-32. To increase intensity and ACTIVATE MIRL Rwy 14-32 and PAPI Rwy 14 and Rwy 32 and REIL Rwy 14 and Rwy 32—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.325 (218) 894-3666.**COMMUNICATIONS:** CTAF 122.9

Ⓡ MINNEAPOLIS CENTER APP/DEP CON 118.05

GCD 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE AXN.


ALEXANDRIA (L) VOR/DME 112.8 AXN Chan 75 N45°57.50'

W95°13.96' 028° 31.0 NM to fld.

1367/7E. HIWAS.

NDB (MHW) 257 SAZ N46°22.94' W94°48.30' at fld.

Unmonitored. NOTAM FILE SAZ.



STARBUCK MUNI (D32) 1 S UTC-6(-5DT) N45°36.00' W95°32.02'

TWIN CITIES

1141 B NOTAM FILE PNM

RWY 15-33: 2512X198 (TURF) LIRL (NSTD)

RWY 15: Tree. RWY 33: Trees.

AIRPORT REMARKS: Unattended. Ultralight acft on and invof arpt. Rwy 15-33 marked with yellow cones. Rwy 15-33

NSTD LIRL, NSTD spacing.

COMMUNICATIONS: CTAF 122.9

STEPHEN MUNI (D41) 1 NE UTC-6(-5DT) N48°27.50' W96°51.77'

TWIN CITIES

830 B FUEL 100LL TPA-1630(800) NOTAM FILE PNM

RWY 17-35: H2700X60 (ASPH) LIRL

RWY 35: Road.

AIRPORT REMARKS: Attended dalgst hrs. Ultralight tfc on and invof arpt. Rwy 17-35 has rwy cracks. Antenna 1.85 SM southeast, 1,258' MSL (418'AGL).

COMMUNICATIONS: CTAF/UNICOM 122.7

SURFSIDE SPB (See LINO LAKES)**TAMIE** N45°47.50' W95°18.33' NOTAM FILE AXN.

TWIN CITIES

NDB (MHW/LOM) 374 EE 316° 5.8 NM to Chandler Fld.

L-14H

THIEF RIVER FALLS RGNL (TVF) 3 S UTC-6(-5DT) N48°03.94' W96°11.10'

TWIN CITIES

1119 B S4 FUEL 100LL, JET A, A+ Class I, ARFF Index A NOTAM FILE TVF

H-2H, L-14H

RWY 13-31: H6503X150 (ASPH-GRVD) S-75, D-90, ST-114, DT-155 HIRL IAP

RWY 13: REIL. PAPI(P4L)—GA 3.0° TCH 40'.

RWY 31: MALSR. PAPI(P4L)—GA 3.0° TCH 55'. Trees.

RWY 03-21: H4997X75 (ASPH-GRVD) D-30 MIRL

RWY 03: REIL. PAPI(P4L). TCH 34'

RWY 21: REIL. PAPI(P4L). TCH 34'

RUNWAY DECLARED DISTANCE INFORMATION

RWY 03: TORA-4997 TODA-4997 ASDA-4997 LDA-4997

RWY 13: TORA-6503 TODA-6503 ASDA-6503 LDA-6503

RWY 21: TORA-4997 TODA-4997 ASDA-4997 LDA-4997

RWY 31: TORA-6503 TODA-6503 ASDA-6503 LDA-6503

AIRPORT REMARKS: Attended 1200-0400Z+. Birds on and invof arpt.

Rwy 03-21 CLOSED to air carrier ops with more than 9 passenger seats. 48 hr PPR for unscheduled air carrier ops with more than 30 passenger seats; call arpt manager 218-681-7680.

Scheduled air carrier ops greater than 9 passenger seats in excess of 15 minutes from published times must ctc arpt to ensure ARFF is avbl prior to air carrier ops. ACTIVATE HIRL Rwy 13-31, MIRL Rwy 03-21, REIL Rwy 13, Rwy 03 and Rwy 21 and MALSR Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 108.4 TVF (218) 681-1918.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 123.6R 122.1R 108.4T (PRINCETON RADIO)

® MINNEAPOLIS CENTER APP/DEP CON 132.15


AIRSPACE: CLASS E svc 1100-0300Z+ other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE TVF.

(L) VOR/DME 108.4 TVF Chan 21 N48°04.16' W96°11.19' at fld. 1039/8E. AWOS-3. VOR portion unusable 325°-335°.

HARVI NDB (LOM) 260 HY N48°00.40' W96°05.75' 310° 5.0 NM to fld. Unmonitored.

ILS 110.5 I-HYZ Rwy 31 Class IE. LOM HARVI NDB. Unmonitored.

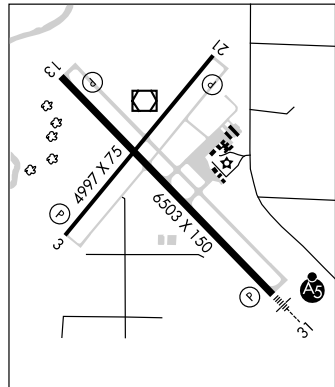**TODD FLD** (See LONG PRAIRIE)**TONNA** N44°04.43' W93°09.32' NOTAM FILE OWA.

OMAHA

NDB (LOM) 379 OW 301° 5.2 NM to Owatonna Degner Rgnl.

TOWER MUNI (12D) 1 NW UTC-6(-5DT) N47°49.09' W92°17.16'

GREEN BAY

1369 FUEL 100LL NOTAM FILE PNM

L-141

RWY 08-26: H3400X75 (ASPH) MIRL

IAP

RWY 08: Trees. RWY 26: Trees. Rgt tfc.

AIRPORT REMARKS: Unattended. Self service fuel avbl 24 hrs with credit card. Ultralight tfc on and invof arpt. ACTIVATE MIRL Rwy 08-26—CTAF.

COMMUNICATIONS: CTAF 122.9

® MINNEAPOLIS CENTER APP CON 127.0


MINNEAPOLIS CENTER DEP CON 127.0

RADIO AIDS TO NAVIGATION: NOTAM FILE ELO.

ELY (L) VOR/DME 109.6 ELO Chan 33 N47°49.31'

W91°49.81' 270° 18.7 NM to fld. 1489/OE.

.....
WATERWAY 14-32: 5000X200 (WATER)



TRACY MUNI (TKC) 1 NE UTC-6(-5DT) N44°14.95' W95°36.44'

OMAHA

1340 B FUEL 100LL NOTAM FILE TKC

L-121

RWY 11-29: H3100X75 (ASPH) MIRL

IAP

RWY 11: Road.

RWY 06-24: 2590X200 (TURF)

RWY 06: Road. RWY 24: Fence.

RWY 17-35: 1825X200 (TURF)

RWY 17: Road. RWY 35: Trees.

AIRPORT REMARKS: Unattended. For service call arpt manager: 507-629-3833/829-9310. Rwy 06-24 and Rwy 17-35 not plowed winter months. Rwy 06-24 and Rwy 17-35 marked with A-frames painted red and white. ACTIVATE MIRL Rwy 11-29—CTAF.

WEATHER DATA SOURCES: AWOS-3 120.0 (507) 629-9006.


COMMUNICATIONS: CTAF 122.9

® MINNEAPOLIS CENTER APP/DEP CON 127.1

RADIO AIDS TO NAVIGATION: NOTAM FILE RWF.

REDWOOD FALLS (H) VOR/DME 113.3 RWF Chan 80 N44°28.04'

W95°07.69' 231° 24.4 NM to fld. 1061/7E. HIWAS.

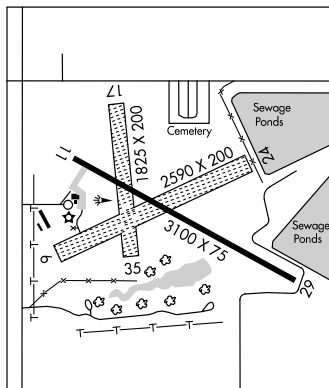

TWO HARBORS N47°03.12' W91°44.68' NOTAM FILE TWM.

GREEN BAY

NDB (MHW) 243 TWM at Richard B. Helgeson.

L-141

TWO HARBORS**RICHARD B HELGESON** (TWM) 4 NW UTC-6(-5DT) N47°02.95' W91°44.71'**GREEN BAY**

1073 B FUEL 100LL, MOGAS, JET A TPA-1873(800) NOTAM FILE TWM

L-141

RWY 06-24: H4400X75 (ASPH) MIRL

IAP

RWY 06: REIL. VASI(V2L)—GA 3.0° TCH 20'.

RWY 24: REIL. VASI(V2L)—GA 3.0° TCH 23'.

RWY 15-33: 2581X150 (TURF) 1.4% up NW

AIRPORT REMARKS: Attended dalgt hrs. For svc after hrs call

218-834-2969/3475'. Fuel 100LL and MOGAS avbl 24hrs with credit card. Rwy 15-33 CLOSED winter months except ski equipped acft. Rwy 15-33 marked with yellow cones. ACTIVATE MIRL Rwy 06-24, VASI and REIL Rwy 06 and Rwy 24—CTAF.

WEATHER DATA SOURCES: AWOS-3 119.325 (218) 834-6591.**COMMUNICATIONS:** CTAF 122.9

① DULUTH APP/DEP CON 125.45 (1200-0500Z‡)

① MINNEAPOLIS CENTER APP/DEP CON 127.9 (0500-1200Z‡)


GCO 121.725 (1200-0500Z‡) (DULUTH CLNC and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE DLH.

DULUTH (H) VORTACW 112.6 DLH Chan 73 N46°48.13'

W92°12.17' 047° 24.0 NM to fld. 1428/5E.

TWO HARBORS NDB (MHW) 243 TWM N47°03.12'
W91°44.68' at fld. NOTAM FILE TWM.

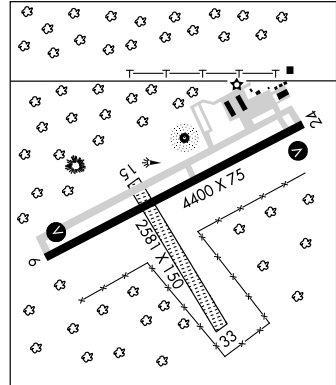**TYLER MUNI** (63Y) 1 NW UTC-6(-5DT) N44°17.50' W96°09.02'**OMAHA**

1742 B NOTAM FILE PNM

RWY 14-32: 2600X160 (TURF) LIRL

RWY 32: Road.

AIRPORT REMARKS: Unattended. Confirm snow removal and winter conditions with Arpt Manager from 1400-2300Z‡ call 504-247-5556. Rwy 14-32 marked with yellow cones.

COMMUNICATIONS: CTAF 122.9**WADENA MUNI** (ADC) 3 W UTC-6(-5DT) N46°27.02' W95°12.66'**TWIN CITIES**

1369 B S4 FUEL 100LL, MOGAS NOTAM FILE ADC

L-14H

RWY 16-34: H4005X75 (ASPH) MIRL 0.3% up NW

IAP

RWY 16: REIL. PAPI(P4L)—GA 3.0° TCH 42'.

RWY 34: REIL. PAPI(P4L)—GA 3.0° TCH 42'.

AIRPORT REMARKS: Mon-Fri 1400-2300Z‡. Fuel avbl 24 hrs with credit card only. Ultralight activity on and in/ov arpt. ACTIVATE MIRL Rwy 16-34 PAPI and REIL Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 128.325 (218) 631-7774.**COMMUNICATIONS:** CTAF/UNICOM 122.8


① MINNEAPOLIS CENTER APP/DEP CON 126.1

GCO 121.725 (MINNEAPOLIS CENTER and FLIGHT SERVICES)

RADIO AIDS TO NAVIGATION: NOTAM FILE AXN

ALEXANDRIA (L) VORW/DME 112.8 AXN Chan 75 N45°57.50'

W95°13.96' 355° 29.5 NM to fld. 1367/7E HIWAS.

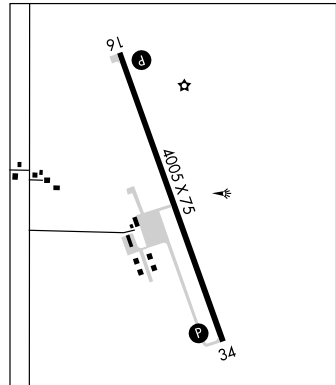

WALKER MUNI (Y49) 4 NW UTC-6(-5DT) N47°09.57' W94°38.73'

TWIN CITIES

1364 B FUEL 100LL NOTAM FILE PNM

L-14H

RWY 15-33: H3210X75 (ASPH) MIRL

RWY 15: REIL. PAPI(P4L)—GA 3.0° TCH 26'. Trees.

RWY 33: REIL. PAPI(P4L)—GA 3.0° TCH 24'. Trees.

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs by credit card. ACTIVATE MIRL Rwy 15-33, and PAPI Rwy 15 and Rwy 33, and REIL Rwy 15 and Rwy 33—CTAF.

COMMUNICATIONS: CTAF 122.9

RADIO AIDS TO NAVIGATION: NOTAM FILE PKD

PARK RAPIDS (L) VOR/DME 110.6 PKD Chan 43 N46°53.89' W95°04.25' 044° 23.5 NM to fld. 1441/4E.

WARREN MUNI (D37) 2 E UTC-6(-5DT) N48°11.47' W96°42.67'

TWIN CITIES

886 B FUEL 100LL NOTAM FILE PNM

L-14G

RWY 12-30: H3205X75 (ASPH) S-26 MIRL (NSTD)

IAP

RWY 12: Road. RWY 30: Trees.

RWY 04-22: 2606X200 (TURF)

RWY 04: Trees. RWY 22: Road.

AIRPORT REMARKS: Unattended. For arpt svcs call 218-745-5323 or 218-201-0033. Rwy 04-22 CLOSED winter months. Ultralight activity on and invof arpt. Deer on and invof arpt. Rwy 04-22 marked with yellow cones. Rwy 12-30 NSTD MIRL. Rwy end lgts positioned at pavement edge. Rwy lgts not frangible. Rwy 30, visual lighting on instrument rwy.

COMMUNICATIONS: CTAF/UNICOM 122.8

Ⓡ GRAND FORKS APP/DEP CON 118.1

RADIO AIDS TO NAVIGATION: NOTAM FILE TVF.

THIEF RIVER FALLS (L) VOR/DME 108.4 TVF Chan 21 N48°04.16' W96°11.19' 281° 22.3 NM to fld. 1039/8E.

WARROAD N48°55.88' W95°20.42'

TWIN CITIES

RCO 122.55 (PRINCETON RADIO)

H-21, L-14H

WARROAD INTL MEM (RRT) 2 NW UTC-6(-5DT)

TWIN CITIES

N48°56.49' W95°20.91'

H-21, L-14H

1076 B FUEL 100LL, JET A TPA-1876(800) LRA NOTAM FILE RRT

IAP

RWY 13-31: H5400X100 (ASPH) S-30, D-40 HIRL

RWY 13: REIL. PAPI(P4L)—GA 3.0° TCH 29'.

RWY 31: MALSR. PAPI(P4L)—GA 3.0° TCH 29'. Trees.

RWY 04-22: 2987X150 (TURF)

RWY 04: Trees. RWY 22: Trees.

AIRPORT REMARKS: Attended continuously. For svc nights and weekends call 218-386-1691 or 218-386-9431. Birds on and invof arpt. Rwy 04-22 clsd winter months. Rwy 04-22 marked with yellow cones. ACTIVATE HIRL Rwy 13-31; REIL Rwy 13 and MALSR Rwy 31—CTAF. PAPI Rwy 13 and Rwy 31 opr 24 hrs.

WEATHER DATA SOURCES: AWOS-3 119.925 (218) 386-1813.

COMMUNICATIONS: CTAF/UNICOM 123.05

RCO 122.55 (PRINCETON RADIO)

MINNEAPOLIS CENTER APP/DEP CON 134.75


RADIO AIDS TO NAVIGATION: NOTAM FILE ROX.

ROSEAU (L) VOR/DME 108.8 ROX Chan 25 N48°51.28'

W95°41.70' 064° 14.7 NM to fld. 1059/5E.

ROADD NDB (LOM) 360 SW N48°51.77' W95°14.51' 315° 6.3 NM to fld.

ILS/DME 110.1 I-SWE Chan 38 Rwy 31. LOM ROADD NDB.



WASECA MUNI (ACQ) 2 W UTC-6(-5DT) N44°04.41' W93°33.18'

OMAHA

1126 B S4 FUEL 100LL NOTAM FILE ACQ

L-12J

RWY 15-33: H3398X75 (ASPH) S-12.5 MIRL

IAP

RWY 15: VASI(V2L)—GA 2.5° TCH 35'.

RWY 33: VASI(V2L)—GA 2.5° TCH 35'.

AIRPORT REMARKS: Attended Mon-Fri 1400-0000Z. For svc after hrs call 507-835-5236. Parachute Jumping. Ultralight t/c on and invof arpt. Birds on and invof arpt. MIRL Rwy 15-33 preset on low ints, increase ints and ACTIVATE VASI Rwy 15 and Rwy 33—CTAF. NOTE: See Special Notices—Aerobatic Practice Areas.

WEATHER DATA SOURCES: AWOS-3 371 ACQ (507) 835-3657.

COMMUNICATIONS: CTAF/UNICOM 122.8

® MINNEAPOLIS CENTER APP/DEP CON 132.35

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.


HALFWAY (T) VORW/DME 111.2 FOW Chan 49 N44°12.27'

W93°22.23' 223° 11.1 NM to fld. 1098/2E.

Unmonitored.

NDB (MHW) 371 ACQ N44°04.22' W93°33.15' at fld.

AWOS-3 NOTAM FILE ACQ.



WASKISH MUNI (VWU) 1 S UTC-6(-5DT) N48°09.06' W94°31.98'

TWIN CITIES

1181 NOTAM FILE VWU

RWY 02-20: 3700X150 (TURF)

RWY 02: Trees.

AIRPORT REMARKS: Unattended. Some soft spots and weak turf. Rwy 02-20 marked with yellow cones.

WEATHER DATA SOURCES: AWOS-3 124.17 (218) 647-8415.

COMMUNICATIONS: CTAF 122.9

WAUBUN

JOLLY FISHERMAN SPB (M49) 17 E UTC-6(-5DT) N47°08.58' W95°31.74'

TWIN CITIES

1499 NOTAM FILE PNM

WATERWAY 08-26: 5000X1800 (WATER)

SEAPLANE REMARKS: Attended May-Oct daltg hrs; Nov-Apr unattended.

COMMUNICATIONS: CTAF 122.9

WELLS MUNI (68Y) 3 W UTC-6(-5DT) N43°44.00' W93°47.01'

OMAHA

1119 B S4 FUEL 100LL NOTAM FILE PNM

RWY 17-35: 2912X198 (TURF) LIRL (NSTD)

RWY 17: Road.

AIRPORT REMARKS: Attended Mon-Fri 1330-0200Z. Ultralight t/c on and invof arpt. Rwy 17-35 marked with yellow cones. Rwy 17-35 LIRL NSTD due to spacing.

COMMUNICATIONS: CTAF 122.9

WHEATON MUNI (ETH) 3 SW UTC-6(-5DT) N45°46.83' W96°32.63'

TWIN CITIES

1025 B S4 FUEL 100LL NOTAM FILE ETH

L-14H

RWY 16-34: H3300X75 (ASPH) MIRL

IAP

RWY 16: PAPI(P2L)—GA 3.0° TCH 25'.

RWY 34: PAPI(P2L)—GA 3.0° TCH 25'. Road.

RWY 04-22: 1919X175 (TURF)

RWY 04: Tree.

RWY 22: Crops.

AIRPORT REMARKS: Attended Apr-Sep daylight hours, Oct-Mar Mon-Fri

1400-2300Z±. Rwy 04-22 CLOSED winter months. Rwy 04

marked with A-Frames painted orange and white. PAPI Rwy 34 unusable byd 8° left of course. Rwy 16-34 MIRL preset to low

ints. To increase ints and ACTIVATE PAPI Rwy 16 and Rwy 34—CTAF.

WEATHER DATA SOURCES: AWOS-3 326 ETH (320) 563-4975.

COMMUNICATIONS: CTAF 122.8 UNICOM 122.8

MORRIS RCO 122.25 (PRINCETON RADIO)

MINNEAPOLIS CENTER APP/DEP CON 126.1

RADIO AIDS TO NAVIGATION: NOTAM FILE MOX.

MORRIS (T) VORW/DME 109.6 MOX Chan 33 N45°33.95'


W95°58.15' 293° 27.4 NM to fld. 1132/5E.

VOR/DME unmonitored.

NDB (MHW) 326 ETH N45°47.00' W96°32.81' at fld. NDB

unusable byd 10 NM.

AWOS-3. NOTAM FILE ETH. Unmonitored.



WILLMAR N45°07.05' W95°05.44' NOTAM FILE PNM.

TWIN CITIES

RCO 122.15 (PRINCETON RADIO).

L-121, 14H

WILLMAR MUNI-JOHN L. RICE FLD (BDH) 2 W UTC-6(-5DT) N45°07.02' W95°07.76'

TWIN CITIES

1126 B S4 FUEL 100LL, JET A NOTAM FILE BDH

H-21, L-121, 14H

RWY 13-31: H5500X100 (ASPH) HIRL

IAP

RWY 13: PAPI (P4R).

RWY 31: REIL. PAPI (P4L).

RWY 03-21: 2980X250 (TURF)

RWY 21: Ground.

AIRPORT REMARKS: Attended 1400Z±-2300Z±. Fuel self svc avbl with credit card. Rwy 03-21 has bare spots and

small brush in some areas. Old arpt 1 mile east is closed permanently. NSTD markings Rwy 03 and Rwy 21 marked with yellow cones. Rwy 13-31 200' pavement byd rwy, both ends. When wind is calm use Rwy 13. HIRL

Rwy 13-31 preset to low ints, to increase ints and ACTIVATE PAPI Rwy 13 and Rwy 31 and REIL Rwy 31—CTAF.

WEATHER DATA SOURCES: AWOS-3 113.7 BDH (320) 235-8287.

COMMUNICATIONS: CTAF/UNICOM 122.8

® MINNEAPOLIS CENTER APP/DEP CON 125.5.

RADIO AIDS TO NAVIGATION: NOTAM FILE PNM.

(T) VORW/DME 113.7 BDH Chan 84 N45°07.06' W95°07.62' at fld. 1125/4E. AWOS-3. Unmonitored.

ILS 109.5 I-BDH Rwy 13. Class IC. LOC only.

WINDOM MUNI (MWM) 3 N UTC-6(-5DT) N43°54.80' W95°06.56'

OMAHA

1410 B FUEL 100LL NOTAM FILE MWM

L-121

RWY 17-35: H3599X75 (ASPH) S-15, D-20 MIRL

IAP

RWY 17: REIL.

RWY 35: REIL.

AIRPORT REMARKS: Unattended. Fuel avbl 24 hrs with credit card.

Ultralights on and invof arpt. Birds on and invof arpt. Rwy 17-35 bumpy ride, multiple cracks. ACTIVATE MIRL Rwy 17-35 and REIL Rwy 17 and Rwy 35—CTAF.

WEATHER DATA SOURCES: AWOS-3 118.525 (507) 831-1833.**COMMUNICATIONS:** CTAF 122.9

④ MINNEAPOLIS CENTER APP/DEP CON 127.1.


RADIO AIDS TO NAVIGATION: NOTAM FILE RWF.

REDWOOD FALLS (H) VORW/DME 113.3 RWF Chan 80 N44°28.04' W95°07.69' 172° 33.2 NM to fld.

1061/7E. HIWAS.

NDB (MHW) 203 MWM N43°54.56' W95°06.55' at fld.

NOTAM FILE MWM.

**WINONA MUNI-MAX CONRAD FLD** (ONA) 3 NW UTC-6(-5DT) N44°04.63' W91°42.50'

GREEN BAY

656 B S4 FUEL 100LL, JET A NOTAM FILE ONA

H-21, L-28F

RWY 12-30: H5199X98 (ASPH) S-30, D-55 MIRL

IAP

RWY 12: REIL. VASI(V4L)—GA 3.0° TCH 42'. Trees.

RWY 30: MALSR. VASI(V4L)—GA 3.0° TCH 42'. Trees. Rgt tfc.

RWY 17-35: H2553X74 (ASPH)

RWY 17: Trees.

RWY 35: Thld dsplcd 151'. Trees. Rgt tfc.

AIRPORT REMARKS: Attended 1400-2300Z. Deer and waterfowl on and invof arpt. Rwy 17-35 grass growing through cracks, pavement bleached. MIRL Rwy 12-30 preset on low ints, to increase ints and ACTIVATE VASI Rwy 12 and Rwy 30, REIL Rwy 12 and MALSR Rwy 30—CTAF.

WEATHER DATA SOURCES: AWOS-3 111.4 ONA (507) 453-2991.**COMMUNICATIONS:** CTAF/UNICOM 122.8

RCO 122.15 (PRINCETON RADIO)

④ MINNEAPOLIS CENTER APP/DEP CON 128.6

RADIO AIDS TO NAVIGATION: NOTAM FILE ONA.(T) **VORW/DME** 111.4 ONA Chan 51 N44°04.57'W91°42.34' at fld. 654/1E. **AWOS-3.** Unmonitored.


VOR/DME unusable:

107°-117° byd 17 NM

118°-316°

317°-327° byd 17 NM

328°-106°

LOC/DME 109.35 I-ONA Chan 30(Y) Rwy 30.**WINSTED MUNI** (1ØD) 1 SW UTC-6(-5DT) N44°57.00' W94°04.02'

TWIN CITIES

1030 B FUEL 100LL NOTAM FILE PNM

RWY 09-27: 3248X200 (TURF) LIRL

RWY 09: Road.

RWY 27: Trees.

AIRPORT REMARKS: Attended 1400-0000Z. Fuel avbl 24 hrs with credit card. Ultralight activity on and invof arpt. Be alert of ultralight tfc in lower pattern. Rwy 09-27 marked with yellow cones.

COMMUNICATIONS: CTAF 122.9**WIPLINE SPB** (See INVER GROVE HEIGHTS)**WONDD** N43°37.04' W95°27.84' NOTAM FILE OTG.

OMAHA

NDB (LOM) 277 OT 287° 5.5 NM to Worthington Muni. OTS indef.

WORTHINGTON MUNI (OTG) 2 N UTC-6(-5DT) N43°39.30' W95°34.75'

OMAHA

H-5C, L-121

IAP

1574 B S2 FUEL 100LL, JET A NOTAM FILE OTG

RWY 11-29: H5499X100 (ASPH-GRVD) S-44, D-60 HIRL

RWY 11: REIL. PAPI(P4L)—GA 3.0° TCH 42'. Trees.

RWY 29: MALSR. PAPI(P4L)—GA 3.0° TCH 43'.

RWY 17-35: H4198X100 (ASPH-GRVD) S-44, D-60 MIRL

RWY 17: REIL. VASI(V4L)—GA 3.0° TCH 26'. RWY 35: REIL.

VASI(V4L)—GA 3.0° TCH 34'.

AIRPORT REMARKS: Attended Mon-Fri 1400-2300Z†. For svc call 537-376-9293, after hrs call 507-360-9959. Self service fuel with credit card. Rwy 17-35 alligator cracking. HIRL Rwy 11-29 preset on low ints, to increase ints and ACTIVATE MIRL Rwy 17-35, REIL Rwy 11, Rwy 17, and Rwy 35, PAPI Rwy 11, Rwy 29, and VASI Rwy 17 and Rwy 35, MALSR Rwy 29—CTAF.

WEATHER DATA SOURCES: AWOS-3 110.6 OTG (507) 376-9441.

COMMUNICATIONS: CTAF/UNICOM 122.8

RCO 123.6R 122.1R 110.6T (PRINCETON RADIO)

MINNEAPOLIS CENTER APP/DEP CON 132.05

AIRSPACE: CLASS E svc Mon-Fri 1200-1700Z† and 2100-0100Z†, Sat 1200-1700Z†, Sun 2100-0100Z† other times Class G.

RADIO AIDS TO NAVIGATION: NOTAM FILE OTG.

(L) VOR/DME 110.6 OTG Chan 43 N43°38.82' W95°34.92' at fld. 1571/8E. AWOS-3.

VOR unusable:

031°-049° byd 25 NM

096°-135° byd 15 NM blo 8000'

DME portion unusable:


120°-220° byd 30 NM blo 3,500'

269°-008° byd 15 NM blo 7000'.

220°-305° byd 30 NM blo 4,000'.

WONDD NDB (LOM) 277 OT N43°37.04' W95°27.84' 287° 5.5 NM to fld. OTS indef.

ILS 111.7 I-OTG Rwy 29. LOM WONDD NDB. OM WONDD OTS indef. GS unusable for coupled approaches blo 1770' MSL.



**INTENTIONALLY
LEFT
BLANK**

**INTENTIONALLY
LEFT
BLANK**

2010 U.S. & CANADIAN MILITARY AERIAL AIRCRAFT/PARACHUTE DEMONSTRATIONS

During CY 2010, the U.S. and Canadian Military Aerial Demonstration Teams (Thunderbirds, Blue Angels, Snowbirds, and Golden Knights) will be performing on the dates and locations listed below.

Pilots should expect Temporary Flight Restrictions (TFR) in accordance with 14 CFR Section 91.145, Management of aircraft operations in the vicinity of aerial demonstrations and major sporting events. The dimensions and effective times of the TFRs may vary based upon the specific aerial demonstration event and will be issued via the U.S. NOTAM system. Pilots are strongly encouraged to check FDC NOTAMs to verify they have the most current information regarding these airspace restrictions.

The currently scheduled 2010 aerial demonstration locations, subject to change without notice, are:

DATE:	USAF Thunderbirds	USN Blue Angels	USA Golden Knights	Canadian Snowbirds
June	5-6	Ocean City, MD	Eau Claire, WI	
	5-6		Florence, SC	
	12-13	Milwaukee, WI	Milwaukee, WI	
	19-20	Cape Girardeau, MO		
	Tinker AFB, OK			
	19-21		Cape Girardeau, MO	
	23		Ft McNair, VA	
	26-27	North Kingstown, RI	St. Cloud, MN	
	26-27		Fairmont, NC	
July	3		Madison, WI	
	3		Dubuque, IA	
	3-4	Traverse City, MI		
	10	Pensacola Beach, FL		
	10-11	Gary, IN	Gary, IN	
	17-18	Duluth, MN	Dayton, OH	
	24-25	Fairchild AFB, WA	Idaho Falls, ID	
	28	Cheyenne, WY		
	29		Goshen, IN	
	29		Ft AP Hill, VA	
	31	Rockford, IL	Anchorage, AK	Rockford, IL
August	1	Rockford, IL	Anchorage, AK	Rockford, IL
	7-8	Point Mugu NAS, CA	Seattle, WA	New Castle, PA
	14-15		Chicago, IL	Chicago, IL
	21-22	Westfield, MA		Westfield, MA
	25		Atlantic City, NJ	
	26		Ft Monroe, VA	
	28-29	Coney Island (Brooklyn), NY	Portsmouth, NH	Coney Island (Brooklyn), NY
	28-29		Portsmouth, NH	Portsmouth, NH
September	4-5	Martinsburg, WV		Cleveland, OH
	4-5			Martinsburg, WV
	4-6		Cleveland, OH	
	11-12	Corapolis (Pittsburgh), PA	Scott AFB, IL	Corapolis (Pittsburgh), PA
	11-12		Scott AFB, IL	
	17			Southern Pines, NC
	18-19	Whiteman AFB, MO	NAS Oceana, VA	Whiteman AFB, MO
	25-26	McConnell AFB, KS	MCAS Kaneohe Bay, HI	Reno, NV
				Chico, CA

DATE:		USAF Thunderbirds	USN Blue Angels	USA Golden Knights	Canadian Snowbirds
October	1-3		MCAS Miramar, CA		MCAS Miramar, CA
	2-3	Salinas, CA		MCAS Miramar, CA	
	2-3			Jackson, MS	
	9-10	Little Rock AFB, AR	San Francisco, CA	Little Rock, AFB, AR	Daytona Beach, FL
	16-17	El Paso, IX	Dobbins AFB, GA	El Paso, TX	Atlanta, GA
	23-24		NAS Jacksonville, FL	Washington, DC	
	30-31	Houston, TX	Ft Worth Alliance, TX	Ft Worth Alliance, TX	
		Cocoa Beach, FL			
November	6-7	Lackland AFB, TX	Homestead ARB, FL	Lackland AFB, TX	
	6-7			Homestead ARB, FL	
	11-14			Ft Bragg, NC	
	12-13		NAS Pensacola, FL		
	13-14	Nellis AFB, NV			

Note: Dates and locations are scheduled "show dates" only and do not reflect arrival or practice date TFR periods that may precede the specific aerial demonstration events listed above. Again, pilots are strongly encouraged to check FDC NOTAMS to verify they have the most current information regarding any airspace restrictions.

The Eastern Iowa Airport Temporary Rwy 08-26

Starting June 3, 2010, The Eastern Iowa Airport will close Rwy 09-27 for reconstruction. The airport will commission the existing parallel Twy A into temporary Rwy 08-26. Use of Rwy 08-26 will relocate aircraft operations 500 feet north, toward the airport terminal and facilities operations area. The following are general construction phases:

June 3, 2010, Rwy 08-26 opens; Rwy 09-27 closed for construction; first 1,000' of rwy end 27 converted to twy.

On or about July 5, 2010, Rwy 13-31 closed for construction of Rwy 13-31 and Rwy 09-27 intersection; Rwy 08-26 will remain open.

On or about July 30, 2010, Rwy 13-31 reopens; Rwy 09-27 remains closed for continued construction; Rwy 08-26 will remain open.

On or about September 23, 2010, Rwy 09-27 reopens; Rwy 08-26 closed for conversion to Twy A, Rwy 13-31 will remain open.

More information can be found on The Eastern Iowa website at <http://www.crairport.org>.

Minneapolis, MN Class B Airspace

Due to the relocation and magnetic variation changes of the Flying Cloud (FCM), MN VOR/DME, two boundary radials of the Minneapolis, MN, Class B Airspace need to be relabeled on the Minneapolis-St. Paul VFR Terminal Area Chart. To the west of Minneapolis-St. Paul Intl. Airport, the boundary between the 4000' floor airspace and the 7000' floor airspace should be labeled as "FCM 299°". And to the southeast of Minneapolis-St. Paul Intl. Airport, the boundary between the 4000' floor airspace and the 7000' floor airspace should be labeled as "FCM 121°".

SEARCH LIGHT SHOW

Rosebud Casino, Valentine, Nebraska

Searchlight Activity will be conducted in an area within a 1 NM radius of 42 59 56N/100 34 29W (ANW315/36.5), 1500 AGL and above, from 1900 to 0200 local hours nightly. Searchlight beams may be injurious to pilots/passengers eyes at 1500 AGL and above. Flash blindness or cockpit illumination may occur at greater distances, up to several miles from the source. Huron AFSS, 866-732-1331, is the FAA coordination facility.

SPECIAL NORTH ATLANTIC, CARIBBEAN AND PACIFIC AREA COMMUNICATIONS

VHF air-to-air frequencies enable aircraft engaged in flights over remote and oceanic areas out of range of VHF ground stations to exchange necessary operational information and to facilitate the resolution of operational problems.

Frequencies have been designated as follows:

North Atlantic area:	123.45 MHz
Caribbean area:	123.45 MHz
Pacific area:	123.45 MHz

MILITARY TRAINING ROUTES

The DOD Flight Information Publication AP/1B provides textual and graphic descriptions and operating instructions for all military training routes (IR, VR, SR) and refueling tracks/anchors. Complete and more comprehensive information relative to policy and procedures for IRs and VRs is published in FAA Handbook 7610.4 (Special Military Operations) which is agreed to by the DOD and therefore directive for all military flight operations. The AP/1B is the official source of route data for military users.

**AEROBATIC PRACTICE AREA
FORT SCOTT MUNICIPAL AIRPORT (FSK), FORT SCOTT, KS**

Aerobatic practice will be conducted within 1 NM radius of Fort Scott Municipal Airport (FSK), SFC to 5,000 feet AGL. The practice area is for waiver holders only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

HAROLD KRIER FIELD (K58), ASHLAND, KS

Aerobatic practice will be conducted within 2 NM radius of Harold Krier Field (K58), SFC to 3,500 feet AGL. The practice area is for waiver holders only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

WAMEGO MUNICIPAL AIRPORT (69K), MANHATTAN, KS

Aerobatic practice will be conducted within 1 NM radius of Wamego Municipal Airport (69K) SFC to 4,500 feet MSL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

GRANITE FALLS MUNI/LENZEN-ROE, AIRPORT, (GDB) GRANITE FALLS, MN

Aerobatic practice will be conducted within 2 NM radius of MVE160012, SFC to 6,000 feet MSL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

WASECA MUNICIPAL AIRPORT (ACQ), WASECA, MN

Aerobatic practice will be conducted within 1 NM radius of Waseca Municipal Airport (ACQ), 500 feet AGL to 4,000 feet MSL. The practice area is for registered users only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

SEWARD COUNTY AIRPORT (SWT), SEWARD, NE

Aerobatic practice will be conducted within 1 NM radius of Seward County Airport (SWT), SFC to 7,000 feet MSL. The practice area is for waiver holders only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

PIERRE REGIONAL AIRPORT (PIR), PIERRE, SD

Aerobatic practice will be conducted within 2 NM radius of Pierre Regional Airport (PIR), SFC to 3,300 feet MSL. The practice area is for waiver holders only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

SKIE-LINCOLN AIRPORT (Y14), TEA, SD

Aerobatic practice will be conducted within 1 NM radius of Skie-Lincoln County Airport (Y14), SFC to 5,000 feet MSL. The practice area is for waiver holders only. Pilots should use caution when operating in this area. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

MODEL ROCKET ACTIVITY

ANTHONY, KS

Model Rocket activity will be conducted within a 5 NM radius of ANY081021, SFC to 34,500 feet AGL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

ELLINWOOD, KS

Model Rocket activity will be conducted within a 3 NM radius of the Ellinwood Airport (1K6), with an alternate site of 2 NM Northwest of Ellinwood Airport (1K6), SFC to 10,000 feet AGL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

PITTSBURG, KS

Model Rocket activity will be conducted within a 3 NM radius of OSW045034, SFC to 18,000 feet MSL, SR-SS. For further information, contact Flight Services at 1-800-WX-BRIEF (992-7433).

HALLSVILLE, MO

Model Rocket activity will be conducted within a 2 NM radius of HLV299010, SFC to 6,000 feet AGL, SR-SS. For further information contact Flight Services at 1-800-WX-BRIEF (992-7433).

CIVIL USE OF MILITARY FIELDS:

U.S. Army, Air Force, Navy and Coast Guard Fields are open to civil fliers only in emergency or with prior permission. Army installations, prior permission is required from the Commanding Officer of the installation.

For Air Force installations, prior permission should be requested at least 30 days prior to first intended landing from either Headquarters USAF (PRPOC) or the Commander of the installation concerned (who has authority to approve landing rights for certain categories of civil aircraft). For use of more than one Air Force installation, requests should be forwarded direct to Hq USAF (PRPOC), Washington, D.C. 20330.

Use of USAF installations must be specifically justified.

For Navy and Marine Corps installations, prior permission should be requested at least 30 days prior to first intended landing. An Aviation Facility License must be approved and executed by the Navy prior to any landing by civil aircraft.

Forms and further information may be obtained from the nearest U.S. Navy or Marine Corps aviation activity.

For Coast Guard fields prior permission should be requested from the Commandant, U.S. Coast Guard via the Commanding Officer of the field.

When instrument approaches are conducted by civil aircraft at military airports, they shall be conducted in accordance with the procedures and minimums approved by the military agency having jurisdiction over the airport.

AIRCRAFT LANDING RESTRICTIONS

Landing of aircraft at locations other than public use airports may be a violation of Federal or local law. All land and water areas are owned or controlled by private individuals or organizations, states, cities, local governments, or U.S. Government agencies. Except in emergency, prior permission should be obtained before landing at any location that is not a designated public use airport or seaplane base.

Landing of aircraft is prohibited on lands or waters administered by the National Park Service, U.S. Fish and Wildlife Service, U.S. Forest Service, and on many areas controlled by the U.S. Army Corps of Engineers, unless prior authorization is obtained from the respective agency.

CONTROLLED FIRING**Parsons, Kansas****(Until Further Notice)**

Controlled Firing Area 1 NM radius 37°17'39"N/95°08'46"W, SFC-3200 MSL, Eff weekdays 0630-1700 LCL

**INTERSECTION DEPARTURES DURING PERIOD OF DARKNESS
MINNEAPOLIS-ST PAUL INTERNATIONAL/WOLD-CHAMBERLAIN AIRPORT (MSP)
MINNEAPOLIS, MINNESOTA**

Minneapolis International Airport Traffic Control Tower has been granted a waiver to the guideline that prohibits the control tower from taxiing an aircraft into "position and hold" at an intersection, between sunset and sunrise.

This waiver allows the tower to taxi the aircraft into "position and hold" during period of darkness, at the intersections listed below.

Runway 4 at Taxiways "S", "C2", "C3", "M2", or "M3"

Aircraft shall not taxi into position and hold under the provisions of this waiver when the subject intersection is not visible from the tower. When the provisions of this waiver are being exercised, the affected runway shall be used for departures only. Intersection departures will continue to be utilized at other locations between sunset and sunrise. However, aircraft cannot be taxied into "position and hold" prior to takeoff clearance.

LAMBERT-ST LOUIS INTERNATIONAL (STL), MISSOURI

STL Precision Runway Monitor Electronic Scan Radar System (PRM) commissioned. Full utilization of PRM is pending the future implementation of simultaneous instrument approaches. Until then no operational impact will result from the commissioning of PRM.

**SIMULTANEOUS OFFSET INSTRUMENT APPROACH (SOIA) PROCEDURE FOR PILOTS
FILING FLIGHT PLANS TO LAMBERT-ST LOUIS INTERNATIONAL AIRPORT (STL)**

Effective Thursday, October 27, 2005. During the hours of 0700-2200 local, STL ATC may utilize LDA PRM and ILS PRM approaches as weather and traffic demand dictate. Aircraft arriving from the northeast and northwest (primarily over PETTI and LORLE intersections) should expect ILS PRM Runway 30R. Aircraft arriving from the west and southeast (primarily over FTZ and QBALL) should expect LDA PRM Runway 30L. If unable to participate in PRM apchs acft operators are required to contact FAA ATCSCC directly at 1-800-333-4286 or 703-904-4452 prior to departure to obtain a pre-coordinated arrival time. Non-participating acft may encounter delays. Pilot requirements and procedures are outlined in U.S. Terminal Procedures Publications available on pages entitled "ATTENTION ALL USERS OF ILS PRECISION RUNWAY MONITOR (PRM)" or "ATTENTION ALL USERS OF LDA PRECISION RUNWAY MONITOR (PRM)". This notice is effective until further notice.

CONTINUOUS POWER FACILITIES

In order to insure that a basic ATC system remains in operation despite an areawide or catastrophic commercial power failure, key equipment and certain airports have been designated to provide a network of facilities whose operational capability can be utilized independent of any commercial power supply.


In addition to those facilities comprising the basic ATC system, the following approach and lighting aids have been included in this program for a selected runway.

1. ILS (Localizer, Glide Slope, COMLO, Inner, Middle and Outer Markers)
2. Wind Measuring Capability
3. Approach Light System (ALS) or Short ALS (SALS)
4. Ceiling Measuring Capability
5. Touchdown Zone Lighting (TDZL)
6. Centerline Lighting (CL)
7. Runway Visual Range (RVR)
8. High Intensity Runway Lighting (HIRL)
9. Taxiway Lighting
10. Apron Light (Perimeter Only)

The following have been designated "Continuous Power Airports," and have independent back up capability for the equipment installed.

Airport/Ident	Runway No.	Airport/Ident	Runway No.
Albuquerque, NM (ABQ)	08	Milwaukee, WI (MKE)	01L
Anchorage, AK (ANC)	07R	Minneapolis, MN (MSP)	30L
Andrews AFB, MD (ADW)	01L	Nashville, TN (BNA)	02L
Atlanta, GA (ATL)	09R	New Orleans, LA (MSY)	10
Baltimore, MD (BWI)	10	New York, NY (JFK)	04R
Bismarck, ND (BIS)	31	New York, NY (LGA)	22
Boise, ID (BOI)	10R	Newark, NJ (EWR)	04R
Boston, MA (BOS)	04R	Oklahoma City, OK (OKC)	35R
Charlotte, NC (CLT)	36L	Omaha, NE (OMA)	14R
Chicago, IL (ORD)	10	Ontario, CA (ONT)	26L
Cincinnati, OH (CVG)	36C	Philadelphia, PA (PHL)	09R
Cleveland, OH (CLE)	06R	Phoenix, AZ (PHX)	08
Dallas/Fort Worth, TX (DFW)	17C	Pittsburgh, PA (PIT)	10L
Denver, CO (DEN)	35R	Reno, NV (RNO)	16R
Des Moines, IA (DSM)	31	Salt Lake City, UT (SLC)	34L
Detroit, MI (DTW)	03R	San Antonio, TX (SAT)	12R
El Paso, TX (ELP)	22	San Diego, CA (SAN)	09
Fairbanks, AK (FAI)	01L	San Francisco, CA (SFO)	28R
Great Falls, MT (GTF)	03	San Juan, PR (SJU)	08
Honolulu, HI (HNL)	08L	Seattle, WA (SEA)	16C
Houston, TX (IAH)	26L	St. Louis, MO (STL)	30R
Indianapolis, IN (IND)	05L	Tampa, FL (TPA)	36L
Jacksonville, FL (JAX)	07	Tulsa, OK (TUL)	36R
Kansas City, MO (MCI)	19R	Washington, DC (DCA)	01
Los Angeles, CA (LAX)	24R	Washington, DC (IAD)	01R
Memphis, TN (MEM)	36L	Wichita, KS (ICT)	01L
Miami, FL (MIA)	08R		

NOTE—The existing CPA runway is listed. Pending and future changes at some locations will require a revised runway designation.

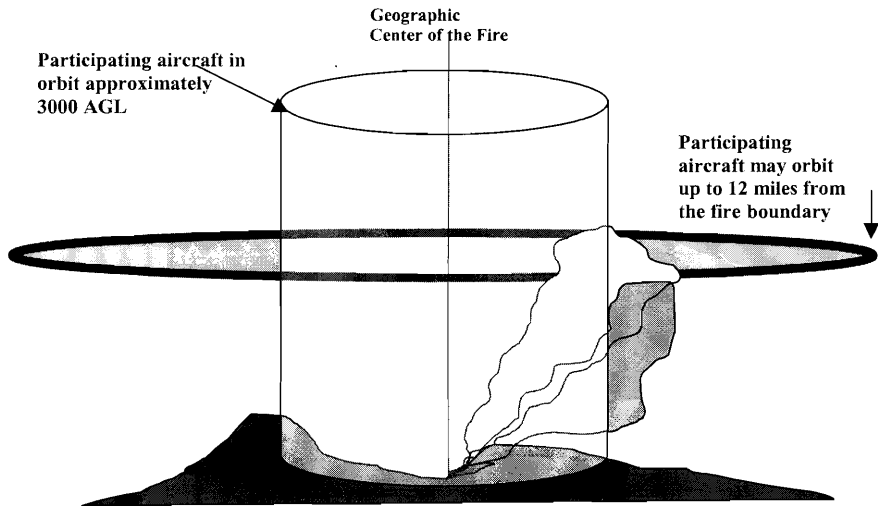FIREFIGHTING TRAFFIC AREAS

Pilots are advised to stay clear of Firefighting Traffic Areas. Remain 15 miles from the area of activity. If you must over-fly the area, do so at an altitude of 5000 feet AGL above. However, to remain safe and out of the way of working aircraft, it is best to circumnavigate the area.

The wild-land fire environment can be very complex and involve a large number and variety of aircraft types including fixed and rotary wing aircraft. Some of the aircraft are small single and multi-engine command and control platforms that can be especially difficult to see and may give the appearance that the fire is not staffed. The aircraft participating in firefighting can orbit as far out as 12 miles from the perimeter of the fire. Any intrusion by aircraft not directly involved in the firefighting operation could delay the delivery of much needed retardant or water to ground firefighters and will adversely affect the safety of participating aircraft. Please stay well away from wild-land fires even if you feel that aircraft are not working the fire; they may be en route or unseen.

If you see a fire developing along your route, report it immediately to air traffic control who will advise the US Forest Service. The firefighting community would welcome this information.

The following narratives summarize the FAR Part 93 Special Air Traffic Rules, and Airport Traffic Patterns in effect as prescribed in the rule. This information is advisory in nature and in no way relieves the pilot from compliance with the specific rules set forth in FAR Parts 91 and 93.

Special Airport Traffic Areas prescribed in Part 93 are depicted on Sectional Aeronautical Charts, World Aeronautical Charts, Enroute Low Altitude Charts, and where applicable, on VFR Terminal Area Charts.

OPERATIONS RESERVATIONS FOR HIGH DENSITY TRAFFIC AIRPORTS KENNEDY, LAGUARDIA, AND WASHINGTON REAGAN NATIONAL

The Federal Aviation Administration (FAA) has designated New York's Kennedy and LaGuardia Airports and Washington Reagan National Airport as High Density Traffic Airports (HDTA), Title 14, Code of Federal Regulations, part 93, subpart K, and has prescribed air traffic rules and requirements for operating aircraft (excluding helicopters) to and from those airports during certain hours.

Reservations are required for operations from 6 a.m. through 11:59 p.m. local time at LaGuardia Airport and Washington Reagan National Airport. Reservations at Kennedy Airport are required from 3 p.m. through 7:59 p.m. local time.

Reservation procedures are detailed in Advisory Circular 93-1, Reservations for Unscheduled Operations at High Density Traffic Airports. A copy of the advisory circular is available on the FAA website at <http://www.faa.gov>. Reservations for unscheduled operations are allocated through the Enhanced Computer Voice Reservation System (e-CVRS) accessible via telephone or the Internet. This system may not be used to make reservations for scheduled air carrier or commuter flights.

The toll-free telephone number for accessing e-CVRS is 1-800-875-9694 and is available for calls originating within the United States, Canada, and the Caribbean. Users outside the toll-free areas may access e-CVRS by calling the toll number of 703-707-0568. The Internet web address for accessing the e-CVRS is <http://www.fly.faa.gov/ecvrs>. If you have any questions about reservation requirements or are experiencing problems with the system, you may telephone the Airport Reservation Office at the Air Traffic Control System Command Center at (703) 904-4452.

Requests for instrument flight rules (IFR) reservations will be accepted beginning 72 hours prior to the proposed time of operation at the high-density airport. For example, a request for an 11 a.m. reservation on a Thursday will be accepted beginning at 11 a.m. on the previous Monday.

IFR reservations must be obtained prior to IFR landing or takeoff at an HDTA during slot controlled hours. An air traffic control (ATC) clearance does not constitute a reservation. A reservation does not constitute permission to operate at an HDTA if additional operational limits or procedures are required by NOTAM and/or regulation.

Aircraft involved in medical emergencies will be handled by ATC without regard to a reservation after obtaining prior approval of the ATC System Command Center on (703) 904-4452. ATC will accommodate declared other emergency situations without regard to slot reservations.

NOTE: Visual flight rule (VFR) reservations via ATC for unscheduled operations at LaGuardia are not authorized from 7 a.m. through 8:59 a.m. local time and 4 p.m. through 6:59 p.m. local time, Monday through Friday and Sunday evenings, unless otherwise announced by NOTAM. Both IFR and VFR operations during those time periods must obtain an advance reservation through e-CVRS.

**INTENTIONALLY
LEFT
BLANK**



FSS TELEPHONE NUMBERS

Flight Service Station (FSS) facilities provide flight planning and weather briefing services to pilots. FSS services in the contiguous United States, Hawaii and Puerto Rico, are provided by a network of large FSS facilities and a few select remote facilities some of which operate part-time. Because of the interconnectivity between the facilities, all FSS services including radio frequencies are available continuously using published data.

Telephone Information Briefing Service (TIBS) is a FSS service that provides continuous recordings of meteorological and/or aeronautical information. A touch-tone telephone is required to fully utilize this service.

Further information can be found in the Aeronautical Information Manual (AIM).

NATIONAL FSS TELEPHONE NUMBER

Pilot Weather Briefings 1-800-WX-BRIEF (1-800-992-7433)

OTHER FSS TELEPHONE NUMBERS (except in Alaska)

TIBS (see description above) 1-877-4TIBS-WX (1-877-484-2799)

Clearance Delivery Only 1-888-766-8267

Lifeguard Flights Only 1-877-LIF-GRD3 (1-877-543-4733)

Flights within DC SFRA & FRZ * 1-866-225-7410

* District of Columbia Special Flight Rules Area & Flight Restricted Zone

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

TAF KPIT 091730Z 091818 15005KT 5SM HZ.FEW020 WS010/31022KT
FM1930 30015G25KT 3SM SHRA OVC015 TEMPO 2022 1/2SM +TSRA
OVC008CB
FM0100 27008KT 5SM SHRA BKN020 OVC040 PROB40 0407 1SM -RA BR
FM1015 18005KT 6SM -SHRA OVC020 BECMG 1315 P6SM NSW SKC

METAR KPIT 091955Z COR 22015G25KT 3/4SM R28L/2600FT TSRA OVC010CB
18/16 A2992 RMK SLP045 T01820159

Forecast	Explanation	Report
TAF	Message type: <u>TAF</u> -routine or <u>TAF AMD</u> -amended forecast, <u>METAR</u> -hourly, <u>SPECI</u> -special or <u>TESTM</u> -non-commissioned ASOS report	METAR
KPIT	ICAO location indicator	KPIT
091730Z	Issuance time: ALL times in UTC " <u>Z</u> ", 2-digit date, 4-digit time	091955Z
091818	Valid period: 2-digit date, 2-digit beginning, 2-digit ending times In U.S. METAR : <u>COR</u> rected ob; or <u>AUTO</u> ated ob for automated report with no human intervention; omitted when observer logs on	COR
15005KT	Wind: 3 digit true-north direction, nearest 10 degrees (or <u>Varia</u> ble); next 2-3 digits for speed and unit, <u>KT</u> (KMH or MPS); as needed, <u>Gust</u> and maximum speed; 00000KT for calm; for METAR , if direction varies 60 degrees or more, <u>Variability</u> appended, e.g. 180 <u>V</u> 260	22015G25KT
5SM	Prevailing visibility: in U.S., <u>Statute Miles</u> & fractions; above 6 miles in <u>TAF</u> <u>Plus</u> 6SM. (Or, 4-digit minimum visibility in meters and as required, lowest value with direction)	3/4SM
HZ	Runway Visual Range: <u>R</u> ; 2-digit runway designator <u>Left</u> , <u>Center</u> , or <u>Right</u> as needed; <u>"I"</u> ; <u>Minus</u> or <u>Plus</u> in U.S., 4-digit value, <u>Feet</u> in U.S., (usually meters elsewhere); 4-digit value <u>Variability</u> 4-digit value (and tendency <u>Down</u> , <u>Up</u> or <u>No change</u>)	R28L/2600FT
FEW020	Significant present, forecast and recent weather: see table (on back) Cloud amount, height and type: <u>SKY</u> <u>Clear</u> 0/8, <u>FEW</u> >0/8-2/8, <u>SCa</u> tered 3/8-4/8, <u>BroKe</u> N 5/8-7/8, <u>Over</u> cast 8/8; 3-digit height in hundreds of ft; <u>Towering CU</u> mulus or <u>Cumulonim</u> Bus in METAR ; in TAF , only <u>CB</u> . <u>Vertical</u> <u>Visiblity</u> for obscured sky and height "VV004". More than 1 layer may be reported or forecast. In automated METAR reports only, <u>CLea</u> R for "clear below 12,000 feet" Temperature: degrees Celsius; first 2 digits, temperature <u>"I"</u> last 2 digits, dew-point temperature; <u>Minus</u> for below zero, e.g., M06 Altimeter setting: indicator and 4 digits; in U.S., <u>A</u> -inches and hundredths; (<u>Q</u> -hectoPascals, e.g., Q1013)	TSRA OVC010CB 18/16 A2992

KEY to AERODROME FORECAST (TAF) and AVIATION ROUTINE WEATHER REPORT (METAR)

Forecast	Explanation	Report
WS010/31022KT	In U.S. TAF , non-convective low-level ($\leq 2,000$ ft) <u>Wind Shear</u> ; 3-digit height (hundreds of ft); <u>"/";</u> 3-digit wind direction and 2-3 digit wind speed above the indicated height, and unit, <u>KT</u> In METAR , <u>ReMarK</u> indicator & remarks. For example: <u>Sea-Level</u> Pressure in hectoPascals & tenths, as shown: 1004.5 hPa; <u>Temp/</u> dew-point in tenths °C, as shown: temp. 18.2°C, dew-point 15.9°C	RMK SLP045 T01820159
FM1930	<u>FroM</u> and 2-digit hour and 2-digit minute beginning time: indicates significant change. Each FM starts on new line, indented 5 spaces.	
TEMPO 2022	<u>TEMPO</u> rary: changes expected for < 1 hour and in total, < half of 2-digit hour beginning and 2-digit hour ending time period	
PROB40 0407	<u>PROB</u> ability and 2-digit percent (30 or 40): probable condition during 2-digit hour beginning and 2-digit hour ending time period	
BECMG 1315	<u>BEC</u> oM <u>in</u> G: change expected during 2-digit hour beginning and 2-digit hour ending time period	

Table of Significant Present, Forecast and Recent Weather - Grouped in categories and used in the order listed below; or as needed in TAF, No Significant Weather.

QUALIFIER

Intensity or Proximity

- Light "no sign" Moderate + Heavy

VC Vicinity: but not at aerodrome; in U.S. **METAR**, between 5 and 10SM of the point(s) of observation; in U.S. **TAF**, 5 to 10SM from center of runway complex (elsewhere within 8000m)

Descriptor

MI Shallow	BC Patches	PR Partial	TS Thunderstorm
BL Blowing	SH Showers	DR Drifting	FZ Freezing

WEATHER PHENOMENA

Precipitation

DZ Drizzle	RA Rain	SN Snow	SG Snow grains
IC Ice crystals	PL Ice pellets	GR Hail	GS Small hail/snow pellets

UP Unknown precipitation in automated observations

Obscuration

BR Mist ($\geq 5/8$ SM)	FG Fog ($< 5/8$ SM)	FU Smoke	VA Volcanic ash
SA Sand	HZ Haze	PY Spray	DU Widespread dust

Other

SQ Squall	SS Sandstorm	DS Duststorm	PO Well developed dust/sand whirls
FC Funnel cloud	+FC tornado/waterspout		

- Explanations in parentheses "()" indicate different worldwide practices.
- Ceiling is not specified; defined as the lowest broken or overcast layer, or the vertical visibility.
- NWS **TAFs** exclude turbulence, icing & temperature forecasts; NWS **METARs** exclude trend fcsts
- Although not used in US, Ceiling And Visibility OK replaces visibility, weather and clouds if: visibility ≥ 10 km; no cloud below 5000 ft (1500 m) or below the highest minimum sector altitude, whichever is greater and no CB; and no precipitation, TS, DS, SS, MIFG, DRDU, DRSA or DRSN.

UNITED STATES DEPARTMENT OF COMMERCE

NOAA/PA 96052

National Oceanic and Atmospheric Administration—National Weather Service

KEY AIR TRAFFIC FACILITIES

Air Traffic Control System Command Center

Main Number.....703-904-4400

RGNL AIR TRAFFIC DIVISIONS

REGION	TELEPHONE
Alaskan	907-271-5464
Central	816-329-2500
Eastern	718-553-4502
Great Lakes	847-294-7202
New England	781-238-7500
Northwest Mountain	425-227-2500
Southern	404-305-5500
Southwest	817-222-5500
Western Pacific	310-725-6500

AIR ROUTE TRAFFIC CONTROL CENTERS (ARTCCs)

ARTCC NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Albuquerque	817-222-5006	7:30 a.m.-4:00 p.m.	505-856-4300
Anchorage	907-271-5936	7:30 a.m.-4:00 p.m.	907-269-1137
Atlanta	404-305-5180	7:30 a.m.-5:00 p.m.	770-210-7601
Boston	617-238-7001	7:30 a.m.-4:00 p.m.	603-879-6633
Chicago	847-294-8400	8:00 a.m.-4:00 p.m.	630-906-8221
Cleveland	847-294-8400	8:00 a.m.-4:00 p.m.	440-774-0310
Denver	425-227-1389	7:30 a.m.-4:00 p.m.	303-651-4100
Ft. Worth	817-222-5006	7:30 a.m.-4:00 p.m.	817-858-7300
Houston	817-222-5006	7:30 a.m.-4:00 p.m.	281-230-5300
Indianapolis	847-294-8400	8:00 a.m.-4:00 p.m.	317-247-2231
Jacksonville	404-305-5180	8:00 a.m.-4:30 p.m.	904-549-1501
Kansas City	816-329-3000	7:30 a.m.-4:00 p.m.	913-254-8500
Los Angeles	661-265-8200	7:30 a.m.-4:00 p.m.	661-265-8200
Memphis	404-305-5180	7:30 a.m.-4:00 p.m.	901-368-8103
Miami	404-305-5180	7:00 a.m.-3:30 p.m.	305-716-1500
Minneapolis	847-294-8400	8:00 a.m.-4:00 p.m.	651-463-5580
New York	718-995-5426	8:00 a.m.-4:40 p.m.	516-468-1001
Oakland	310-725-3300	6:30 a.m.-3:00 p.m.	510-745-3331
Salt Lake City	425-227-1389	7:30 a.m.-4:00 p.m.	801-320-2500
Seattle	425-227-1389	7:30 a.m.-4:00 p.m.	253-351-3500
Washington	718-995-5426	8:00 a.m.-4:30 p.m.	703-771-3401

MAJOR TERMINAL RADAR APPROACH CONTROLS (TRACONS)

TRACON NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Atlanta	404-305-5180	7:00 a.m.-3:30 p.m.	404-669-1200
Chicago	847-294-8400	8:00 a.m.-4:00 p.m.	847-608-5509
Dallas/Ft. Worth	817-222-5006	7:30 a.m.-4:00 p.m.	972-615-2500
Denver	425-227-1389	7:30 a.m.-4:00 p.m.	303-342-1500
Houston	817-222-5006	7:30 a.m.-4:00 p.m.	281-230-8400
New York	718-995-5426	8:00 a.m.-4:30 p.m.	516-683-2901
Northern CA	310-725-3300	7:00 a.m.-3:30 p.m.	916-366-4001
Potomac	718-995-5426	8:00 a.m.-4:30 p.m.	540-349-7500
Southern CA	310-725-3300	7:30 a.m.-4:00 p.m.	858-537-5800

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

KEY AIR TRAFFIC FACILITIES

DAILY NAS REPORTABLE AIRPORTS

AIRPORT NAME	*24 HR RGNL DUTY OFFICE TELEPHONE #	BUSINESS HOURS	BUSINESS TELEPHONE #
Albuquerque Intl Sunport, NM	817-222-5006	8:00 a.m.-5:00 p.m.	505-842-4366
Andrews AFB, MD	718-995-5426	8:00 a.m.-4:30 p.m.	301-735-2380
Baltimore/Washington Intl Thurgood Marshall, MD	718-995-5426	8:00 a.m.-4:30 p.m.	410-962-3555
Boston Logan Intl, MA	781-238-7001	7:30 a.m.-4:00 p.m.	617-455-3100
Bradley Intl, CT	617-238-7001	7:30 a.m.-4:00 p.m.	203-627-3428
Burbank/Bob Hope, CA	310-725-3300	7:00 a.m.-5:30 p.m.	818-567-4806
Charlotte Douglas Intl, NC	404-305-5180	8:00 a.m.-4:30 p.m.	704-344-6487
Chicago Midway, IL	847-294-8400	8:00 a.m.-4:00 p.m.	773-884-3670
Chicago O'Hare Intl, IL	847-294-8400	8:00 a.m.-4:00 p.m.	773-601-7600
Cleveland Hopkins Intl, OH	847-294-8400	8:00 a.m.-4:00 p.m.	216-898-2020
Covington/Cincinnati, OH	708-294-7401	8:00 a.m.-4:30 p.m.	606-767-1006
Dallas/Ft. Worth Intl, TX	817-222-5006	8:30 a.m.-5:00 p.m.	972-615-2531
Dayton Cox Intl, OH	847-294-8400	7:30 a.m.-4:00 p.m.	937-454-7300
Denver Intl, CO	425-227-1389	7:30 a.m.-4:00 p.m.	303-342-1600
Detroit Metro, MI	847-294-8400	8:00 a.m.-4:00 p.m.	734-955-5000
Fairbanks Intl, AK	907-271-5936	7:30 a.m.-4:00 p.m.	907-474-0050
Fort Lauderdale Intl, FL	404-305-5180	7:00 a.m.-3:30 p.m.	305-356-7932
George Bush Intercontinental/Houston, TX	817-222-5006	7:30 a.m.-4:00 p.m.	713-230-8400
Hartsfield-Jackson Atlanta Intl, GA	404-305-5180	7:00 a.m.-3:30 p.m.	404-669-1200
Honolulu Intl, HI	310-643-3200	7:30 a.m.-4:00 p.m.	808-840-6100
Houston Hobby, TX	817-222-5006	8:00 a.m.-5:00 p.m.	713-847-1400
Indianapolis Intl, IN	847-294-8400	8:00 a.m.-4:00 p.m.	317-484-6600
Kahului/Maui, HI	310-643-3200	7:30 a.m.-4:00 p.m.	808-877-0725
Kansas City Intl, MO	816-329-3000	7:30 a.m.-4:00 p.m.	816-329-2700
Las Vegas McCarran, NV	310-725-3300	7:30 a.m.-4:00 p.m.	702-262-5978
Los Angeles Intl, CA	310-725-3300	7:00 a.m.-3:30 p.m.	310-342-4900
Louis Armstrong New Orleans Intl, LA	817-222-5006	7:00 a.m.-4:30 p.m.	504-471-4300
Memphis Intl, TN	404-305-5180	7:30 a.m.-4:00 p.m.	901-322-3350
Miami Intl, FL	404-305-5180	7:00 a.m.-4:00 p.m.	305-869-5400
Minneapolis/St. Paul, MN	847-294-8400	8:00 a.m.-4:00 p.m.	612-713-4000
Nashville Intl, TN	404-305-5180	7:00 a.m.-3:30 p.m.	615-781-5460
New York Kennedy Intl, NY	718-995-5426	8:00 a.m.-4:30 p.m.	718-656-0335
New York La Guardia, NY	718-995-5426	8:00 a.m.-4:30 p.m.	718-335-5461
Newark Liberty Intl, NJ	718-995-5426	7:30 a.m.-4:00 p.m.	973-565-5000
Norman Y. Mineta San Jose Intl, CA	310-643-3200	7:30 a.m.-4:00 p.m.	408-982-0750
Ontario Intl, CA	310-643-3200	7:30 a.m.-4:00 p.m.	909-983-7518
Orlando Intl, FL	404-305-5180	7:30 a.m.-5:00 p.m.	407-850-7000
Philadelphia Intl, PA	718-995-5426	8:00 a.m.-4:30 p.m.	215-492-4100
Phoenix Sky Harbor Intl, AZ	310-643-3200	7:30 a.m.-4:00 p.m.	602-379-4226
Pittsburgh Intl, PA	718-995-5426	8:00 a.m.-4:30 p.m.	412-269-9237
Portland Intl, OR	425-227-1389	7:30 a.m.-4:00 p.m.	503-493-7500
Raleigh-Durham, NC	404-305-5180	8:00 a.m.-4:30 p.m.	919-840-5544
Ronald Reagan Washington National, DC	718-995-5426	8:00 a.m.-4:30 p.m.	703-413-1535
Salt Lake City, UT	425-227-1389	7:30 a.m.-4:00 p.m.	801-325-9600
San Antonio Intl, TX	817-222-5006	8:00 a.m.-4:30 p.m.	210-805-5507
San Diego Lindbergh Intl, CA	310-725-3300	8:00 a.m.-4:30 p.m.	619-299-0677
San Francisco Intl, CA	310-643-3200	7:00 a.m.-3:30 p.m.	650-876-2883
San Juan Intl, PR	404-305-5180	7:30 a.m.-5:00 p.m.	809-253-8663
Seattle-Tacoma Intl, WA	425-227-1389	7:30 a.m.-4:00 p.m.	206-768-2900
St. Louis Lambert, MO	816-329-3000	7:30 a.m.-4:00 p.m.	314-890-1000
Tampa Intl, FL	404-305-5180	7:30 a.m.-4:00 p.m.	813-371-7700
Ted Stevens Anchorage Intl, AK	907-271-5936	7:30 a.m.-4:00 p.m.	907-271-2700
Teterboro, NJ	718-995-5426	8:00 a.m.-4:30 p.m.	201-288-1889
Washington Dulles Intl, DC	718-995-5426	8:00 a.m.-4:30 p.m.	703-661-6031
West Palm Beach, FL	404-305-5180	8:00 a.m.-4:30 p.m.	561-683-1867
Westchester Co, NY	718-995-5426	8:00 a.m.-4:30 p.m.	914-948-6520

*Facilities can be contacted through the Rgnl Duty Officer during non-business hours.

Air Route Traffic Control Center frequencies and their remoted transmitter sites are listed below for the coverage of this volume. Bold face type indicates high altitude frequencies, light face type indicates low altitude frequencies. To insure unrestricted IFR operations within the high altitude enroute sectors, the use of 720 channel communications equipment (25 kHz channel spacing) is required.

®CHICAGO CENTERH-2-5-10, L-12-27-28-31, A-1
(KZAU)

Burlington - 135.6
 Cedar Rapids - 132.8
 Des Moines - 127.05
 Dubuque - 133.95 **127.775** **125.225**
 Moline - **135.825** 118.75
 Ottumwa - 118.15
 Washington - **134.325** **133.35** **125.575**

®DENVER CENTER - 124.8H-1-2-3-4-5-6, L-8-9-10-11-12-13-14-15
(KZDV)

Ainsworth - 132.7 127.95
 Cheyenne - 125.9
 Colby - **132.175** **127.65**
 Crawford - **135.025** 127.95
 Goodland - 132.5
 Grand Island West - 132.7
 Hayes Center - **127.025**
 Hill City - 132.5
 North Platte - 132.7 **124.225**
 Ogallala - 132.7 **126.325**
 O'Neill - **135.025** 132.7
 Rapid City - 127.95
 Scottsbluff - 127.95
 Sterling - 118.475

®KANSAS CITY CENTER - 132.325H-5-6, L-10-15-16-27, A-2
(KZKC)

Anthony - **133.2** 118.35
 Butler - 125.55
 Chanute - 132.9
 Chillicothe - 125.25
 Columbia - **134.5** 134.5 **119.475** 118.4
 Dodge City - **120.725**
 Edna - 128.6 **118.125**
 Emporia - **132.25** 127.725 **124.975** 120.2
 Farmington - **132.65** **120.825** 127.475
 Garden City - **133.45** 125.2
 Hallsville - **126.975**
 Hutchinson - **134.3** **132.825** 118.8
 Independence - **121.65**
 Kansas City - **127.125**
 Kirksville - **134.625** **133.725** 132.6
 Liberal - **134.675** 134.0
 Manhattan - 127.35
 Maples - 128.35
 Richland - 128.35 **125.675** 124.1
 Russell - 124.4
 St. Charles - 125.9
 St. Joseph - 127.9
 St. Louis - **133.15** 128.35
 Salina - 134.9 **125.175**
 Springfield - **133.475** 127.5
 Topeka - **134.725** **125.425** 123.8

®MEMPHIS CENTERH-5-6-9, L-15-16-17-18-22-25-26
(KZME)

Malden - 134.65

® MINNEAPOLIS CENTER – 134.45 125.5 120.3

H-2-5-10-11, L-10-12-13-14-27-28-31

(KZMP)

Aberdeen – 120.6

Alexandria – **133.4** 126.1

Bemidji – 134.75

Bismark – 125.6 **125.6**

Brainerd – 118.05

Darwin – 125.5

Des Moines – **135.775 118.825** 125.65

Dickinson – 124.25

Duluth – **134.55** 134.55 127.9

Dupree – 126.8

Fairmont – 127.75

 Fargo – **127.35**

Farmington – 133.7

Ft. Dodge – 134.0

Grand Forks – **132.15**

Grand Island – 126.05

Green Bay – 125.55

Hastings – **135.1** 119.4Huron – **126.25**

International Falls – 120.9

Iron Mountain – 133.45 121.25

Jamestown – 126.8 **124.2**La Crosse – 128.6 **118.85**Lincoln – **119.525**

Mankato – 135.0

Marysville – **134.225** 126.4Mason City – **134.25** 127.3Minot – **127.6** 127.6 118.9

Mosinee – 124.4

Omaha – **132.725** 128.75 119.6O'Neill – 128.0 **124.875**Pierre – **128.425** 125.1

Princeton – 121.05

Redwood Falls – **133.075** 127.1 **119.875**

Rochester – 132.35

Roseau – 134.75

Sioux City – **119.725** 124.1

Sioux Falls – 132.05

Traverse City – 338.3

Watertown – 128.5

White Cloud – **132.55** 120.85**® SALT LAKE CITY CENTER**

H-1-2-3, L-9-11-12-13-14

(KZLC)

Watford City – **126.85** 126.85

VHF frequencies available at Flight Service Stations and at their remote communication outlets (RCO's) are listed below for the coverage of this volume. Frequencies in bold type are available all altitudes but recommended for use FL180 and above. "T" indicates transmit only and "R" indicates receive only. RCO's available at NAVAID's are listed after the NAVAID name. RCO's not at NAVAID's are listed by name.

COLUMBIA AFSS

BUTLER VORTAC 115.9T 122.1R
 CHILLICOTHE RCO 122.25
 CLINTON RCO 122.4
 COLUMBIA RCO 119.3 122.2 122.65
 DOGWOOD VORTAC 109.4T 122.1R
 DOWNTOWN RCO **122.6**
 HALLSVILLE VORTAC 114.2T 122.1R
 JEFFERSON CITY RCO 122.25
 JOHNSON COUNTY RCO 122.15
 JOPLIN RCO 122.6
 KANSAS CITY VORTAC 113.25T 122.1R 122.65
 KIRKSVILLE VORTAC 114.6T 122.1R 122.2
 LEBANON RCO 122.5
 MACON VOR/DME 112.9T 122.1R
 MAPLES VORTAC 113.4T 122.1R
 NEOSHO VOR/DME 117.3 122.1R
 POINT LOOKOUT RCO 122.65
 ST JOSEPH VORTAC 115.5T 122.1R 122.3
 SEDALIA RCO 122.05
 SPRINGFIELD VORTAC 116.9T 122.1R **122.55**
 SUNSHINE RCO 122.15
 VICHY VOR/DME 117.7T 122.1R 122.35
 WEST PLAINS RCO 122.15

COLUMBUS AFSS

AINSWORTH RCO 122.4
 ALLIANCE RCO 122.3
 BEATRICE RCO 122.5
 CENTRAL NEBRASKA RCO 122.45
 CHADRON VOR/DME 113.4T 122.1R 122.5
 COLUMBUS RCO 122.2 122.4
 HASTINGS VOR/DME 108.8T 122.1R
 HAYES CENTER VORTAC 117.7T 122.1R
 KEARNEY RCO 122.55
 LEE BIRD RCO **122.5**
 LINCOLN RCO **122.65**
 MC COOK RCO **122.6**
 NORFOLK VOR/DME 109.6T 122.15
 OMAHA RCO **122.35**
 O'NEILL RCO 122.45
 PAWNEE CITY VORTAC 112.4T 122.1R
 SCOTTSBLUFF VORTAC 112.6T 122.1R **122.6**
 SIDNEY VORTAC 115.9T 122.1R **122.45**
 THEDFORD RCO 122.4
 WOLBACH VORTAC 114.8T 122.1R

FORT DODGE AFSS

BURLINGTON RCO 122.65
CEDAR RAPIDS RCO 122.55
CHARLES CITY RCO 122.4
DAVENPORT RCO 122.5
DENISON RCO 122.25
DES MOINES RCO 122.65
DUBUQUE RCO 122.05
FORT DODGE RCO 122.2 122.3
GRINNELL RCO **122.35**
IOWA CITY VORTAC 116.2T 122.1R 122.25
LAMONI VORTAC 116.7T 122.1R
MASON CITY RCO 122.6
NEWTON VOR/DME 112.5T 122.1R
OMAHA VORTAC 116.3T 122.1R
OTTUMWA RCO 122.4
SIOUX CITY VORTAC 116.5T 122.1R 122.45
SPENCER RCO 122.15
WATERLOO RCO 122.05
WAUKON VORTAC 116.6T 122.1R

GRAND FORKS AFSS

BISMARCK RCO 122.2
BOWMAN RCO 122.4
DEVILS LAKE RCO 122.3
DICKINSON RCO 122.2
FARGO RCO 122.425
GRAND FORKS RCO 122.2 **122.6**
GRAND FORKS VOR/DME 114.3T
HAZEN RCO 122.45
JAMESTOWN VOR/DME 114.5T 122.2 123.6
MINOT RCO 122.2
ROLLA RCO 122.65
WILLISTON RCO **123.6**

GREEN BAY AFSS 122.2 122.55

RED WING RCO 122.6

HURON AFSS

ABERDEEN VOR/DME 113.0T 122.1R 122.4
BROOKINGS RCO 122.65
BUFFALO RCO 122.15
DUPREE RCO 122.6
HURON VORTAC 117.6T 122.1R 122.2 122.6 123.6
MITCHELL RCO 122.3
MOBRIDGE RCO 122.35
PHILIP RCO 122.4
PIERRE RCO 122.2
RAPID CITY VORTAC 112.3T 122.1R 122.65
SIOUX FALLS RCO 122.2
SPEARFISH RCO 122.55
WATERTOWN RCO 122.5
WINNER VOR 112.8T 122.1R
YANKTON RCO 122.55

PRINCETON AFSS

ALBERT LEA RCO 122.05
ALEXANDRIA RCO 122.6
ANOKA COUNTY RCO 122.55
AUSTIN RCO 122.5
BAUDETTE RCO 122.4
BEMIDJI RCO 123.6
BRAINERD RCO 123.65
CRANE LAKE RCO 122.2
DARWIN VORTAC 109.0T 122.1R
DETROIT LAKES RCO 122.5
DULUTH RCO 122.35
ELY VOR/DME 109.6T 122.1R
EVELETH RCO 122.45
FAIRMONT VOR/DME 110.2T 123.6R
FARMINGTON VORTAC 115.7T 122.1R
FERGUS FALLS RCO 122.35
GRAND MARAIS RCO 122.3
GRAND RAPIDS RCO 122.05
HIBBING RCO 122.6
HUMBOLDT VORTAC 112.4T 122.1R
INTL FALLS RCO 123.6
MADISON RCO 122.3
MANKATO VOR/DME 110.8T 122.1R
MARSHALL RCO 122.35
MINNEAPOLIS RCO 122.3
MONTEVIDEO RCO 122.45
MORA RCO 122.4
MORRIS RCO 122.25
NODINE VORTAC 117.9T 122.1R
OWATONNA RCO 122.25
PARK RAPIDS VOR/DME 110.6T 122.1R
PRINCETON RCO 122.2
REDWOOD FALLS RCO 122.4
THIEF RIVER FALLS VOR/DME 108.4T 122.1R 123.6R
ROCHESTER RCO 122.45
ROSEAU RCO 122.25
ST CLOUD RCO 122.5
WARROAD RCO 122.55
WILLMAR RCO 122.15
WINONA RCO 122.15
WORTHINGTON VOR/DME 110.6T 122.1R 123.6R

SAINT LOUIS AFSS

BIBLE GROVE VORTAC 109.0T 122.05R
CAPE GIRARDEAU VOR/DME 112.9T 122.1R **122.4**
CAPITAL VORTAC 112.7T 122.1R 122.25
CENTRALIA VORTAC 115.0T 122.1R
CHAMPAIGN (URBANA) RCO 122.45
DECATUR RCO 122.3
FARMINGTON VORTAC 115.7T 122.1R 122.3
FORISTELL VORTAC 110.8T 122.1R
MALDEN VORTAC 111.2T 122.1R
MARION VOR/DME 110.4T 122.1R
MATTOON VOR/DME 109.4T 123.6R
QUINCY VORTAC 113.6T 122.1R 122.5
ST LOUIS VORTAC 117.4T 122.1R 122.2 122.6 122.45
ST LOUIS RGNL RCO 122.45 122.6
SAMSVILLE VOR/DME 116.6T 122.1R
SPINNER RCO 122.25
SPIRIT of ST LOUIS RCO 122.2 124.75
VANDALIA VORTAC 114.3T 122.1R

WICHITA AFSS

ANTHONY VORTAC 112.9T 122.1R
CHANUTE RCO 122.35
DODGE CITY RCO 122.35
EMPORIA RCO 122.3
FT LEAVENWORTH RCO 122.35
GARDEN CITY RCO 122.45
GOODLAND RCO 122.4
GREAT BEND RCO 122.5
HAYS RCO 122.3
HILL CITY RCO **122.65**
HUTCHINSON RCO 122.05
LIBERAL RCO 122.4
MANHATTAN RCO **122.65**
MANKATO VORTAC 109.8T 122.1R
MC PHERSON RCO 122.15
OSWEGO VORTAC 117.6T 122.1R
PARSONS RCO 122.35
RUSSELL RCO 122.6
SALINA RCO 122.4
STROTHER RCO 122.5
TOPEKA RCO 122.45
ULYSSES RCO 122.3
WICHITA RCO 122.2 **122.65**

FLIGHT STANDARDS DISTRICT OFFICES (FSDO)

Below is a list of FSDO's in the area of coverage of this directory. These offices serve the aviation industry and the general public on matters relating to certification and operation of general aviation aircraft. Address letters to Manager, Flight Standards District Office—Federal Aviation Administration.

IOWA

Des Moines FSDO
3753 Convenience Blvd
Ankeny, IA 50021
Telephone: 515-289-3840

KANSAS

Wichita FSDO
1801 Airport Road
Wichita, KS 67209
Telephone: 316-941-1200

MINNESOTA

Minneapolis FSDO
6020 28TH Ave. South, Room 201
Minneapolis, MN 55450
Telephone: 612-713-4211

MISSOURI

Kansas City FSDO
901 Locust, Room 403
Kansas City, MO 64106
Telephone: 816-329-4000

St. Louis FSDO
10801 Pear Tree Lane
St. Ann, MO 63074
Telephone: 314-429-1006

NEBRASKA

Lincoln FSDO
3431 Aviation Rd, Suite 120
Lincoln, NE 68524
Telephone: 402-475-1738

NORTH DAKOTA

Fargo FSDO
4620 Amber Valley Pkwy
Fargo, ND 58104
Telephone: 701 277-1245

SOUTH DAKOTA

Rapid City FSDO
909 St. Joseph Street
Suite 700
Rapid City, SD 57701
Telephone: 605-737-3050

PREFERRED IFR ROUTES

A system of preferred routes has been established to guide pilots in planning their route of flight, to minimize route changes during the operational phase of flight, and to aid in the efficient orderly management of the air traffic using federal airways. The preferred IFR routes which follow are designed to serve the needs of airspace users and to provide for a systematic flow of air traffic in the major terminal and en route flight environments. Cooperation by all pilots in filing preferred routes will result in fewer traffic delays and will better provide for efficient departure, en route and arrival air traffic service.

The following lists contain preferred IFR routes for the low altitude stratum and the high altitude stratum. The high altitude list is in two sections; the first section showing terminal to terminal routes and the second section showing single direction route segments. Also, on some high altitude routes low altitude airways are included as transition routes.

The following will explain the terms/abbreviations used in the listing:

1. Preferred routes beginning/ending with an airway number indicate that the airway essentially overlies the airport and flights are normally cleared directly on the airway.
2. Preferred IFR routes beginning/ending with a fix indicate that aircraft may be routed to/from these fixes via a Standard Instrument Departure (SID) route, radar vectors (RV), or a Standard Terminal Arrival Route (STAR).
3. Preferred IFR routes for major terminals selected are listed alphabetically under the name of the departure airport. Where several airports are in proximity they are listed under the principal airport and categorized as a metropolitan area; e.g., New York Metro Area.
4. Preferred IFR routes used in one direction only for selected segments, irrespective of point of departure or destination, are listed numerically showing the segment fixes and the direction and times effective.
5. Where more than one route is listed the routes have equal priority for use.
6. Official location identifiers are used in the route description for VOR/VORTAC nav aids.
7. Intersection names are spelled out.
8. Navaid radial and distance fixes (e.g., ARD201113) have been used in the route description in an expediency and intersection names will be assigned as soon as routine processing can be accomplished. Navaid radial (no distance stated) may be used to describe a route to intercept a specified airway (e.g., MIV MIV101 V39); another navaid radial (e.g., UIM UIM255 GSW081); or an intersection (e.g., GSW081 FITCH).
9. Where two nav aids, an intersection and a nav aid, a nav aid and a navaid radial and distance point, or any navigable combination of these route descriptions follow in succession, the route is direct.
10. The effective times for the routes are in UTC. During periods of daylight saving time effective times will be one hour earlier than indicated. All states observe daylight saving time except Arizona, Puerto Rico and the Virgin Islands. Pilots planning flight between the terminals or route segments listed should file for the appropriate preferred IFR route.
11. (90–170 incl) altitude flight level assignment in hundred of feet.
12. The notations "pressurized" and "unpressurized" for certain low altitude preferred routes to Kennedy Airport indicate the preferred route based on aircraft performance.
13. High Altitude Preferred IFR Routes are in effect during the following time periods unless otherwise noted.
 Sun 1300–2259 local time.
 Mon thru Fri 0701–2259 local time.
 Sat 0701–1459 local time.
14. Use current SIDs and STARs for flight planning.
15. For high altitude routes, the portion of the routes contained in brackets [] is suggested but optional. The portion of the route outside the brackets will likely be required by the facilities involved.

LOW ALTITUDE

Terminals	Route	Effective Times (UTC)
DES MOINES (DSM)		
Memphis (MEM).....	V175 MAW	0000–2359
KANSAS CITY METRO AREA		
Chicago Midway (MDW).....	PIA MOTIF–STAR	0000–2359
Chicago O'Hare (ORD).....	EXCEL V116 PIA V262 BDF V10 PLANO	
Indianapolis (IND)	EXCEL V116 UIN V50	0000–2359
Louisville (SDF)	ANX V12 COU V44 HODGS V175 VIH V178 FAM	
	V190 PXV V4	0000–2359
	or	
	ANX V159 AUGIE V234 VIH V178 FAM V190 PXV	
	V4	0000–2359
St. Louis (STL).....	LAKES–DP COU TRAKE TRAKE–STAR.....	0000–2359
Terre Haute (HUF).....	EXCEL V116 UIN V50	0000–2359
MINNEAPOLIS METRO AREA		
Chicago Midway (MDW).....	V2 LNR V171 RFD V128 V8 JOT	0000–2359
Chicago O'Hare (ORD).....	V2 V97 KRENA	0000–2359
ST. LOUIS METRO AREA		
Chicago Midway (MDW).....	CARDS–DP SPI V9 PNT V69 JOT	0000–2359

Terminals	Route	Effective Times (UTC)
Chicago O'Hare (ORD).....	(at or blo 170) CARDS-DP SPI V9 PNT V227 PLANO	0000-2359
Cleveland (CLE).....	(non-turbojets) TURBO-DP DEC VHP V14 MIE V210 ROD ZABER-STAR	
Columbus (CMH)	TOY V12 J134 GBEE CVG V5 JOGER	
Indianapolis (IND)	(Turbojets) GATWY-DP VHP	
	or	
Kansas City (MCI).....	(Non-turbojets) TURBO-DP DEC VHP	0000-2359
SPRINGFIELD (SGF)	OZARK-DP MCM BQS-STAR	
Indianapolis (IND)	V190 FAM V72 BIB V12 KELLY	
	or	
Springfield (SPI)	V190 PXV V11	0000-2359
Terre Haute (HUF).....	V63 UIN V50 SPI	0000-2359
	V190 PXV V7	0000-2359
WICHITA (ICT)		
Indianapolis (IND)	V12 EMP V234 ENL V72 BIB V12 KELLY	0000-2359
Louisville (IIU).....	V350 CNU V132 SGF V190 PXV V4	0000-2359
Terre Haute (HUF).....	V12 EMP V234 ENL V72 BIB	0000-2359

HIGH ALTITUDE

Terminals	Route	Effective Times (UTC)
KANSAS CITY (MCI)		
Baltimore (BWI).....	LAKES-DP COU STL J24 VHP ROD J152 J162 MGW EMI-STAR	0000-2359
Chicago O'Hare (ORD).....	ROYAL-DP JTHRO IRK BDF BDF-STAR	
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	OBK CRL HIMEZ-STAR.....	
Dallas/Fort Worth (DFW)	RACER TUL UKW	
Detroit Metro-Wayne (DTW).....	MKG POLAR-STAR.....	1100-0400
Kennedy (JFK).....	LAKES-DP COU STL J24 VHP ROD J29 JHW J70 LVZ LENDY-STAR	
La Guardia (LGA)	ROYAL-DP JTHRO IRK BDF JOT J146 ETG MIP-STAR	
Milwaukee (MKE)	ROYAL-DP JTHRO IRK BDF JOT VEENA-STAR	
Newark (EWR).....	ROYAL-DP JTHRO IRK BDF JOT J146 GIJ J554 CRL J584 SLT FQM-STAR	
Washington Dulles (IAD).....	LAKES-DP COU STL J24 VHP J80 J30 BUCKO JASEN-STAR	
	or	
	LAKES-DP COU STL J24 VHP J80 AIR MGW MGW 121 VERNI ESL ROYL-STAR.....	
	or	
	(GPS or DME/DME IRU equipped)	
	or	
	LAKES-DP COU STL J24 VHP J80 AIR MGW VERNI ESL SHNON (RNAV)-STAR	
Washington Natl (DCA).....	LAKES-DP COU STL J24 VHP J80 J30 BUCKO BUCKO-STAR	
	or	0700-2359
	LAKES-DP COU STL J24 VHP J80 J30 SHAAR WZRRD-STAR	
	or	
	LAKES-DP COU STL J24 VHP J80 J30 SHAAR ELDEE (RNAV)-STAR.....	
LINCOLN (LNK)		
Chicago O'Hare (ORD).....	FOD DBQ JVL-STAR	1100-0400
MINNEAPOLIS (MSP)		
Atlanta (ATL).....	ZMBRO-DP ODI J30 BRIBE BDF ENL ENL162 PLESS TINGS J45 BNA RMG-STAR	
	or	

PREFERRED IFR ROUTES

375

Terminals	Route	Effective Times (UTC)
	(RNAV only) ZMBRO-DP ODI J30 BRIBE ENL ENL162 PLESS TINGS J45 BNA ERLIN (RNAV)-STAR.....	1100-0400
Baltimore (BWI)	DLL J34 AIR J162 MGW EMI-STAR	
Chicago Midway (MDW)	DBQ CVA MOTIF-STAR	1100-0400
Chicago O'Hare (ORD)	RST JVL-STAR	0000-2359
Cleveland Metro Area (CLE) (CGF) (BKL) (LNN) (LPR)	COULT-DP DLL J34 GRR HIMEZ-STAR	
Dallas/Fort Worth (DFW)	J21 IRW UKW	
Denver (DEN)	FSD J114 SNY LANDR-STAR	
Detroit Metro Area (PTK), (YIP), (ARB) (DET), (CYQG)	DLL BAE MKG LAN SPRTN-STAR	
Fort Lauderdale (FLL)	ROCHESTER-DP ALO J233 J45 STL J45 BNA J73 SZW J43 PIE FORTL-STAR	
	or (DME/DME-IRU or GPS) MSP ROCHESTER-DP ALO J233 J45 STL J45 BNA J73 SZW JINGL (RNAV)-STAR	
Fort Myers (RSW)	(DME/DME-IRU or GPS) ODI J30 BRIBE BDF ENL ENL162 PLESS J45 BNA J73 SZW TYNEE (RNAV)-STAR	1100-0300
Kansas City (MKC)	FOD RBA-STAR	
Kennedy (JFK)	DLL BAE J70 JHW J70 LVZ LENDY-STAR	0000-2359
La Guardia (LGA)	DLL BAE J34 J146 ETG MIP-STAR	
Madison (MSN)	ODI MSN	0700-2359
Marco Island (MKY)	(DME/DME/IRU or GPS) ODI J30 BRIBE BDF ENL ENL162 PLESS J45 BNA J73 SZW PIKKR (RNAV)-STAR	
Memphis (MEM)	ALO J233 STL J35 FAM GQE-STAR	
Miami (MIA)	ROCHESTER-DP ALO J233 J45 STL J45 BNA J73 SZW J43 PIE CYY-STAR	
	or (/E, /G, /R, /J, /L, /Q) MSP ROCHESTER-DP ALO J233 J45 STL J45 BNA J73 SZW J43 PIE DEEDS (RNAV)-STAR	
Milwaukee (MKE)	ODI MSN V2 WAITS	0700-2359
Myrtle Beach (MYR)	EARND ELANR EMMLY ERECO IIIU RYANS	
Naples (APF)	(GPS required) ODI J30 BRIBE BDF ENL ENL162 PLESS J45 BNA J73 SZW PIKKR (RNAV)-STAR .	
Nashville (BNA)	ODI J30 BRIBE BDF ENL ENL162 PLESS J45	1100-0400
Newark (EWR)	DLL BAE J34 CRL J584 SLT FQM-STAR	
Oakland (OAK)	ABR J32 MLD J158 MVA ECA	
Orlando (ORL) (MCO)	ODI J30 BRIBE BDF ENL ENL162 PLESS J45 ATL J89 OTK LEESE-STAR	1100-0400
	or (GPS or DME/DME-IRU equipped) ODI J30 BRIBE BDF ENL ENL162 PLESS J45 ATL J89 OTK PIGLT (RNAV)-STAR	1100-0400
Palm Beach (PBI)	(GPS or DME/DME-IRU equipped) ROCHESTER-DP ALO J233 J45 STL J45 BNA J73 SZW WLACE	
Philadelphia (PHL)	COULT-DP DLL BAE J34 CRL CXR EWC JST BUNTS-STAR	
Phoenix (PHX)	ONL LBF PUB ALS J102 ZUN FOSSL-STAR	
Pottstown (PTW)	COULT-DP DLL BAE J34 CRL CXR EWC JST RST ALO J233 CNOTA RIVRS-STAR	
St. Louis (STL)	ABR J158 DDY J202 OCS OGD	
Salt Lake City (SLC)	ABR J32 FMG ILA PYE	
San Francisco (SFO)	ODI J30 BRIBE BDF ENL ENL162 PLESS J45 BNA J73 SZW CLAMP-STAR	1100-0400
Sarasota/Bradenton (SRQ)	ODI J30 BRIBE BDF ENL ENL162 PLESS J45 BNA J73 SZW DARBS-STAR	1100-0400
Tampa (TPA)		

Terminals	Route	Effective Times (UTC)
Washington Natl (DCA).....	DLL J34 SHAAR WZRRD-STAR	
	or	
	DLL J34 SHAAR ELDEE (RNAV)-STAR	
Washington Dulles (IAD).....	DLL J34 AIR MGW MGW121 VERNI ESL	
	ROYIL-STAR	
	or	
	(GPS or DME/DME-IRU equipped) DLL J34 AIR	
	MGW VERNI SHNON (RNAV)-STAR	
West Palm Beach (PBI)	(GPS or DME/DME-IRU equipped)	
	ROCHESTER-DP ALO J233 J45 STL J45 BNA	
	J73 SZW CTY GULLO (RNAV)-STAR	
	or	
	ROCHESTER-DP ALO J233 J45 STL J45 BNA J73	
	SWZ CTY LLAKE-STAR	1100-0400
OMAHA (OMA)		
Chicago O'Hare (ORD).....	FOD DBQ JVL-STAR	0700-2359
ROCHESTER (RST)		
Chicago O'Hare (ORD).....	RST JVL-STAR	0000-2359
ST LOUIS (STL)		
Baltimore (BWI).....	GATWY-DP IIU J526 BKW J147 CSN	
	OTT-STAR	
Boca Raton (BCT).....	(DME/DME/IRU OR GPS) PLESS-DP BNA J73	
	SZW PRRIE (RNAV)-STAR	
Boston (BOS).....	GATWY-DP ROD J29 JHW J82 ALB GDM	
	GDM-STAR	
Chicago Midway (MDW)	CARDS-DP SPI MOTIF-STAR	1200-0400
Chicago O'Hare (ORD).....	CARDS-DP BDF BDF-STAR, ..	0000-2359
Cleveland Metro Area (CLE) (CGF) (BKL)		
(LNN) (LPR)	GATWY-DP JIGSY J134 JUDDI CVG ZABER-STAR ..	
	or	
	(turbojets) GATWY-DP JIGSY J134 JUDDI CVG	
	ZABER-STAR	
Columbus (CMH)	GATWY-DP ROD V210 GUNNE	
Dallas/Fort Worth (DFW)	LINDY-DP MAP RZC FSM BYP	
Detroit Metro Area (PTK), (YIP), (ARB)		
(DET), (CYQG)	GATWY-DP VHP FWA CRUXX-STAR	
	GATWY-DP VHP FWA V96 VVV VVV051 POOFE....	
Fort Lauderdale (FLL)	(all others) PLESS-DP BNA J73 SZW J43 PIE	
	FORTL-STAR.....	
	or	
	(DME/DME/IRU OR GPS) PLESS-DP BNA J73	
	SZW JINGL (RNAV)-STAR.....	
Fort Myers (FMY)	(DME/DME/IRU OR GPS TURBOJET)	
	LINDBERGH-DP MAW VUZ J39 MGM J41 SZW	
	TYNEE (RNAV)-STAR.....	
Houston George Bush Intcntl (IAH)	(Turbojets-GPS or DME/DME-IRU equipped)	
	LINDY-DP LIT J180 SWB TXMEX (RNAV)-STAR ..	
	or	
	(non-advanced NAV only) LINDY-DP LIT J180	
	SWB DAS-STAR	
Houston Hobby (HOU)	(GPS or DME/DME-IRU equipped) LINDY-DP LIT	
	J180 SWB ROKIT (RNAV)-STAR	
	or	
	(non-advanced NAV only) LINDY-DP LIT J180	
	SWB DAS-STAR	
La Guardia (LGA)	GATWY-DP ROD J29 J146 ETG MIP-STAR	
Miami (MIA)	(all others) PLESS-DP BNA J73 SZW J43 PIE	
	CYY-STAR	
	or	
	(DME/DME/IRU OR GPS TURBOJET) PLESS-DP	
	BNA J73 SZW SSCOT (RNAV)-STAR	
Orlando Executive (ORL)	PLESS-DP BNA J73 SZW OTK LEESE-STAR	
	or	
	(GPS or DME/DME-IRU equipped) PLESS BNA	
	J73 SZW OTK PIGLT (RNAV)-STAR	1100-0400

Terminals	Route	Effective Times (UTC)
Orlando Intl (MCO)	(GPS or DME/DME-IRU equipped) PLESS BNA J73 SZW OTK PIGLT (RNAV)-STAR	1000-0400
Tampa (TPA)	LINDY-DP MAW VUZ J41 SZW DARBS-STAR	1100-0400
Washington Dulles (IAD)	BLUES-DP IIU J526 BKW ROYIL-STAR	
	or	
Washington Natl (DCA)	BLUES-DP IIU J526 BKW SHNON (RNAV)-STAR ... GATWY-DP IIU J526 BKW WZRRD-STAR	
	or	
West Palm Beach (PBI)	GATWY-DP IIU J526 BKW ELDEE (RNAV)-STAR (DME/DME/IRU OR GPS) PLESS-DP BNA J73 SZW WLACE (RNAV)-STAR	

SPECIAL HIGH ALTITUDE DIRECTIONAL ROUTES

Terminals	Route	Effective Times (UTC)
Traffic overflying Kansas City VORTAC (MCI) to IAD:		
MCI	J24 IIU J8 HVQ ROYIL-STAR	
	or	
	J24 IIU J8 HVQ SHNON (RNAV)-STAR	
Traffic overflying Lamoni VORTAC (LMN) to IAD:		
LMN	(GPS or DME/DME-IRU equipped) J64 FWA APE AIR MGW VERNI ESL ROYIL-STAR	
	or	
	(GPS or DME/DME-IRU equipped) J64 FWA APE AIR MGW VERNI ESL SHNON (RNAV)-STAR	
Traffic overflying Saint Louis VORTAC (STL) to IAD:		
STL	IIU J8 HVQ ROYIL-STAR	
	or	
	IIU J8 HVQ SHNON (RNAV)-STAR	

Q-ROUTES

Q ROUTES REGULATORY

Q1, Q3, Q5, Q7, Q9 and Q11 are preferred single direction (Southbound) Q routes; flight planning Northbound not authorized.

Q routes are RNAV routes that require the use of GNSS or DME/DME/IRU RNAV, unless otherwise indicated. Please note that this section does not apply to Q routes in the Gulf of Mexico. Gulf of Mexico Q routes are explained in the Southeast and South Central A/FD volumes. Q routes listed in this A/FD volume have at least part of one of their leg segments within this volume's area of coverage.

GNSS and DME/DME/IRU RNAV operations are authorized along Q routes at FL 180 and above. GNSS and DME/DME/IRU RNAV MEAs will only be published if above FL 180.

DME facilities that have been assessed for RNAV operations are listed below. Q routes with no DME facilities listed are limited to GNSS RNAV operations only. Those routes will have an enroute chart note "GNSS REQUIRED".

Route	Segment	DME
Q1	ELMAA-ERAVE	BTG, OLM, HQM, HUH, UBG
	ERAVE-EASON	BTG, OLM, HQM, HUH, LTJ, CVO, DSD, OED, UBG, ONP, EUG
	EASON-EBINY	CVO, DSD, OED, BTG, UBG, ONP, EUG, LMT
	EBINY-ENVIE	CVO, OED, EUG, LMT, RBL, ENI, ONP, FJS
	ENVIE-ETCHY	OED, PYE, OAK, LIN, ECA, LMT, RBL, ENI, SAC, FJS
Q2	ETCHY-POINT REYES	LIN, ECA, RBL, ENI, SAC, OAK
	BOILE-HEDVI	HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR
	HEDVI-HOBOL	BZA, GBN, BLH, EED, PXR, IPL, TFD, DRK, TUS
	HOBOL-ITUCO	TFD, GBN, BLH, PXR, TUS, CIE, SSO
	ITUCO-NEWMAN	EWM, TFD, PXR, CIE, SSO, TUS, TCS
Q3	FEPOT-FAMUK	OLM, TOU, HQM, CVO, BTG, DSD, LTJ, UBG, ONP, EUG
	FAMUK-FRFLY	BTG, DSD, OED, CVO, EUG, ONP, UBG, RBL, LMT
	FRFLY-FINER	OED, EUG, RBL, LMT, ENI, CVO, FJS
	FINER-FOWND	OED, PYE, ECA, LIN, OAK, ENI, RBL, LMT, SAC, FJS
	FOWND-POINT REYES	LIN, ECA, PYE, RBL, SAC, ENI
Q4	BOILE-HEDVI	HEC, PDZ, OCN, PMD, LAX, RZS, IPL, TRM, PKE, BLH, EED, BZA, GBN, PXR
	HEDVI-SCOLE	EED, BLH, BZA, GBN, TRM, IPL, TFD
	SCOLE-SPTFR	EED, BLH, BZA, GBN, TRM, IPL, TFD
	SPTFR-ZEBOL	EED, IPL, BZA, GBN, TFD, PXR, BLH
	ZEBOL-SKTR	PXR, BLH, BZA, GBN, TFD, TUS, SSO, CIE, SVC, TCS
Q5	SKTR-EL PASO	EWM, CUS, SVC, TCS, SSO, CIE, ELP, DMN, CME
	HAROB-HISKU	OLM, ONP, CVO, EUG, HQM, UBG, BTG, LTJ, DSD, HUH
	HISKU-HARPR	ONP, CVO, EUG, LTJ, DSD, UBG, BTG, RBL, OED, LMT, FJS, LKV
	HARPR-HOMEG	CVO, EUG, OED, RBL, LMT, ENI, FJS, LKV
	HOMEG-HUPTU	SAC, PYE, LIN, OAK, ECA, LMT, RBL, ENI, OED, FJS
Q7	HUPTU-STIKM	OAK, ECA, PYE, LIN, SAC, ENI, RBL
	JINMO-JOGEN	CVO, HQM, LTJ, UBG, BTG, ONP, IMB, EUG, OLM, DSD, YKM, PDT, SEA
	JOGEN-JUNEJ	LTJ, IMB, UBG, EUG, CVO, RBL, LMT, FMG, DSD, LKV, OED, BTG
	JUNEJ-JAGWA	RBL, LMT, FMG, LIN, SAC, ECA, ENI, MOD, SWR, OAK, LKV, CZQ, AVE, SNS
	JAGWA-AVENAL	OAK, MOD, ECA, EHF, PRB, AVE, SNS, CZQ
Q9	SUMMA-SMIGE	OLM, UBG, SEA, YKM, BTG, QNP, IMB, HQM, PDT, EUG, LTJ, CVO, DSD, OED, EPH, MWH
	SMIGE-SUNBE	IMB, UBG, EUG, IMB, RBL, LMT, FMG, SAC, OED, CVO, LKV, DSD, BTG
	SUNBE-REBRG	RBL, LMT, FMG, SAC, ECA, MVA, CZQ, OAK, EHF, PMD, LKV, LIN, MOD, AVE, OED, SWR
	REBRG-DERBB	CZQ, PMD, EHF, LAX, RZS, AVE, MOD, ECA
	PAAGE-PAWLI	EPH, UBG, CVO, EUG, HQM, YKM, OLM, PDT, BTG, ONP, IMB, LTJ, DSD, LKV, OED, SEA
Q11	PAWLI-PITVE	EUG, FMG, SAC, IMB, LKV, OED, DSD, RBL, LMT, CVO, REO
	PITVE-PUSHH	FMG, SAC, LIN, SWR, MOD, OAL, RBL, LKV, LMT, MVA, CZQ
	PUSHH-LOS ANGELES	SAC, ECA, FMG, LIN, OAL, MOD, EHF, LAX, PMD, PDZ, HEC, OCN, CZQ, AVE, RZS
	All segments	None; GNSS required
	All segments	None; GNSS required
Q13	PLESS-NASHVILLE	ENL, GQO, PXV, BNA, IJU, FAM, BWG, CSX
Q15	CORONA-HONDS	CNX, ABQ, ACH, ONM, TXO, LVS, TCC, CME
Q19	HONDS-UNNOS	CNX, INK, CME, TXO, TCC
Q20	UNNOS-FUSCO	FST, ACH, INK, CME, SJT, TXO, TCC
	FUSCO-JUNCTION	ABI, CWK, CSI, INK, LZZ, JCT, SJT, STV, FST
Q21	JONEZ-RAZORBACK	BYP, EOS, TUL, TXK, ADM, RZC, OKM
Q22	GUSTI-OYSTY	AEX, DAS, MCB, LLA, BTR, LCH, HRV, LFT, LEV
	OYSTY-ACMES	RQR, GCV, MCB, BTR, PCU, GPT, HRV, LEV, SJI
	ACMES-CATLN	SJI, MGM, MCB, BFM, GPT, GCV, HRV, CEW, MVC, PCU, MEI

Route	Segment	DME
Q23	FORT SMITH–RAZORBACK	OKM, RZC, EOS, TUL
Q24	LAKE CHARLES–BATON ROUGE	AEX, DAS, LCH, MCB, LFT, BTR
	BATON ROUGE–IRUBE	AEX, LEV, MCB, LCH, RQR, HRV, BTR, GCV, MCB, PCU, SJI, LBY
	IRUBE–PAYTN	GCV, MCB, JYU, PCU, MEI, HRV, CEW, SJI
Q25	MEEOW–WALNUT RIDGE	ELD, MEM, LIT, FAM, RZC
	WALNUT RIDGE–WLSUN	MEM, STL, BWG, PXV, ENL, FAM, ARG, BNA, CSX, TTH
	WLSUN–POCKET CITY	BWG, PXV, ENL, BNA, TTH
Q26	WALNUT RIDGE–DEVAC	LIT, JKS, GQO, MEM, BNA, FAM, ARG, DYR, VUZ, RMG
Q27	FORT SMITH–ZALDA	OKM, SGF, RZC, EOS, TUL
Q28	GRAZN–PYRMD	EIC, LIT, ELD, OKM, TXK
	PYRMD–HAKAT	ARG, LIT, FAM, ELD, SGF, RZC, MEM, TXK
	HAKAT–ESTEE	ARG, LIT, FAM, SGF, MEM
	ESTEE–POCKET CITY	ARG, CSX, FAM, PXV, ENL, MEM, STL, BWG, TTH, BNA
Q29	HARES–MEMPHIS	MEM, ARG, LIT, JAN, ELD, SQS
	MEMPHIS–SIDAE	MEM, PXV, BNA, BWG, ARG, ENL
	SIDAE–POCKET CITY	PXV, TTH, BWG, ENL
Q30	SIDON–VULCAN	GLH, MEM, VUZ, JAN, JYU, MEI, MGM, SQS, RMG
Q31	DHART–JODOX	SQS, LIT, TXK
	JODOX–MARVELL	SQS, LIT, ELD, MEM, ARG
	MARVELL–TIIDE	ARG, BWG, PXV, FAM, LIT, MEM, ENL, TTH
	TIIDE–POCKET CITY	BWG, PXV, ENL, TTH
Q32	EL DORADO–GAGLE	AEX, JAN, MEM, SQS, SWB, ELD, LIT, TXK
	GAGLE–CRAMM	JAN, SQS, MEM, ARG, VUZ, BNA, LIT
	CRAMM–NASHVILLE	BWG, MEM, VUZ, BNA, GQO
	NASHVILLE–SWAPP	BWG, IIU, PXV, VXV, BNA, GQO
Q33	DHART–LITTLE ROCK	AEX, ELD, LIT, TXK, SWB, ARG, MEM, SQS
	LITTLE ROCK–PROWL	ELD, SGF, FAM, LIT, ARG, MEM, RZC, CSX, STL
Q34	TEXARKANA–MATIE	LIT, SWB, TXK, BYP, EIC, ELD, SQS
	MATIE–MEMPHIS	LIT, ARG, MEM, ELD, SQS
	MEMPHIS–SWAPP	BWG, ARG, MEM, MKL, SQS, PXV, BNA, GQO, IIU, VXV
Q35	KIMBERLY–NEERO	LTJ, PDT, DSD, IMB, LKV, BOI, REO, BAM, SDO
	NEERO–WINEN	BQU, SDO, BAM, REO, BVL, ILC, DTA, ELY, CDC, MLF, BCE
	WINEN–CORKR	CDC, BCE, BLD, ILC, MLF, TBC, PGS, INW, DRK
	CORKR–DRAKE	TBC, BCE, BLD, DRK, PGS, FLG, GCN, INW, TFD
Q36	RAZORBACK–TWITS	RZC, MEM, SGF, BUM, TUL, EOS, FAM, ARG, LIT
	TWITS–DEPEC	MEM, GQO, BNA, BWG, FAM, ARG, PXV, IIU
	DEPEC–NASHVILLE	GQO, BWG, BNA, PXV, IIU
	NASHVILLE–SWAPP	VXV, BWG, BNA, GQO, PXV, IIU
Q38	ROKIT–INCIN	DAS, LCH, SWB, IAH, LFK, HUB, AEX
	INCIN–LAREY	JAN, MCB, SWB, AEX
	LAREY–BESOM	JAN, JYU, MEI, SQS, VUZ
Q40	ALEXANDRIA–DOOMS	AEX, SWB, LCH, JAN, HEZ, MCB
	DOOMS–WINAP	JAN, SQS, MEI, MCB
	WINAP–MISLE	MEI, VUZ, JYU
Q42	KIRKSVILLE–STRUK	CID, IOW, UIN, LMN, IRK, BDF, STL, DEC, ENL, CSX
	STRUK–DANVILLE	ENL, IOW, UIN, BDF, DEC, STL, CSX, SPI, TTH, BVT, JOT, VHP, OXI, ENL, OKK, OBK, GIJ, FWA, GSH, IRK
	DANVILLE–MUNCIE	GIJ, SPI, BDF, OBK, OKK, VHP, BVT, DEC, GSH, FWA, JOT, TTH, OXI, ROD, FLM
	MUNCIE–HIDON	FLM, VHP, GSH, TTH, GIJ, OKK, FWA, ROD, OXI, CRL, GSH, APE, DJB, DXO, HNN, AIR, HVQ, CXR, EWC
	HIDON–BUBAA	AIR, APE, HNN, CXR, HVQ, EWC, DJB
	BUBAA–PSYKO	AIR, APE, DJB, CXR, HNN, EWC, SLT, CSN, JHW, ETG, PSB
	PSYKO–BRNAN	PSB, JHW, EWC, AIR, ETG, CSN, EMI, SLT
	BRNAN–MAALS	EMI, SLT, CSN, EWC, PSB, ETG, SAX, RBV, HNK, HUO, SIE
	MAALS–SUZIE	ETG, EMI, CSN, HUO, SIE, JFK, PSB, SLT, HNK
	SUZIE–EAST TEXAS	JFK, EMI, PSB, SLT, HNK, SIE, RBV, SAX, HUO, CYN
	EAST TEXAS–ELIOT	HUO, RBV, EMI, CYN, SAX, JFK, PSB, HNK
Q104	DEFUN–HEVVN	PIE, PZD, CRG, SZW, TAY, JYU, CEW, MGM, OTK, CRG
	HEVVN–PLYER	PIE, ORL, OMN, SRQ, TAY, LAL, CRG, SZW, PZD
	PLYER–SWABE	PIE, ORL, OMN, SRQ, TAY
	SWABE–ST PETERSBURG	LAL, ORL, OMN, SRQ, PHK, PIE
	ST PETERSBURG–CYPRESS	PHK, PBI, SRQ, PIE, VRB, ORL, FLL, LAL, OMN

Route	Segment	DME
Q106	SMELZ-BULZI	LAL, ORL, OMN, PHK, PIE, CRG, VRB, TAY, OTK, PZD, AMG, SZW
	BULZI-DRABK	AMG, PZD, TAY, CRG, SZW, MGM, OTK, JYU, CEW, SJI
	DRABK-GADAY	MGM, PZD, OTK, JYU, SZW, CEW, SJI
Q108	GADAY-HKUNA	CEW, JYU, MGM, SZW, RRS, PZD, MAI, OTK, GEF, MGR, TAY, AMG, CRG
Q110	THNDR-JAYMC	SRQ, VRB, PHK, PIE, LAL, VKZ, ORL, PBI
	JAYMC-RVERO	VKZ, VRB, PHK, PIE, LAL, SRQ, ORL, OMN, PBI, DHP
	RVERO-KPASA	OMN, PIE, PBI, SRQ, ORL, LAL
	KPASA-BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
	BRUTS-GULFR	OMN, AMG, CRG, SZW, PIE, TAY, PZD, OTK
Q112	GULFR-FEONA	TAY, MCN, PZD, CRG, OTK, SZW, AMG, MCN, ATL, MGM
	DEFUN-HEVVN	PIE, OTK, CRG, OMN, LAL, SZW, SRQ, ORL, VRB
	HEVVN-INPIN	JYU, PZD, CEW, SZW, MGM, OTK, TAY, AMG, PIE, CRG
Q116	KPASA-BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
	BRUTS-GULFR	OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK
Q118	GULFR-CEEYA	MCN, AMG, PZD, OTK, SZW, TAY
	KPASA-BRUTS	SRQ, VRB, ORL, PHK, TAY, PIE, OMN, OTK, LAL, CRG, SZW, AMG
	BRUTS-LENIE	OMN, AMG, CRG, TAY, LAL, PZD, SZW, OTK, MCN
Q501	VIXIS-GOPHER	ECK, FNT, APN, SSM, GRR, MBL, SAW, BAE, MNM, DLL, AUW, ODI, STE, FGT, EAU,
		DLH, GEP, BRD, MCW, MSP, ASP, TVC, GRB, RWF
Q502	GOPHER-SOBME	FGT, BRD, MCW, GEP, ABR, FAR, DLH, ODI, RWF, FSD
	KENPA-GOPHER	SSM, FNT, ECK, APN, SAW, GRB, BAE, DLL, AUW, ODI, FGT, DLH, EAU, MCW,
Q504		MSP, MNM, ASP, TVC, GEP, RWF, BRD
	GOPHER-SOBME	FGT, DLH, ODI, MCW, ABR, FAR, MSP, GEP, RWF, FSD, BRD
	NOTAP-CESNA	SSM, ECK, APN, GLR, PLN, ISQ, MNM, DLL, RHI, DLH, GEP, FGT, ODI, ASP, TVC,
		SAW, GRB, BRD
Q505	CESNA-HEMDI	ODI, GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, DLL, BRD
	OMAGA-RIMBE	SSM, TVC, ASP, SAW, GRB
	RIMBE-CESNA	SSM, RHI, DLL, DLH, GEP, FGT, TVC, SAW, GRB, BRD, ODI
	CESNA-HEMDI	GEP, DLH, FGT, RWF, FAR, AXN, FSD, ABR, BRD, ODI, GRB

RNAV Routing Pitch and Catch Points

The purpose of this section of the Special High Altitude Routes is to present user routing options for flight within the initial HAR Phase I expansion airspace. Users are able to fly user-preferred routes, referred to as non-restrictive routing (NRR), between specific fixes described by **pitch** (entry into) and **catch** (exit out of) fixes in the HAR airspace. Pitch points indicate an end of departure procedures, preferred IFR routings, or other established routing programs where a flight can begin a segment of NRR. The catch point indicates where a flight ends a segment of NRR and joins published arrival procedures, preferred IFR routing, or other established routing programs.

The HAR Phase I expansion airspace is defined as that airspace at and above FL 350 in fourteen of the western and southern Air Route Traffic Control Centers (ARTCCs). The airspace includes Minneapolis (ZMP), Chicago (ZAU), Kansas City (ZKC), Denver (ZDV), Salt Lake City (ZLC), Oakland (ZOA), Seattle Centers (ZSE), Los Angeles (ZLA), Albuquerque (ZAB), Fort Worth (ZFW), Memphis (ZME), and Houston (ZHU). Jacksonville (ZJX) and Miami (ZMA) are included for east-west routes only.

To develop a flight plan, select pitch and catch points based upon your desired route across the Phase I airspace. Filing requirements to pitch points, and from catch points, remain unchanged from current procedures. For the portion of the route between the pitch and catch points, non-restrictive routing is permitted.

Where pitch points for a specific airport are not identified, aircraft should file an appropriate departure procedure (DP), or any other user preferred routing prior to the NRR portion of their routing. Where catch points for a specific airport are not identified aircraft should file, after the NRR portion of their routing, an appropriate arrival procedure or other user preferred routing to their destination.

Additionally, information concerning the location and schedule of Special Use Airspace (SUA) and Air Traffic Control Assigned Airspace (ATCAA) can be found on the Web Site: <http://sua.faa.gov/sua/Welcome.do>. ATCAA refers to airspace in the high altitude structure supporting military and other special operations. Users are encouraged to file around these areas when they are scheduled to be active, thereby avoiding unplanned reroutes around them.

In conjunction with the HAR program RNAV routes have been established to provide for a systematic flow of air traffic in specific portions of the enroute flight environment. The designator for these RNAV routes begin with the letter Q, for example, Q-501. Where those routes aid in the efficient orderly management of air traffic they will be published as preferred IFR routes.

HAR Special High Altitude Pitch (entry) Points for Nonrestrictive Routing for Airports Located Outside HAR Phase I Expansion Airspace

Westbound traffic originating outside of HAR airspace entering ZMP, ZAU, ZKC and ZME can begin non-restrictive routing over any of the following pitch points (listed from north to south):

DLH, CESNA, GEP, BAE, MKG, GRR, PMM, GSH, CADIZ, FWA, VHP, FLM, IIU, PXV, SGF, RZC, BNA, SALMS, VUZ, BOYDD, MIE.

Traffic originating outside of HAR airspace may also begin Nonrestrictive Routing upon crossing the pitch line depicted on the associated graphic.

HAR Special High Altitude Pitch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

This section lists pitch points for airports within the HAR Phase I expansion airspace.

Albuquerque	ABQ, GUP, HANOS or ZUN
Austin	ABI, FUZ, JCT, MQP, NAVYS, SJT or TNV
Boca Raton, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Burbank includes Santa Monica and Van Nuys	GMN, MARKS or DAG LAS or HEC EED or PMD BLH
Chicago Terminal Area	IOW, PLL275065, MZV or BAE
Dallas/Fort Worth Terminal Area	ABI, LBB, GTH, CDS, MRMAC, IRW, TUL, MLC, TXK ELD, SWB or Aircraft destined the Chicago terminal area Except MDW EAKER MIDEE BDF BRADFORD-STAR Or MLC J105 SGF BDF BRADFORD-STAR
Denver Terminal Area	PUB, DVC, DBL, RLG, EKR, LAR, MBW, CYS, BFF, HANKI, NATTI, ASHBY, BELKE, CABET, WEEDS, OR BINKE
Fort Lauderdale (or) Fort Lauderdale Executive	THNDR KPASA Q118 LENIE or THNDR KPASA Q116 CEEYA or THNDR KPASA Q110 FEONA or THNDR SMELZ Q106 GADAY or THNDR SMELZ Q106 BULZI
Houston Bush	LIT, ELD, MLC, JCT or Aircraft destined Atlanta Terminal Area LCH Q24 PAYTN HONIE-RNAV STAR or Aircraft joining J37 to the northeast, GUSTI SID GUSTI Q22 CATLN or Aircraft joining J42 to the northeast, EL DORADO SID ELD Q32 J42

Houston Hobby	LIT, ELD, MLC, JCT, or Aircraft joining J42 to the northeast, EL DORADO SID ELD Q32 J42
Jacksonville, FL	TAY
Kansas City Terminal Area	TIFTO, CATTS or KENTN
Los Angeles, includes Ontario	GMN, RZS or DAG LAS or TRM EED or TRM PKE
Las Vegas	DOBNE, MOSBI, NICLE, TRALR or ZELOT
Long Beach includes Orange County	GMN SNS, EHF, LANDO or TRM PKE or TRM EED
Memphis	BNA, HAAWK, SALMS or SQS
Miami Terminal Area	WINCO KPASA Q118 LENIE or WINCO KPASA Q116 CEEYA or WINCO KPASA Q110 FEONA or WINCO SMELZ Q106 GADAY or WINCO SMELZ Q106 BULZI
Milwaukee	GREAS
Minneapolis Terminal Area*	ONL, ABR, FAR, OBH, OVR, FOD
New Orleans Terminal Area	AEX, MEI, SQS, KAPLN
Orlando Terminal Area	WEBBS BRUTS Q118 LENIE or WEBBS GULFR Q116 CEEYA or WEBBS BULZI Q106 GADAY or WEBBS FEONA or WEBBS BULZI
Palm Beach, FL	TBIRD KPASA Q118 LENIE or TBIRD KPASA Q116 CEEYA or TBIRD KPASA Q110 FEONA or TBIRD SMELZ Q106 BULZI or TBIRD SMELZ Q106 GADAY
Palm Springs	TRM JOTNU BLD or TRM EED or TRM PKE
Phoenix	CHILY, CIE, CULTS, RSK, DOVEE, GCN, MESSI, SJN, DRYHT or MOHAK
Portland, OR	PDT, TIMEE

Salt Lake City	HVE, DTA, MLF, BCE, OAL, MTU, BVL, OCS, TWF, DBS, BPI or TCH J56 CHE or TCH J173 EKR
Saint Louis	VIH, MAP, MYERZ, MCM or HLV MCI
San Antonio Terminal Area	FUZ, SJT, MQP, ABI or Aircraft North of LFK, LFK or Aircraft South of HUB, ELA or Aircraft South of LFK and North of HUB LCH
San Diego	TRM EED or TRM PKE or TRM JOTNU BLD
San Francisco Bay Area Oakland San Jose	GALLI, INSLO, HAROL JSICA GALLI, INSLO, HAROL JSICA GALLI or INSLO
Seattle	BLUIT
Southwest Florida Airports (RSW/FMY)	JOCKS KPASA Q118 LENIE or JOCKS KPASA Q116 CEEYA or JOCKS KPASA Q110 FEONA or JOCKS SMELZ Q106 GADAY or JOCKS SMELZ Q106 BULZI
Tampa Terminal Area	FEONA, BULZI or BRUTS Q118 LENIE or GULFR Q116 CEEYA or BULZI Q106 GADAY

*MSP area departures with destinations east of 93 degrees west longitude via preferred IFR routing.

Catch Points for Airports Located Outside HAR Phase I Expansion Airspace

This section lists exit points for aircraft destined to specific destinations which are outside the HAR Phase I airspace.

Atlanta Terminal Area	Aircraft through ZME airspace from ZKC airspace east of FAM, Pless Q19 BNA or Aircraft through ZME airspace from ZKC airspace west of FAM, ARG Q26 DEVAC or MEM or Aircraft through ZME airspace from ZID airspace west of a line from VHP to BWG, BNA or Aircraft through ZME airspace from ZID airspace east of a line from VHP to BWG, BWG or Aircraft through ZME airspace from ZFW airspace, MEM or MEI HONIE (RNAV)–STAR or PATYN HONIE (RNAV)–STAR
-----------------------	---

Baltimore–Washington*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA or VUZ
Boston*	GEP, CRL, ECK, IIU, BNA or VUZ
Buffalo*	GEP, CRL
Hartford Bradley*	GEP, CRL
Canton–Akron*	GIJ, VHP, GEP
Charlotte	BNA, VUZ
Cincinnati Terminal Area	BNA, PXV or Aircraft north of SLC, JOT or Aircraft over or south of SLC, ENL or SLC or SFO departures, ENL, JOT
Cleveland Terminal Area*	OBK
Detroit Terminal Area	BAE MKG POLAR–STAR or VHP FWA MIZAR–STAR
Detroit Young	VHP FWA or LAN SPRTN–STAR
Indianapolis Terminal Area	BIB, SPI, JOT
Louisville	ENL, MEM
Newark*	GEP, VHP, FLM, IIU, BNA, VUZ or IOW GIJ J554 CRL J584 SLT FQM
New York Kennedy*	GEP, VHP, FLM, IIU, BNA, VUZ or DBQ J94 PMM J70 LVZ LENDY–STAR
New York LaGuardia*	GIJ, GEP, VHP, BAE, FLM, IIU, BNA, VUZ
Philadelphia Terminal Area*	GIJ, GEP, VHP, BAE, WHETT, BNA, VUZ
Pittsburgh Terminal Area*	VHP, GIJ, BAE, GEP
Pontiac	LFD, LAN, VHP, FWA, GEP
Providence	JHW, HEMDI, CESNA, GEP, GRB, TVC, ASP, VHP, IIU, BNA, VUZ
Raleigh–Durham	FLM, IIU, BNA, VUZ
Toronto Terminal Area	ECK, SVM, SSM, GEP
Teterboro*	GEP, VHP, CRL, BNA, VUZ
Washington Dulles/National*	GIJ, GEP, FLM, IIU, BAE, VHP, WHETT, BNA, VUZ
White Plains*	GEP, VHP, CRL, FLM, IIU, BNA, VUZ
Willow Run*	LAN, LFD, VHP, FWA, GEP

*Eastbound aircraft over flying ZMP center airspace entering Toronto center airspace, file direct SSM or via J63, J522, Q505, Q504, Q502, Q501

or

Entering ZAU or ZOB airspace from north of DPR J16 MCW, GEP

or

Entering ZAU or ZOB airspace from or south of DPR J16 MCW, CRL.

Catch Points for Airports Located Within (below) HAR Phase I Expansion Airspace

This section lists exit points for aircraft destined to airports which are below HAR Phase I airspace.

Albuquerque Terminal Area	CURLY CURLY-STAR or ESPAN FRIHO-STAR or LAVAN LAVAN-STAR or FTI FRIHO-STAR or MIERA MIERA-STAR
Austin Terminal Area	Aircraft west of a north-south line at LFK, BLEWE or Aircraft east of a north-south line at LFK, IDU or LLO
Boca Raton, FL	CEW DEFUN Q112 INPIN SHDAY (RNAV)-STAR Aircraft through ZHU remain south of ZME and ZTL airspace or DEFUN Q112 INPIN SHDAY (RNAV)-STAR Aircraft through ZHU remain south of ZME and ZTL airspace or SZW INPIN SHDAY (RNAV)-STAR
Chicago Midway	CVA MOTIF-STAR or PIA MOTIF-STAR or DBQ CVA MOTIF-STAR or LMN MOTIF-STAR
Chicago O'Hare Terminal Area	GEP DLL MSN JVL JANESVILLE-STAR or TVC PULLMAN-STAR or FOD DBQ JVL JANESVILLE-STAR or MCW JANESVILLE-STAR or GCK IRK BRADFORD-STAR
Dallas/Fort Worth Terminal Area	IRW, LOSZY, FSM, LIT, SQS, MLU, AEX, JUMBO, TQA, TURKI, HEATR Aircraft through ZME airspace from north and west of PXV, RZC, Q23 FSM or Aircraft through ZME airspace from east of PXV, PXV Q25 MEEOW or Aircraft through ZME airspace from J6 down to, but not including J52, LIT, SQS or Aircraft through ZME airspace from J52 and south of J52, SQS

Denver Terminal Area	OATHE DANDD-STAR
	or
	HGO QUAIL-STAR
	or
	LOPEC-STAR
	or
	ALS LARKS-STAR
	or
	HBU POWDR-STAR
	or
	EKR TOMSN-STAR
	or
	CHE TOMSN-STAR
	or
	BFF LANDR-STAR
	or
	LBF SAYGE-STAR
	or
	HCT SAYGE-STAR
	or
	RSK LARKS-STAR
	or
	LAA QUAIL-STAR
	or
	GCK J154 RYLIE DANDD-STAR
	or
	OCS J154 ALPOE RAMMS-STAR
	or
	YANKI J114 SNY LANDR-STAR
	or
	Aircraft filed BIL or east, MBW RAMMS-STAR
Ft Lauderdale or Ft Lauderdale Executive	CEW DEFUN Q104 PIE SWAGS (RNAV)-STAR
	Aircraft through ZHU airspace remain south ZME and ZTL airspace
	or
Houston Bush	SZW HEVVN Q104 PIE SWAGS (RNAV)-STAR
	CRP, CVE, LLO, LUKIY, SAT
	or
	Aircraft south and east of LLA, JEPEG
	or
	MISLE Q40 AEX
	or
	Aircraft north and east of SJI, SJI
	or
	Aircraft east of PXV, PXV Q31 DHART SWB
	or
Houston Hobby	Aircraft north and west of PXV, PROWL Q33 DHART SWB
	CRP, ELLVR, SAT, SWB
	or
	Aircraft south and east of GIRLY, KCEEE
	or
	Aircraft north and east of SJI, SJI
	or
	BESOM Q38 ROKIT ROKIT-STAR
	or
	Aircraft east of PXV, PXV Q29 HARES SWB
	or
Jacksonville	Aircraft north and west of PXV, PROWL Q33 DHART SWB
	GADAY ZOOSS TAY
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
	ZOOSS TAY

John Wayne–Orange County	HEC, PGS, BLD or Aircraft south of TBC from ZAB airspace, HIPPI
Kansas City Terminal Area	LMN BRAYMER–STAR or PWE ROBINSON–STAR or EMP JHAWK–STAR
Las Vegas	DILCO, LIDAT, IGM or Aircraft over PGA or north of PGA KSINO or Aircraft south of PGA PGS LYNBY
Los Angeles Terminal Area	Aircraft North of TBC, HEC, PGS or Aircraft South of TBC from ZAB airspace, HIPPI, MESSI
Miami Terminal Area	CEW DEFUN Q104 CYY DEEDS (RNAV)–STAR Aircraft through ZHU airspace remain south ZME and ZTL airspace or SZW HEVVN Q104 CYY DEEDS (RNAV)–STAR
Minneapolis Terminal Area	Aircraft from north, west, south, FAR GOPHER–STAR or RWF SKETR–STAR or ALO KASPR–STAR or BRD GOPHER–STAR or BAE EAU CLAIRE–STAR or FOD TWOLF–STAR
Memphis Terminal Area	ARG, BWG, FSM, PXV, LIT, RZC, SQS, VUZ, BNA, GQO, ELD
Naples, FL	CEW DEFUN Q104 PLYER PIKKR (RNAV)–STAR Aircraft through ZHU AIRSPACE remain south of ZME and ZTL airspace or SZW HEVVN Q104 PLYER PIKKR (RNAV)–STAR
Nashville	CCT, GHM, GUITR, TINGS, VOLLs
New Orleans Terminal Area	BLUEZ, GPT, LCH, MCB, TBD, FATSO
Oakland	ILA or KATTS PAMMY or Aircraft over or south of a line ILC J16 DVC REANA KATTS PAMMY or Aircraft from north of ILC, JOPER PAMMY or KATTS PAMMY or Aircraft over or south of ILC, REANA KATTS PAMMY
Orlando Terminal Area	GADAY Q108 CLAWZ LEESE–STAR Aircraft through ZHU airspace remain south of ZME/ZTL airspace or OTK LEESE–STAR

Palm Beach, FL	CEW DEFUN Q112 INPIN GULLO (RNAV)–STAR Aircraft through ZHU airspace remain south of ZME and ZTL airspace or SZW INPIN GULLO (RNAV)–STAR
Phoenix	CORKR DRK or Aircraft from ZDV airspace, GUP or Aircraft from ZAB airspace, ZUN, MOHAK, SSO or VYLLA TUS
Phoenix Satellites	FLG, SSO, MOHAK or VYLLA, TUS
Portland, OR Terminal Area	ARNIT BONVL–STAR or LARNO BONVL–STAR or MOXEE MOXEE–STAR
St. Louis Terminal Area	SGF TRAKE–STAR or BUM TRAKE–STAR or ANX TRAKE–STAR or LMN IRK RIVRS–STAR or RBS VANDALIA–STAR
Salt Lake City Terminal Area	JNC J12 HELPR SPANE–STAR or EKR MTU SPANE–STAR or BCE DTA–TCH or MLF DTA–TCH or BVL BONNEVILLE–STAR or BYI BEARR–STAR or PIH BEARR–STAR or DBS BRIGHAM CITY–STAR or JAC BRIGHAM CITY–STAR or BPI BRIGHAM CITY–STAR or OCS BRIGHAM CITY–STAR
San Diego Terminal Area	EED, LAX, GBN
Santa Ana	HEC, PGS, BLD, HIPPI
San Antonio Terminal Area	IDU, CSI, JCT, LLO, CRP, LRD or West of a north–south line at LFK, BLEWE or East of a north–south line at LFK, IDU

San Francisco	FMG GOLDEN GATE--STAR
	or
	MVA MODESTO--STAR
	or
	ENI GOLDEN GATE--STAR
	or
San Jose	OAL MODESTO--STAR
	or
	South of a line ILC to DVC, REANA KATTS OAL MODESTO--STAR
	FMG HYP EL NIDO--STAR
	or
	OAL HYP EL NIDO--STAR
Seattle Terminal Area	or
	ENI GOLDEN GATE--STAR
	or
	South of a line ILC to DVC, REANA KATTS KICHI CANDA EL NIDO--STAR
	Aircraft From northeast, southeast, south, TEMPL GLASR--STAR
	or
Southwest Florida Airports RSW and FMY	SUNED CHINS--STAR
	or
	BTG OLMYPIA--STAR
	CEW DEFUN Q104 SWABE JOSFF--STAR
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
Tampa Terminal Area	SZW HEVVN Q104 SWABE JOSFF--STAR
	CEW DEFUN Q104 HEVVN DARBS--STAR
	Aircraft through ZHU airspace remain south of ZME and ZTL airspace
	or
	SZW DARBS--STAR
	DRK PXR
Tucson	or
	MOHAK GBN

VISUAL FLIGHT RULES (VFR) WAYPOINTS

VFR Waypoint names consist of five letters beginning with "VP". Stand-alone VFR Waypoints are portrayed on VFR Charts using the same four-point star symbol currently used for Instrument Flight Rules (IFR) Waypoints.

VFR Waypoints collocated with Visual Checkpoints (Visual Reporting Points) are portrayed with a Visual Check Point flag. The VFR Waypoint name is shown in parentheses adjacent to the Visual Check Point name.

VFR Waypoint names are not intended to be pronounceable and shall not be used in ATC communications.

CAUTION: GPS accuracy necessitates extra vigilance for other aircraft when navigating near any fix retrieved from a GPS database.

BALTIMORE–WASHINGTON TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPAXI	_____	N38°34.57' /W076°20.38'
VPONX	_____	N39°06.65' /W076°55.92'
VPOOP	_____	N38°56.32' /W076°36.90'

BOSTON HELICOPTER CHART

VPBAY	_____	N42°16.17' /W070°49.48'
VPBLT	_____	N42°19.67' /W070°53.40'
VPCGS	_____	N42°22.08' /W071°03.13'
VPEVS	_____	N42°23.52' /W071°04.10'
VPFEN	_____	N42°12.58' /W071°08.88'
VPFRE	_____	N42°25.03' /W071°12.32'
VPGLV	_____	N42°21.88' /W070°52.18'
VPHAM	_____	N42°30.13' /W071°07.15'
VPPIK	_____	N42°20.37' /W071°15.93'
VPQUA	_____	N42°12.10' /W071°04.78'
VPQUB	_____	N42°12.60' /W070°59.83'
VPSPF	_____	N42°24.20' /W071°09.47'
VPTOB	_____	N42°31.42' /W070°59.82'
VPWAN	_____	N42°36.88' /W071°19.45'

BOSTON TERMINAL AREA CHART

VPCOH	Cohasset	N42°13.58' /W070°48.94'
VPCUT	Cuttyhunk Harbor	N41°25.50' /W070°55.03'
VPFRA	Framingham Shopping Center	N42°18.16' /W071°23.65'
VPHOL	Woods Hole	N41°31.06' /W070°40.60'
VPHUL	Hull	N42°18.20' /W070°55.30'
VPLPT	Nantucket Great Point	N41°23.41' /W070°02.78'
VPNED	Needham Towers	N42°18.51' /W071°14.64'
VPPEA	Peabody Shopping Center	N42°32.52' /W070°56.69'
VPROC	Rockingham Race Track	N42°46.29' /W071°13.57'
VPSCI	Scituate	N42°11.89' /W070°43.69'
VPTPT	Nantucket Third Point	N41°18.51' /W070°03.37'
VPTUC	Tuckernuck	N41°18.31' /W070°15.43'
VPWAK	Wakefield	N42°30.72' /W071°05.24'
VPWAN	Wang Towers	N42°36.88' /W071°19.45'

CHARLOTTE SECTIONAL CHART

VPATO	_____	N34°37.37' /W076°31.47'
VPAVA	_____	N34°57.00' /W077°16.50'
VPBFE	_____	N32°16.38' /W080°47.50'
VPBRA	_____	N36°13.75' /W076°08.08'
VPGCE	_____	N36°03.90' /W076°36.42'
VPGHI	_____	N35°15.30' /W075°31.25'
VPGIO	_____	N35°32.50' /W076°37.33'
VPKJU	_____	N35°26.58' /W076°10.22'
VPLMN	_____	N34°55.43' /W077°46.42'
VPMAB	_____	N34°42.20' /W077°03.50'
VPNPO	ISLE OF PALMS	N32°47.78' /W079°46.45'
VPOKY	_____	N35°06.53' /W075°59.17'
VPREP	_____	N32°33.98' /W080°21.82'
VPRRS	_____	N33°25.45' /W079°07.60'
VPUMO	_____	N35°35.63' /W075°28.08'
VPWZO	_____	N36°00.87' /W075°40.07'
VPZIE	_____	N32°01.62' /W080°53.42'

CHICAGO SECTIONAL CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPCOH	_____	N31°49.35'/W081°51.07'

DENVER TERMINAL AREA CHART/FLYWAY CHART

VPBEN	_____	N39°44.28'/W104°26.00'
VPFTG	_____	N39°44.35'/W104°32.75'
VPNIC	NORTH INTERCHANGE	N39°58.90'/W104°59.27'

HOUSTON TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPBWY	_____	N29°46.25'/W095°09.24'
VPDTN	_____	N29°46.59'/W095°22.01'
VPGLA	_____	N30°08.32'/W095°06.62'
VPGLB	_____	N30°07.80'/W094°55.70'
VPKTY	_____	N29°47.05'/W095°44.92'
VPPLN	_____	N30°08.80'/W095°50.42'
VPRSN	_____	N29°30.00'/W095°41.00'
VPSND	_____	N29°23.13'/W095°28.86'
VPSNT	_____	N29°49.29'/W094°53.94'
VPTNE	_____	N29°47.48'/W095°03.34'
VPTNW	_____	N29°47.06'/W095°33.81'
VPTRK	_____	N29°24.06'/W095°10.44'

JACKSONVILLE SECTIONAL CHART

VPAFI	_____	N31°49.35'/W081°51.07'
VPAFY	_____	N30°07.00'/W081°21.33'
VPBEC	_____	N29°46.25'/W081°15.10'
VPCJA	_____	N29°30.00'/W081°06.00'
VPCKY	_____	N28°46.50'/W082°34.00'
VPCNY	_____	N28°30.00'/W080°45.00'
VPDAD	DADE CITY	N28°22.57'/W082°11.25'
VPDAR	_____	N31°22.38'/W081°24.13'
VPDFI	_____	N29°00.17'/W081°20.85'
VPDUT	_____	N27°37.70'/W082°09.10'
VPEAR	CLEARWATER BEACH	N27°58.67'/W082°49.83'
VPEGV	_____	N29°39.97'/W081°24.87'
VPFFU	_____	N28°57.08'/W081°00.33'
VPGPE	ST PETE BEACH	N27°43.50'/W082°44.67'
VPHAA	_____	N30°04.02'/W083°40.02'
VPHUC	_____	N28°19.87'/W082°43.77'
VPIWA	MIDWAY	N31°48.33'/W081°25.85'
VPJMY	_____	N29°26.92'/W081°18.27'
VPKER	LAKE PARKER	N28°04.00'/W081°56.00'
VPLEV	_____	N28°48.00'/W080°52.00'
VPLJA	_____	N29°00.00'/W080°51.00'
VPMAI	_____	N30°50.02'/W084°56.63'
VPTLH	_____	N30°32.70'/W083°52.22'
VPXZY	_____	N29°35.00'/W083°10.00'
VPYIW	_____	N30°42.28'/W081°27.25'
VPZIE	_____	N32°01.62'/W080°53.42'

KANSAS CITY SECTIONAL CHART

VPAGO	_____	N37°50.33'/W090°29.03'
VPBEK	_____	N37°15.07'/W092°30.67'
VPDEN	_____	N37°46.75'/W092°19.20'
VPENE	_____	N37°44.75'/W091°55.78'
VPES	_____	N36°59.48'/W091°00.88'
VPFME	_____	N37°41.00'/W092°38.33'
VPGXY	_____	N37°15.50'/W091°40.17'
VPMBE	_____	N37°11.08'/W090°27.92'
VPMKE	_____	N37°24.47'/W092°40.00'
VPROV	_____	N38°01.72'/W091°12.81'
VPUTT	_____	N37°52.05'/W092°01.20'

LOS ANGELES SECTIONAL CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPCNG	CONEJO GRADE US HWY 101	N34°12.54'/W118°59.61'
VPCSU	CSU CHANNEL ISLANDS	N34°09.76'/W119°02.53'
VPFPL	OXNARD FINANCIAL PLAZA	N34°13.71'/W119°10.39'
VPSTC	SATICOY BRIDGE	N34°16.62'/W119°08.34'

LOS ANGELES TERMINAL AREA CHART/FLYWAY CHART

VPCNG	CONEJO GRADE US HWY 101	N34°12.54'/W118°59.61'
VPCSU	CSU CHANNEL ISLANDS	N34°09.76'/W119°02.53'
VPGETY	GETTY CENTER	N34°04.84'/W118°28.66'
VPLBP	BANNING PASS	N33°56.05'/W116°59.63'
VPLCC	CHAFFEY COLLEGE	N34°08.87'/W117°34.33'
VPLCP	CAJON PASS	N34°18.07'/W117°27.68'
VPLDL	DISNEYLAND	N33°48.72'/W117°55.13'
VPLDP	DANA POINT	N33°27.62'/W117°42.87'
VPLDS	DODGER STADIUM	N34°04.42'/W118°14.42'
VPLFX	91/605 INTERCHANGE	N33°52.38'/W118°06.08'
VPLGP	GRIFFITH PARK OBSERVATORY	N34°07.10'/W118°18.02'
VPLHF	110/405 FWYS	N33°51.42'/W118°17.10'
VPLHP	HUNTINGTON PIER	N33°39.32'/W118°00.25'
VPLKH	KING HARBOR	N33°50.75'/W118°23.88'
VPLLC	L.A. COLISEUM	N34°00.83'/W118°17.27'
VPLLM	LAKE MATHEWS	N33°50.58'/W117°26.85'
VPLMM	MAGIC MOUNTAIN	N34°26.20'/W118°36.28'
VPLMS	MILE SQUARE PARK	N33°43.40'/W117°56.77'
VPLPD	PRADO DAM	N33°53.40'/W117°38.48'
VPLPP	PACIFIC PALISADES	N34°02.13'/W118°32.15'
VPLQM	QUEEN MARY	N33°45.17'/W118°11.37'
VPLRB	ROSE BOWL	N34°09.67'/W118°10.05'
VPLRT	SANTA ANITA RACE TRACK	N34°08.45'/W118°02.65'
VPLSA	SANTA ANA CANYON	N33°52.03'/W117°42.68'
VPLSB	SANTA FE FLOOD BASIN	N34°07.72'/W117°57.30'
VPLSC	STATE COLLEGE	N33°52.97'/W117°53.13'
VPLSF	SAN FERNANDO RESERVOIR	N34°17.87'/W118°29.00'
VPLSP	SIGNAL PEAK	N33°36.33'/W117°48.63'
VPLSR	HAWTHORNE & 405 FREEWAY	N33°53.07'/W118°21.13'
VPLSS	SANTA SUSANA PASS	N34°16.00'/W118°38.43'
VPLTW	TUJUNGA WASH & FOOTHILL	N34°16.40'/W118°20.30'
VPLVT	VINCENT THOMAS BRIDGE	N33°44.97'/W118°16.32'
VPLWT	WATER TANK	N34°10.82'/W118°46.27'
VPNEW	NEWHALL PASS	N34°20.18'/W118°30.72'
VPSTC	SATICOY BRIDGE	N34°16.62'/W119°08.34'

MIAMI SECTIONAL CHART

VPACH	HOLLYWOOD BEACH	N26°00.92'/W080°06.93'
VPBOV	_____	N27°57.00'/W080°46.75'
VPCLC	_____	N26°27.07'/W082°00.88'
VPCTE	_____	N26°09.28'/W081°20.70'
VPDAD	DADE CITY	N28°22.57'/W082°11.25'
VPDUT	_____	N27°37.70'/W082°09.10'
VPDZE	_____	N27°19.00'/W080°44.17'
VPEAR	CLEARWATER BEACH	N27°58.67'/W082°49.83'
VPEDY	ANDYTOWN TOLLGATE	N26°08.78'/W080°28.00'
VPFAH	_____	N26°25.40'/W081°29.67'
VPGPE	ST PETE BEACH	N27°43.50'/W082°44.67'
VPHRO	_____	N27°05.97'/W082°12.20'
VPHUC	_____	N28°19.87'/W082°43.77'
VPIBR	_____	N27°12.47'/W081°40.22'
VPKER	LAKE PARKER	N28°04.00'/W081°56.00'
VPKOE	_____	N24°40.08'/W081°20.55'
VPLYY	_____	N24°49.07'/W080°49.17'
VPMBO	GULFSTREAM PARK	N25°58.57'/W080°08.17'
VPOBA	PUMPING STATION	N26°28.30'/W080°26.75'
VP RBI	_____	N25°50.67'/W080°55.18'
VP RNL	RANGER STATION	N25°22.92'/W080°36.58'
VPWMO	_____	N27°03.00'/W080°35.00'

MIAMI TERMINAL AREA CHART/FLYWAY CHART

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPACH	HOLLYWOOD BEACH	N26°00.92' /W080°06.93'
VPEDY	ANDYTOWN TOLLGATE	N26°08.78' /W080°28.00'
VPMBO	GULFSTREAM PARK	N25°58.57' /W080°08.17'
VPOBA	PUMPING STATION	N26°28.30' /W080°26.75'
VPRBI		N25°50.67' /W080°55.18'
VPRNL	RANGER STATION	N25°22.92' /W080°36.58'

NEW ORLEANS SECTIONAL CHART

VPGPT		N30°25.95' /W089°05.62'
VPLIP	PHILLIPS INLET	N30°16.23' /W085°59.25'
VPMAI		N30°50.02' /W084°56.63'
VPMOB		N30°23.00' /W088°31.72'
VPRAM		N30°18.95' /W089°35.88'
VPRER		N30°13.87' /W085°20.67'
VPRIV		N30°54.85' /W087°57.82'
VPSAW		N30°49.65' /W089°07.42'
VPTHR		N30°19.93' /W087°08.50'

NEW YORK HELICOPTER CHART

VPJAY		N40°59.00' /W073°07.00'
VPLYD		N40°57.37' /W073°29.59'
VPROK		N40°52.70' /W073°44.24'

PHOENIX TERMINAL AREA CHART/FLYWAY CHART

VPALL	ALLENVILLE	N33°20.97' /W112°35.20'
VPAQU	AQUEDUCT PUMPING STATION	N33°40.05' /W112°41.38'
VPARM	ARROWHEAD MALL	N33°38.52' /W112°13.48'
VPAWG	AHWATUKEE GOLF COURSE	N33°19.98' /W111°59.08'
VPAZM	ARIZONA MILLS	N33°23.43' /W111°57.88'
VPBAR	BARTLETT DAM	N33°49.10' /W111°37.92'
VPCCC	COUNTRY CLUB & CANAL	N33°30.73' /W111°50.37'
VPCNL	CANAL	N33°33.23' /W111°46.89'
VPFRB	FIREBIRD LAKE	N33°16.35' /W111°58.10'
VPFTN	FOUNTAIN HILLS	N33°36.12' /W111°42.72'
VPGLX	GILA CROSSING	N33°16.55' /W112°10.08'
VPGPP	GLENDALE POWER PLANT	N33°33.27' /W112°13.00'
VPMAR	MARICOPA	N33°03.42' /W112°02.88'
VPMHS	MESQUITE HIGH SCHOOL	N33°20.53' /W111°49.58'
VPNRV	NEW RIVER	N33°55.08' /W112°08.45'
VPNTT	NORTH TEST TRACK	N33°03.50' /W111°55.83'
VPPIR	PIR	N33°22.52' /W112°18.90'
VPQTR	QUINTERO GOLF COURSE	N33°49.53' /W112°23.58'
VPVRV	RIO VERDE COMMUNITY	N33°44.37' /W111°39.62'
VPSMC	SOUTH MOUNTAIN COLLEGE	N33°23.02' /W112°02.12'
VPSQP	SQUAW PEAK	N33°32.83' /W112°01.27'
VPSSS	SUPERSTITION SPRINGS MALL	N33°23.50' /W111°41.37'
VPSTN	SANTAN MOUNTAINS	N33°09.23' /W111°40.92'
VPSTT	SOUTH TEST TRACK	N32°56.25' /W111°59.67'
VPZZZ		N33°20.18' /W111°26.53'

ST LOUIS TERMINAL AREA CHART/FLYWAY CHART

VPAGN	TV ANTENNA	N38°32.08' /W090°22.42'
VPBPE		N38°23.80' /W090°20.38'
VPCJY	HOLIDAY SHORES	N38°55.00' /W089°56.00'
VPCOJ	WINFIELD DAM	N39°00.28' /W090°41.23'
VPDFA	JEFFERSON BARRACKS BRIDGE	N38°29.18' /W090°16.47'
VPEAZ	BUSCH STADIUM	N38°37.43' /W090°11.55'
VPEDJ	WATER TANKS	N38°45.30' /W090°34.87'
VPEGR	GAS TANKS	N38°35.80' /W090°19.32'
VPEOX	ST PETERS	N38°47.17' /W090°39.25'

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPFAI	HOWELL ISLAND	N38°40.00'/W090°43.00'
VPFFY	_____	N38°55.37'/W090°17.30'
VPGPF	_____	N38°35.60'/W090°26.92'
VPGVI	_____	N38°32.30'/W090°27.80'
VPHRQ	CHAIN OF ROCKS BRIDGE	N38°45.88'/W090°10.42'
VPIBO	WATERLOO	N38°20.00'/W090°09.00'
VPJMU	HORSESHOE LAKE	N38°41.00'/W090°05.00'
VPKNY	PACIFIC	N38°29.00'/W090°44.00'
VPLES	ST CHARLES	N38°47.00'/W090°30.00'
VPLIW	SIX FLAGS	N38°30.67'/W090°40.47'
VPLXU	GATEWAY ARCH	N38°37.50'/W090°11.00'
VPNSY	WOOD RIVER REFINERIES	N38°50.00'/W090°05.00'
VPNZY	WENTZVILLE	N38°48.83'/W090°50.98'
VPRAZ	JERSEYVILLE	N39°07.00'/W090°20.00'
VPRMO	FOREST PARK	N38°38.00'/W090°17.00'
VPWKO	COLUMBIA	N38°27.00'/W090°12.00'
VPXXI	MILLSTADT	N38°27.50'/W090°05.68'
VPYID	MOSENTHEIN ISLAND	N38°43.00'/W090°12.25'

SALT LAKE CITY HELICOPTER CHART

VPAIR	SALTAIR	N40°44.85'/W112°11.22'
VPBEE	SOUTH INTERCHANGE	N40°38.18'/W111°54.23'
VPBRN	BARN	N40°54.28'/W112°10.15'
VPCAP	STATE CAPITOL	N40°46.67'/W111°53.25'
VPCHS	_____	N40°42.28'/W112°05.92'
VPCOP	BINGHAM COPPER MINE	N40°31.38'/W112°09.00'
VPCWY	CAUSEWAY	N41°05.37'/W112°07.17'
VP CYN	PARLEYS CANYON	N40°42.67'/W111°48.10'
VPFPC	FREE PORT CENTER	N41°05.92'/W112°02.27'
VPFPK	FRANCIS PEAK	N41°01.98'/W111°50.30'
VPGFS	GARFIELD STACK	N40°43.28'/W112°11.88'
VPHVE	SPAGHETTI BOWL	N40°43.50'/W111°54.22'
VPJRT	JORDAN RIVER TEMPLE	N40°35.02'/W111°55.58'
VPKSL	KSL ANTENNA	N40°46.80'/W112°05.80'
VPLGN	LAGOON AMUSEMENT PARK	N40°59.08'/W111°53.57'
VPMDH	MCKAY DEE HOSPITAL	N41°11.50'/W111°57.08'
VPMMT	MICROWAVE TOWERS	N40°48.50'/W111°53.37'
VPMSH	_____	N41°01.67'/W112°02.47'
VPNSL	_____	N40°50.15'/W111°54.90'
VPNTP	_____	N41°03.57'/W112°14.23'
VPOGE	GRAIN ELEVATOR	N41°13.13'/W112°00.45'
VPOPS	POWER STATION	N41°20.38'/W112°02.78'
VPPEN	STATE PRISON	N40°29.88'/W111°53.62'
VPPPT	PROMONTORY POINT	N41°12.28'/W112°25.73'
VPPTM	POINT OF THE MOUNTAIN	N40°27.42'/W111°54.83'
VPVVO	PROVO CANYON	N40°18.77'/W111°39.45'
VPRWY	_____	N40°48.48'/W112°00.33'
VPSLC	I-15/I-80 INTERCHANGE	N40°45.83'/W111°54.85'
VP TIP	SOUTH TIP	N40°50.93'/W112°10.92'
VPWBR	WEBER CANYON	N41°08.17'/W111°54.83'
VPWBT	_____	N40°38.00'/W112°03.33'

SALT LAKE CITY TERMINAL AREA CHART/FLYWAY CHART

VPAIR	SALTAIR	N40°44.85'/W112°11.22'
VPBEE	SOUTH INTERCHANGE	N40°38.18'/W111°54.23'
VPBRN	BARN	N40°54.28'/W112°10.15'
VPCAP	STATE CAPITOL	N40°46.67'/W111°53.25'
VPCHS	_____	N40°42.28'/W112°05.92'
VPCOP	BINGHAM COPPER MINE	N40°31.38'/W112°09.00'
VPCVI	CENTERVILLE INTERCHANGE	N40°55.30'/W111°53.43'
VPCWY	CAUSEWAY	N41°05.37'/W112°07.17'
VP CYN	PARLEYS CANYON	N40°42.67'/W111°48.10'
VPFPC	FREE PORT CENTER	N41°05.92'/W112°02.27'
VPFPK	FRANCIS PEAK	N41°01.98'/W111°50.30'
VPGFS	GARFIELD STACK	N40°43.28'/W112°11.88'

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPHE	SPAGHETTI BOWL	N40°43.50'/W111°54.22'
VPJRT	JORDAN RIVER TEMPLE	N40°35.02'/W111°55.58'
VPKSL	KSL ANTENNA	N40°46.80'/W112°05.80'
VPLGN	LAGOON AMUSEMENT PARK	N40°59.08'/W111°53.57'
VPMDH	MCKAY DEE HOSPITAL	N41°11.50'/W111°57.08'
VPMMT	MICROWAVE TOWERS	N40°48.50'/W111°53.37'
VPMSH	_____	N41°01.67'/W112°02.47'
VPNSL	_____	N40°50.15'/W111°54.90'
VPNTF	_____	N41°03.57'/W112°14.23'
VPOGE	GRAIN ELEVATOR	N41°13.13'/W112°00.45'
VPOPS	POWER STATION	N41°20.38'/W112°02.78'
VPEN	STATE PRISON	N40°29.88'/W111°53.62'
VPPT	PROMONTORY POINT	N41°12.28'/W112°25.73'
VPPTM	POINT OF THE MOUNTAIN	N40°27.42'/W111°54.83'
VPVPO	PROVO CANYON	N40°18.77'/W111°39.45'
VPRWY	_____	N40°48.48'/W112°00.33'
VPSLC	I-15/I-80 INTERCHANGE	N40°45.83'/W111°54.85'
VPTIP	SOUTH TIP	N40°50.93'/W112°10.92'
VPUOU	U OF U EVENTS CENTER	N40°45.73'/W111°50.28'
VPWBR	WEBER CANYON	N41°08.17'/W111°54.83'
VPWBT	_____	N40°38.00'/W112°03.33'
VPZOO	HOGLE ZOO	N40°45.00'/W111°48.95'

SAN DIEGO TERMINAL AREA CHART/FLYWAY CHART

VPLDP	DANA POINT	N33°27.62'/W117°42.87'
VPLSP	SIGNAL PEAK	N33°36.33'/W117°48.63'
VPOCN	_____	N33°14.15'/W117°26.63'
VPSBC	BARONA CASINO	N32°56.25'/W116°52.60'
VPSBL	_____	N33°05.18'/W117°18.55'
VPSBM	BLACK MOUNTAIN	N32°58.87'/W117°07.00'
VPSCF	_____	N32°48.55'/W117°09.17'
VPSCM	COWLES MOUNTAIN	N32°48.72'/W117°01.97'
VPSCP	CRYSTAL PIER	N32°47.77'/W117°15.42'
VPSCR	_____	N32°39.37'/W117°07.30'
VPSFB	IRON MOUNTAIN	N32°58.25'/W116°57.33'
VPSLJ	LAKE JENNINGS	N32°51.53'/W116°53.28'
VPSMB	_____	N32°45.57'/W117°12.22'
VPSMP	_____	N33°22.70'/W117°36.75'
VPSMS	MOUNT SOLEDAD	N32°50.40'/W117°15.10'
VPSMV	_____	N32°45.75'/W117°09.80'
VPSMW	MOUNT WOODSON	N33°00.52'/W116°58.23'
VPSOP	OTAY MESA PRISON	N32°35.82'/W116°55.28'
VPSOT	LOWER OTAY LAKE	N32°37.73'/W116°55.38'
VPSPL	SOUTH POINT LOMA	N32°39.90'/W117°14.55'
VPSPP	POWER PLANT	N33°08.25'/W117°20.23'
VPSQS	QUALCOMM STADIUM	N32°46.98'/W117°07.23'
VPSRT	DEL MAR RACE TRACK	N32°58.58'/W117°15.95'
VPSSM	SAN MIGUEL MOUNTAIN	N32°41.78'/W116°56.18'
VPSSV	SAN VICENTE ISLAND	N32°55.53'/W116°55.00'
VPSTP	TORREY PINES GOLF COURSE	N32°54.17'/W117°14.68'
VPSVA	_____	N33°11.48'/W117°16.38'

SAN FRANCISCO SECTIONAL CHART

VPKBG	KINGSBURY GRADE	N38°58.75'/W119°53.20'
-------	-----------------	------------------------

SAN FRANCISCO TERMINAL AREA CHART/FLYWAY CHART

VPALT	ALTAMONT PASS	N37°44.35'/W121°35.42'
VPANT	ANTIOCH BRIDGE	N38°01.45'/W121°45.02'
VPBBR	BENICIA BRIDGE	N38°02.50'/W122°07.45'
VPCAL	CALAVERAS RESERVOIR	N37°28.16'/W121°48.93'
VPCBT	LAKE CHABOT	N37°43.68'/W122°06.94'
VPCOY	COYOTE HILLS	N37°32.50'/W122°05.06'
VPCQZ	CARQUINEZ BRIDGE	N38°03.66'/W122°13.52'
VPCRL	_____	N37°11.00'/W121°41.06'
VPCRY	CRYSTAL SPRINGS CAUSEWAY	N37°30.56'/W122°21.10'

WAYPOINT IDENT	COLLOCATED VFR CHECKPOINT	LOCATION
VPCSH	CAL STATE UNIVERSITY	N37°39.52'/W122°03.52'
VPDAM	DEL VALLE DAM	N37°36.91'/W121°44.78'
VPDLR		N37°07.00'/W121°47.06'
VPDUB	DUBLIN	N37°42.06'/W121°55.36'
VPEMB	EMBASSY SUITES	N37°26.05'/W121°53.83'
VPGGF	GOLDEN GATE FIELDS	N37°53.07'/W122°18.71'
VPGIL	GILROY	N37°01.37'/W121°33.99'
VPHHH	HAMILTON	N38°03.58'/W122°30.66'
VPKGO	KGO	N37°31.58'/W122°06.10'
VPLEX	LEXINGTON RESERVOIR	N37°11.66'/W121°59.18'
VPMID	MID-SPAN SAN MATEO BRIDGE	N37°36.28'/W122°11.81'
VPMOR	MORMON TEMPLE	N37°48.46'/W122°11.95'
VPNUM	NUMMI PLANT	N37°29.56'/W121°56.58'
VPPAC		N37°38.00'/W122°32.07'
VPPRU	PRUNEYARD	N37°17.33'/W121°56.01'
VPSAR	SARATOGA	N37°15.26'/W122°02.33'
VPSLA	SLAC/LINEAR ACCELERATOR	N37°24.75'/W122°14.35'
VPSTB	STINSON BEACH	N37°54.45'/W122°40.41'
VPSUN	SUNOL GOLF COURSE	N37°34.85'/W121°53.23'
VPUTC	U.T.C.	N37°13.93'/W121°41.35'
VPWAL	WALNUT CREEK	N37°53.78'/W122°04.30'
VPWAM		N37°30.28'/W122°10.00'
VPWFR	CEMENT PLANT	N37°30.88'/W122°12.26'

TAMPA/ORLANDO TERMINAL AREA CHART/FLYWAY CHART

VPBOV		N27°57.00'/W080°46.75'
VPCNY		N28°30.00'/W080°45.00'
VPDAD	DADE CITY	N28°22.57'/W082°11.25'
VPDFI		N29°00.17'/W081°20.85'
VPDUT		N27°37.70'/W082°09.10'
VPEAR	CLEARWATER BEACH	N27°58.67'/W082°49.83'
VPFFU		N28°57.08'/W081°00.33'
VPGPE	ST PETE BEACH	N27°43.50'/W082°44.67'
VPHUC		N28°19.87'/W082°43.77'
VPKER	LAKE PARKER	N28°04.00'/W081°56.00'
VPLEV		N28°48.00'/W080°52.00'
VPLJA		N29°00.00'/W080°51.00'

WASHINGTON SECTIONAL CHART

VSPACE		N38°07.82'/W076°48.75'
VPAXI		N38°34.57'/W076°20.38'
VPBRA		N36°13.75'/W076°08.08'
VPGCE		N36°03.90'/W076°36.42'
VPWZO		N36°00.87'/W075°40.07'

VOR RECEIVER CHECK VOR RECEIVER CHECKPOINTS AND VOR TEST FACILITIES (VOT)

The use of VOR airborne and ground checkpoints is explained in Aeronautical Information Manual, Basic Flight Information and ATC Procedures.

NOTE: Under columns headed "Type of Checkpoint" & "Type of VOT Facility" G stands for ground. A/ stands for airborne followed by figures (2300) or (1000-3000) indicating the altitudes above mean sea level at which the check should be conducted. Facilities are listed in alphabetical order, in the state where the checkpoints or VOTs are located.

IOWA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd.	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
		AB/ALT			
Burlington (Southeast Iowa Rgnl)	111.4/BRL	A/2500	288	9.6	Over intersection of Rwy 18-36 and 12-30.
Cedar Rapids (The Eastern Iowa)	114.1/CID	G	086	3.9	On runup pad Rwy 27.
	114.1/CID	G	087	2.6	On runup pad Rwy 09.
	114.1/CID	G	092	4	On runup pad Rwy 31.
Dubuque (Dubuque Rgnl)	115.8/DBQ	G	109	0.5	Apch end Rwy 31.
Fort Dodge (Fort Dodge Rgnl)	113.5/FOD	G	118	6.1	On W edge of terminal ramp.
Iowa City (Iowa City Municipal)	116.2/IOW	A/2000	019	8	Over rotg beacon.
Newton (Newton Muni)	112.5/TNU	A/2500	145	8	Over apch end Rwy 32.
Ottumwa (Ottumwa Rgnl)	111.6/OTM	A/2500	303	7.3	Over intersection of Rwy 13-31 and 04-22.
Sheldon (Sheldon Muni)	108.6/DDI	A/2700	098	8.0	Over grain elevator in city of Sanborn.
Spencer (Spencer Muni)	110.0/SPW	G	316	0.7	On painted circle on twy AER 12.
Waterloo (Waterloo Muni)	112.2/ALO	G	304	0.8	Twy B apch end Rwy 12.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Davenport Muni	111.8	G	
Des Moines Intl	109.2	G	

KANSAS

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd.	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
		AB/ALT			
Chanute (Chanute Martin Johnson)	109.2/CNU	A/2000	058	5.6	Over center of N/S rwy.
Emporia (Emporia Muni)	112.8/EMP	A/2700	320	9.0	Over intersection of Hwy 50 and I-35.
Fort Riley (Marshall AAF)	109.4/FRI	G	032	6.8	On parking ramp adjacent to radar antenna.

VOR RECEIVER CHECK

401

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Garden City (Garden City Rgnl)	113.3/GCK	G	359	1.0	Intersection of Twys A and D.
Goodland (Renner Fld/Goodland Muni)	115.1/GLD	G	201	1.2	On parking ramp in front of air terminal.
Hays	110.4/HYS	A/3000	071	12.2	Over grain elevator in Gorham.
Hill City (Hill City Muni)	113.7/HLC	A/4200	060	19.6	Over rtg bcn.
Hutchinson (Hutchinson Rgnl)	116.8/HUT	A/3500	033	5	Over apch end Rwy 04.
Manhattan	110.2/MHK	A/2500	054	3.9	Over water twr.
Manhattan (Manhattan Rgnl)	110.2/MHK	G	197	0.6	0.6 NM parallel twy at B intersection.
	110.2/MHK	G	201	0.9	Twy at Rwy 3 holdline.
Salina (Salina Muni)	117.1/SLN	G	180	7.8	On twy north of Twy E.
Topeka (Philip Billard Muni).....	117.8/TOP	G	215	5.6	East side of terminal ramp.
Wichita (Wichita Mid-Continent)	113.8/ICT	A/3500	216	7.1	Over grain elevator. SW corner of Garden Plains.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Topeka (Forbes Fld)	111.0	G	
Wichita (Wichita Mid-Continent)	114.0	G	

MINNESOTA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Albert Lea (Albert Lea Muni).....	109.8/AEL	G	140	.5	Apch end Rwy 34.
Alexandria (Chandler Fld)	112.8/AXN	A/2600	224	8.3	Over apch end Rwy 22.
Baudette (Baudette Intl)	111.6/BDE	A/2000	277	13.8	Over grain elevator Williams, MN.
Baudette (Baudette Intl)	111.6/BDE	G	310	.8	Rwy 12 runup pad.
Detroit Lakes (Detroit Lakes-Wething Fld) ..	111.2/DTL	A/3000	132	19	Over grain elevator in Perham Mn.
Duluth (Duluth Intl)	112.6/DLH	G	012	2.2	Intersection of Taxiways C and D near Rwy 03 thld.
Ely (Ely Muni)	109.6/ELO	A/2500	266	17.1	Over water tower in 'TOWER MN'.
Fergus Falls	110.4/FFM	A/2500	126	7.5	Over underpass intersection of 2 hws.
Flying Cloud	117.7/FCM	A/2000	278	6.0	Over Chaska water tower.
Gopher (Crystal)	117.3/GEP	A/1900	166	4.9	Over apch end Rwy 14L.
International Falls	111.0/INL	A/2200	135	11.0	Over highway bridge over railroad track.
International Falls (Falls Intl)	111.0/INL	G	113	0.6	On taxiway apch end Rwy 31.
Mankato (Mankato Rgnl).....	110.8/MKT	G	317	.9	Twy A4 AER 15.
Marshall	111.0/MML	A/2700	308	9.6	Over grain elevator at Minneota.
Montevideo (Montevideo-Chippewa Co).....	111.6/MVE	A/2000	105	11.1	Over grain elevator straddling train tracks.

VOR RECEIVER CHECK

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Park Rapids (Park Rapids Muni)	110.6/PKD	G	322	.6	On twy AER 13.
Rochester (Rochester Intl)	112.0/RST	A/3000	024	8.8	Over intersection of Rwy's 02-20 and 13-31.
Roseau	108.8/ROX	A/2400	178	6.5	Over microwave twr.
Saint Cloud (St Cloud Rgnl)	112.1/STC	G	291	0.5	Runup area AER 13.
Worthington	110.6/OTG	A/2800	050	5.6	Over grain elevator Brewster.

VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Minneapolis (Minneapolis St. Paul Intl/Wold Chamberlain)	111.0	G	Usable airborne 2500-4000' MSL within a 15 NM radius of VOT.
St Paul (St Paul Downtown Holman Fld)	114.4	G	

MISSOURI

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Butler	115.9/BUM	A/1800	035	9.2	Grain elevator. VOR Checkpoint unusable.
Cape Girardeau (Cape Girardeau Rgnl)	112.9/CGI	G	112	.6	On Twy C1 N of Twy C.
Forney (Waynesville-St Robert Rgnl Forney Fld)	110.0/TBN	G	173	0.53	On N edge of Army ramp.
Kirkville	114.6/IRK	A/2500	136	7.4	Over water tank at La Plata. Checkpoint unusable.
Kirkville (Kirkville Rgnl)	114.6/IRK	G	132	3.4	On twy just W of terminal area.
Malden	111.2/MAW	A/1500	351	13.4	Over intersection of Rwy's 18-36 and 04-22 of Dexter Muni Arpt.
Neosho (Joplin Muni)	117.3/EOS	A/2500	344	19	Over apch end Rwy 31.
Saint Joseph (Rosecrans Mem)	115.5/STJ	A/2500	167	10.7	Over apch end Rwy 17.
Springfield (Springfield-Branson Natl)	116.9/SGF	G	193	6.8	At E end of Twy B.
Sunshine (Lee C Fine Mem)	108.4/SHY	A/2500	353	9	Highway bridge over Osage River.

VOR RECEIVER CHECK VOR TEST FACILITIES (VOT)

403

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Jefferson City (Jefferson City Mem)	112.0	G	
Kansas City (Downtown)	108.6	G	
St. Louis (Lambert–St Louis Intl)	111.0	G	
Spirit of St. Louis	112.2	G	

NEBRASKA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Ainsworth	112.7/ANW	A/3600	090	13.0	Over grain elevator south edge at Long Pine.
Alliance	111.8/AIA	A/5000	310	12.1	Over grain elevator 1 NM SE of Berea.
Beatrice	110.6/BIE	A/2400	046	6.1	Over 260' AGL antenna.
Chadron (Chadron Muni)	113.4/CDR	A/4500	017	19	Over intersection of Rwy 20 and 29.
Columbus	112.2/OLU	A/2500	082	12.7	Over bridge/railroad tracks at center of Schuyler.
Columbus (Columbus Muni)	112.2/OLU	G	167	0.5	On twy at apch end Rwy 32.
Grand Island (Central Nebraska Rgnl)	112.0/GRI	G	177	1.5	On parallel twy at AER 35.
Hastings	108.8/HSI	A/3200	266	8.1	Bridge over railroad.
Hastings (Hastings Muni).....	108.8/HSI	G	330		Apch end Rwy 14.
Kearney (Kearney Muni)	111.2/EAR	G	211	0.5	South end of main ramp.
		G	319	0.5	North end of main ramp.
Lincoln (Lincoln)	116.1/LNK	G	176	4.9	On runup ramp for Rwy 35.
Norfolk	109.6/OFK	A/2600	098	10.0	Bridge over river south at Stanton.
Norfolk (Karl Stefan Mem)	109.6/OFK	G	144	0.5	On runup pad for Rwy 31.
North Platte (North Platte Rgnl Airport Lee Bird Field)	117.4/LBF	G	013	5.5	On S edge of ramp 200' N of Twy B.
O'Neill	113.9/ONL	A/3000	119	13	Over triangle in road intersection.
Omaha (Eppley Airfield)	116.3/OVR	A/2500	310	10.2	Over apch end Rwy 32L.
Scottsbluff (William B. Heilig Fld)	112.6/BFF	G	240	5.1	On NE edge ramp opposite terminal bldg & W of twy to Rwy 30.
Searle (Searle Field)	110.2/SAE	A/4800	030	7.2	Over flood-ctl spillway SE end of Lake McConaughy.
Thedford (Thomas Co)	108.6/TDD	A/4000	090		Over apch end Rwy 11.

VOR RECEIVER CHECK VOR TEST FACILITIES (VOT)

Facility Name (Airport Name)	Freq.	Type VOT Facility	Remarks
Omaha (Eppley Airfield)	109.0	G	

NORTH DAKOTA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Bismarck (Bismarck Muni)	116.5/BIS	G	262	3.0	On Twy C5.
Dickinson (Dickinson–Theodore Roosevelt Rgnl)	112.9/DIK	G	182	3.7	Twy B near ramp.
Fargo (Hector Intl)	116.2/FAR	A/2000	360	9.4	Over apch end Rwy 36.
Grand Forks (Grand Forks Intl)	114.3/GFK	G	157	1.0	On twy A5.
Jamestown (Jamestown Rgnl)	114.5/JMS	G	141	0.6	On twy strip adjacent to Rwy 31.
Minot	117.1/MOT	A/2800	091	6.5	Over railroad and highway overpass.

SOUTH DAKOTA

VOR RECEIVER CHECKPOINTS

Facility Name (Arpt Name)	Freq/Ident	Type Check Pt. Gnd. AB/ALT	Azimuth from Fac. Mag	Dist. from Fac. N.M.	Checkpoint Description
Brookings	108.8/BKX	A/3000	072	7.5	Over grain elevator.
Mitchell (Mitchell Muni)	109.2/MHE	A/2500	238	11.0	Over intersection of highways ½ NM south of town of Mt. Vernon.
	109.2/MHE	G	194	0.5	On main ramp.
Phillip	108.4/PHP	A/3300	156	4.7	Over radio twr.
Pierre (Pierre Rgnl)	112.5/PIR	G	251	5.5	On twy in front of terminal building. VOR Checkpoint unusable.
Rapid City (Rapid City Rgnl)	112.3/RAP	G	320	4.5	On ramp in front of administration building adjacent to center twy.
Sioux Falls	115.0/FSD	A/2500	009	6.9	Over water twr in Baltic S.D.
Sioux Falls (Joe Foss Field)	115.0/FSD	G	143	4.3	At intersection of E/W twy and east ramp.
Watertown (Watertown Muni)	116.6/ATY	G	184	3.8	On SE corner of terminal ramp.
Winner	112.8/ISD	A/3100	204	8.6	Over blue water tank S edge of town.

PARACHUTE JUMPING AREAS

405

The following tabulation lists all reported parachute jumping sites in the area of coverage of this directory. Unless otherwise indicated, all activities are conducted during daylight hours and under VFR conditions. The busiest periods of activity are normally on weekends and holidays, but jumps can be expected at anytime during the week at the locations listed. Jumps within restricted airspace are not listed.

All times are local and altitudes MSL unless otherwise specified.

Contact facility and frequency is listed at the end of the remarks, when available, in bold face type.

Refer to Federal Aviation Regulations Part 105 for required procedures relating to parachute jumping.

Organizations desiring listing of their jumping activities in this publication should contact the nearest FSS, tower or ARTCC.

Qualified parachute jumping sites will be depicted on the appropriate visual chart(s).

Note: (c) in this publication indicates that the parachute jump area is charted.

To qualify for charting, a jump area must meet the following criteria:

- (1) Been in operation for at least 1 year.
- (2) Operate year round (at least on weekends).
- (3) Log 4,000 or more jumps each year.

In addition, jump sites can be nominated by FAA Regions if special circumstances require charting.

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
IOWA			
(c) Boone Muni Arpt	37 NM; 293° Newton	15,000	6 NM radius. Continuous.
(c) Cherokee Co Rgnl	30 NM; 206° Spencer	12,500	5 NM radius. Summer continuous, winter weekends and holidays SR-SS
(c) Dallas Center, Husband Field	25 NM; 305° Des Moines	12,800	3 NM radius. Weekends and holidays
Davenport	13 NM; 258° Davenport	12,500	2 NM radius. Daily
Decorah Arpt	15 NM; 264° Waukon	7,000 AGL	Summer. Tue-Thu 1700-SS, Sat-Sun 1000-SS. Winter. 1000-SS Sat, Sun.
Fairfield Muni Arpt	16 NM; 079° Ottumwa	12,500	5 NM radius. Sat, Sun and holidays SR-SS.
Marion Arpt	14 NM; 047° Cedar Rapids	15,000 AGL	3 NM radius. Continuous.
(c) New Hampton Muni Arpt	32 NM; 359° Waterloo	15,000 AGL	1 NM radius. Daily.
(c) Northwood Muni Arpt	22 NM; 010° Mason City	11,500	5 NM radius. Apr-Oct, Sat-Sun SR-SS.
Perry Muni	33 NM; 310° Des Moines	12,500	3 NM radius. Weekends and holidays
Sioux City	13 NM; 285° Sioux City	10,000	0.5 NM radius. 0800-2000 daily
(c) Vinton Veterans Mem Airpark Arpt...	24 NM; 330° Cedar Rapids	15,000	5 NM radius. Continuous.
(c) Waterloo, Flyers Arpt	10 NM; 140° Waterloo	12,000	3 NM radius. Summer continuous, winter weekends and holidays SR-SS.
(c) Winterset-Madison Co Arpt	17 NM; 248° Des Moines	14,000	5 NM radius. SR-SS daily.
KANSAS			
Atchison, Amelia Earhart Arpt	26.2 NM; 199° St Joseph	12,500	5 NM radius. Continuous.
(c) Baldwin City, Vinland Valley Aerodrome Arpt	24 NM; 130° Topeka	13,000	5 NM radius. Sat-Sun Continuous.
(c) Derby, Cook Airfield Inc.	23 NM; 110° Wichita	13,500	5 NM radius. Daily.
(c) Junction City, Ft. Riley, Marshall AAF	6.3 NM; 034° Ft. Riley	10,000	1 NM radius. Daily SR-SS
(c) Kingman, Kingman Arpt-Clyde Cessna Fld	22 NM; 195° Hutchinson	15,000	1 NM radius. Fri, Sat, Sun and holidays, SR-SS.
(c) Lyons-Rice Co Muni Arpt	24.7 NM; 317° Hutchinson	14,000	5 NM radius. Continuous.
Osage Muni	26 NM; 030° Emporia	12,000	2 NM radius. Sat-Sun, SR-SS.
St Francis, Cheyenne County Muni	22.9 NM; 336° Goodland	16,000	3 NM radius Continuous.
Salina	20 NM; 247° Salina	2,700	0.3 NM radius. Occasional use
(c) Suppesville	18 NM; 200° Wichita	15,000	5 NM radius. Sat-Sun and holidays, SR-SS.
(c) Topeka, Mesa Verde Arpt	9 NM; 267° Topeka	13,000 AGL	2 NM radius weekdays 1600-SS weekdays SR-SS weekends and holidays.
(c) Wamego Muni Arpt	19.4 NM; 075° Manhattan	11,000	5 NM radius. Continuous.
Wichita, Maize Arpt	7 NM; 070° Wichita	11,500	1 NM radius. Continuous.
(c) Wichita, Sauerman Field	14NM; 253° Wichita	13,000	5 NM radius. Continuous.

PARACHUTE JUMPING AREAS

LOCATION	DISTANCE AND RADIAL FROM NEAREST VOR/VORTAC	MAXIMUM ALTITUDE	REMARKS
MINNESOTA			
Duluth	5 NM; 120° Duluth	10,000	Jun–Aug, Fridays 1800–2030
(c) Hutchinson Muni—Butler Fld Arpt ...	14 NM; 160° Darwin	13,000	5 NM radius. 0800–2359 daily.
Waseca Muni	11 NM; 223° Halfway	15,000	5 NM radius. Continuous.
MISSOURI			
(c) Butler Mem Arpt	7 NM; 074° Butler	13,000	5 NM radius. Sat–Mon 0500–2200.
(c) Charleston, Mississippi Co Arpt	25 NM; 150° Cape Girardeau	13,000	2 NM radius SR–SS weekends and holidays.
(c) Elton Hensley Mem Arpt	10 NM; 078° Columbia	12,000	5 NM radius. Daily 0700–1900.
(c) Kimberling Airways Arpt	22 NM; 323° Harrison	10,000	2 NM radius. SR–SS Mon–Sat.
(c) Lexington Muni Arpt	13 NM; 048° Napoleon	12,500 AGL	SR–SS Sat, Sun, holidays & weekday evenings.
(c) Mt Vernon Muni Arpt	31.5 NM; 235° Springfield	15,000	2 NM radius. Daily SR–SS. Springfield–Branson Natl Twr 124.95
Neosho	28.7 NM; 337° Neosho	10,000	
(c) Sullivan Rgnl Arpt	26 NM; 073° Vichy	15,000	5 NM radius. SR–SS weekends. Occasional ngt and weekdays.
NEBRASKA			
(c) Blair Muni Arpt	23 NM; 310° Omaha	14,000	2 NM radius. Sat–Sun SR–SS. Omaha App/Dep Con 120.1
(c) Crete Muni Arpt	22 NM; 195° Lincoln	14,500	2 NM radius. Continuous. Lincoln App/Dep Con 124.0 (1130–0600Z) Mineapolis Center 128.75 (0600–1130Z)
Mc Cook Rgnl Arpt	2 NM; 363° Mc Cook	10,500	2 NM radius Mon–Fri 1600–SS and Sat–Sun 0800–SS.
(c) Weeping Water, Browns Arpt	27 NM; 090° Lincoln	14,000	3 NM radius. Apr–Oct, SR–30 min after SS, daily; Oct–Apr, SR–30 min after SS, weekends and Federal holidays.
NORTH DAKOTA			
(c) West Fargo Muni Arpt	9 NM; 335° Fargo	13,500	1 NM radius. SR–SS Weekends. Occasional nights and weekdays.

**INTENTIONALLY
LEFT
BLANK**

**INTENTIONALLY
LEFT
BLANK**

The purpose of this bulletin is to provide major changes in aeronautical information that have occurred since the last publication date of each Sectional Aeronautical, VFR Terminal Area, and Helicopter Route Charts listed. The general policy is to include only those changes to controlled airspace and special use airspace that present a hazardous condition or impose a restriction on the pilot, and major changes to airports and radio navigational facilities, thereby providing the VFR pilot with the essential data necessary to update and maintain chart currency. The data is grouped by type and then by effective date. When a new edition of the Aeronautical Chart is published, the corrective tabulation will be removed from this bulletin. Inasmuch as this Bulletin provides major changes only, pilots should consult the airport listing in this directory for all new information. Users of U.S. World Aeronautical Charts (WAC) and U.S. Gulf Coast VFR Aeronautical Charts should consult the appropriate Sectional and VFR Terminal Area Charts for revisions.

Military Training Routes (MTRs) are shown on Sectional Aeronautical Charts, VFR Terminal Area, and Helicopter Route Charts. Only the route centerline, direction of flight and the route designator are shown — route widths and altitudes are not shown. Since these routes are subject to change every 56 days and the charts are reissued generally every 6 months, routes with a change in the alignment of the charted route centerline will be listed in this Aeronautical Chart Bulletin below. You are advised to contact the nearest FSS for route dimensions and current status for those routes affecting your flight.

BILLINGS SECTIONAL

79th Edition, 11 Mar 2010

OBSTRUCTIONS

8 Apr 2010 Add obst 3780' MSL (350' AGL) UC, 45°30'43"N, 104°28'25"W.

3 Jun 2010 Add obst 3043' MSL (407' AGL) UC, 46°30'53"N, 102°51'43"W.

Add obst 2288' MSL (315' AGL) UC, 48°52'57"N, 102°34'09"W.

Add obst 2545' MSL (266' AGL) UC, 47°06'59"N, 101°47'04"W.

Add obst 2418' MSL (266' AGL) UC, 47°20'09"N, 102°20'04"W.

Add obst 2811' MSL (340' AGL) UC, 48°32'54"N, 102°55'18"W.

Add obst 2221' MSL (240' AGL) UC, 48°53'41"N, 103°17'11"W.

Add obst 2490' MSL (340' AGL) UC, 48°34'57"N, 103°28'33"W.

Add obst 2364' MSL (340' AGL) UC, 48°52'44"N, 103°00'44"W.

Add obst 2696' MSL (340' AGL) UC, 48°35'52"N, 103°11'17"W.

Add obst 2328' MSL (349' AGL) UC, 47°11'04"N, 100°50'48"W.

Add obst 3361' MSL (308' AGL) UC, 45°49'40"N, 103°22'33"W.

AIRPORTS

8 Apr 2010 Change CTAF freq. 122.9 to 122.8 at SOUTH BIG HORN COUNTY arpt, 44°31'00"N, 108°04'58"W.

Add CTAF freq. 122.8 at POPLAR MUNI arpt, 48°08'04"N, 105°09'43"W.

3 Jun 2010 No Major Changes.

NAVAIDS

8 Apr 2010 – 3 Jun 2010 No Major Changes.

AIRSPACE

8 Apr 2010 – 3 Jun 2010 No Major Changes.

SPECIAL USE AIRSPACE

8 Apr 2010 – 3 Jun 2010 No Major Changes.

MILITARY TRAINING ROUTES

8 Apr 2010 – 3 Jun 2010 No Major Changes.

MISCELLANEOUS

8 Apr 2010 – 3 Jun 2010 No Major Changes.

CHEYENNE SECTIONAL

81st Edition, 14 Jan 2010

OBSTRUCTIONS

11 Feb 2010 Add obst 4844' MSL (350' AGL) UC, 40°21'23"N, 104°08'48"W.

Add obst 6184' MSL (390' AGL) UC, 43°02'26"N, 105°58'50"W.

8 Apr 2010 Add obst 5024' MSL (367' AGL) UC, 44°11'51"N, 106°16'13"W.

Add windmill farm. 7643' UC is highest MSL, 41°39'33"N, 106°03'26"W.

Add windmill farm. 6269' UC is highest MSL, 43°01'45"N, 106°00'03"W.

Add obst 4749' MSL (500' AGL) UC, 44°23'17"N, 105°27'34"W.

Add obst 2485' MSL (306' AGL) UC, 44°02'17"N, 101°41'15"W.

Add obst 7189' MSL (270' AGL) UC, 41°40'47"N, 107°03'49"W.

Add obst 5832' MSL (300' AGL) UC, 43°18'20"N, 107°41'37"W.

Add obst 8603' MSL (270' AGL) UC, 41°31'41"N, 107°22'18"W.

Add obst 5591' MSL (389' AGL) UC, 42°53'04"N, 106°13'59"W.

Add obst 7062' MSL (407' AGL) UC, 41°08'21"N, 105°01'30"W.

Add obst 4489' MSL (350' AGL) UC, 41°31'40"N, 103°13'48"W.

3 Jun 2010 Add obst 4652' MSL (499' AGL) UC, 41°54'28"N, 103°28'36"W. Add obst 4015' MSL

(488' AGL) UC, 43°36'43"N, 103°17'58"W. Add obst 3515' MSL (308' AGL) UC, 43°13'23"N, 102°29'01"W.

Add obst 3258' MSL (306' AGL) UC, 44°06'38"N, 102°49'13"W. Add obst 6044' MSL (1190' AGL),

40°02'01"N, 103°56'19"W.

AIRPORTS

11 Feb 2010 No Major Changes.

8 Apr 2010 Change CTAF 122.9 to 122.8 at SOUTH BIG HORN CO arpt, 44°31'01"N, 108°04'58"W.

3 Jun 2010 Change CTAF 122.8 to 122.9 at SOUTH BIG HORN CO arpt, 44°31'01"N, 108°04'58"W.

NAVAIDS

11 Feb 2010 – 8 Apr 2010 No Major Changes.

3 Jun 2010 Delete SINCLAIR NDB, 41°48'07"N, 107°05'32"W.

AIRSPACE

11 Feb 2010 Revise RIVERTON, WY Class E: That airspace extending upward from 700 feet above the surface within an 8.7-mile radius of the Riverton Regional Airport and within 4 miles each side of the Riverton VOR/DME 291° radial extending from the 8.7-mile radius to 16.6 miles west of the VOR/DME, and within 3.1 miles each side of the Riverton VOR/DME 123° radial extending from the 8.7-mile radius to 10.5 miles southeast of the VOR/DME; that airspace extending upward from 1200 feet above the surface within a 21.8-mile radius of the Riverton VOR/DME within 8.7 miles east and 6.1 miles west of the Riverton VOR/DME 016° radial extending from the 21.8-mile radius to 33.1 miles north of the VOR/DME, and within 6.1 miles northeast and 12.7 miles southwest of the Riverton VOR/DME 301° radial extending from the 21.8-mile radius to 32.2 miles northwest of the VOR/DME, on the east within an area bounded by a point beginning at 42°56'30"N, 107°59'45"W; to 42°54'53"N, 107°44'31"W; to 42°42'35"N, 107°53'00"W; to 42°49'00"N, 108°06'00"W; thence to the point of beginning.

8 Apr 2010 No Major Changes.

3 Jun 2010 Revise RAWLINS, WY Class E: That airspace extending upward from 700 feet above the surface within a 7.9-mile radius of the Rawlins Municipal/Harvey Field Airport, and within 4.3 miles each side of the 090° bearing from the Rawlins Municipal/Harvey Field Airport extending from the Airport to 15 miles east; that airspace extending upward from 1,200 feet above the surface beginning at lat.

41°30'20"N., long. 107°59'26"W.; to lat. 41°51'51"N., long. 108°04'00"W.; lat. 41°55'28"N., long. 107°32'00"W.; to lat. 42°20'33"N., long. 107°07'43"W.; to lat. 42°02'42"N., long. 106°33'00"W.; to lat. 41°52'00"N., long. 106°42'00"W.; to lat. 41°45'00"N., long. 106°41'00"W.; to lat. 41°28'21"N., long. 106°37'13"W.; to lat. 41°36'20"N., long. 107°08'23"W.; to the point of the beginning.

SPECIAL USE AIRSPACE

11 Feb 2010 – 3 Jun 2010 No Major Changes.

MILITARY TRAINING ROUTES

11 Feb 2010 – 3 Jun 2010 No Major Changes.

MISCELLANEOUS

11 Feb 2010 – 8 Apr 2010 No Major Changes.

3 Jun 2010 Change MEF 4⁸ to 4⁹ in quadrant 41°00'00"N, 103°00'00"W.

Change MEF 5⁴ to 6² in quadrant 40°00'00"N, 104°00'00"W.

CHICAGO SECTIONAL
80th Edition, 6 May 2010**OBSTRUCTIONS**

3 Jun 2010 Add windmill farm. 1242' is highest MSL UC, 40°51'29"N, 89°06'25"W.

Add obst 1025' MSL (260' AGL) UC, 41°21'32"N, 90°34'50"W.

Add obst 1464' MSL (305' AGL), 43°34'09"N, 90°39'20"W.

Add obst 1116' MSL (260' AGL) UC, 43°53'29"N, 89°19'41"W.

Add obst 1113' MSL (320' AGL) UC, 43°57'07"N, 89°12'45"W.

Add obst 1000' MSL (288' AGL) UC, 41°06'49"N, 91°51'52"W.

Add obst 1135' MSL (255' AGL) UC, 41°58'18"N, 91°22'46"W.

Add obst 1205' MSL (310' AGL) UC, 42°37'49"N, 85°11'57"W.

AIRPORTS

3 Jun 2010 No Major Changes.

NAVAIDS

3 Jun 2010 Change WOLF LAKE VOR to WEBSTER LAKE VOR, 41°14'49"N, 85°29'51"W.

AIRSPACE

3 Jun 2010 Revise CEDAR RAPIDS, IA Class E. That airspace within a 5 mile radius of the Eastern Iowa Airport. This Class E airspace area is effective during specific dates and times established in advance by a Notice to Airmen. The effective date and time will thereafter be continuously published in the Airport/Facility Directory.

SPECIAL USE AIRSPACE

3 Jun 2010 No Major Changes.

MILITARY TRAINING ROUTES

3 Jun 2010 No Major Changes.

MISCELLANEOUS

3 Jun 2010 No Major Changes.

GREEN BAY SECTIONAL
80th Edition, 3 Jun 2010**OBSTRUCTIONS**

3 Jun 2010 No Major Changes.

AIRPORTS

3 Jun 2010 No Major Changes.

NAVAIDS

3 Jun 2010 No Major Changes.

AIRSPACE

3 Jun 2010 No Major Changes.

SPECIAL USE AIRSPACE

3 Jun 2010 No Major Changes.

MILITARY TRAINING ROUTES

3 Jun 2010 No Major Changes.

MISCELLANEOUS

3 Jun 2010 No Major Changes.

KANSAS CITY SECTIONAL

84th Edition, 3 Jun 2010

OBSTRUCTIONS

3 Jun 2010 No Major Changes.

AIRPORTS

3 Jun 2010 No Major Changes.

NAVAIDS

3 Jun 2010 No Major Changes.

AIRSPACE

3 Jun 2010 No Major Changes.

SPECIAL USE AIRSPACE

3 Jun 2010 No Major Changes.

MILITARY TRAINING ROUTES

3 Jun 2010 No Major Changes.

MISCELLANEOUS3 Jun 2010 No Major Changes.

KANSAS CITY TERMINAL AREA CHART

71st Edition, 3 Jun 2010

OBSTRUCTIONS

3 Jun 2010 No Major Changes.

AIRPORTS

3 Jun 2010 No Major Changes.

NAVAIDS

3 Jun 2010 No Major Changes.

AIRSPACE

3 Jun 2010 No Major Changes.

SPECIAL USE AIRSPACE

3 Jun 2010 No Major Changes.

MILITARY TRAINING ROUTES

3 Jun 2010 No Major Changes.

MISCELLANEOUS3 Jun 2010 No Major Changes.

MEMPHIS SECTIONAL

84th Edition, 8 Apr 2010

OBSTRUCTIONS**8 Apr 2010** No Major Changes.**3 Jun 2010** Add obst 777' MSL (311' AGL) UC, 33°17'12"N, 89°24'53"W.

Add obst 784' MSL (351' AGL) UC, 32°36'58"N, 89°15'23"W.

Change obst from 763' MSL (383' AGL) to 875' MSL (495' AGL), 33°07'23"N, 93°59'52"W.

Add obst 478' MSL (260' AGL) UC, 35°13'47"N, 90°20'16"W.

Add obst 654' MSL (350' AGL) UC, 32°47'36"N, 89°51'03"W.

Add obst 601' MSL (301' AGL), 35°06'55"N, 89°56'36"W.

Add obst 439' MSL (335' AGL) UC, 32°55'35"N, 91°40'19"W.

Add obst 478' MSL (260' AGL), 35°13'47"N, 90°20'16"W.

AIRPORTS**8 Apr 2010 – 3 Jun 2010** No Major Changes.**NAVAIDS****8 Apr 2010** No Major Changes.**3 Jun 2010** Delete KOSCIUSKO NDB, 33°05'27"N, 89°32'25"W.

Delete CLARKSDALE NDB, 34°17'35"N, 90°30'56"W.

Delete ASH FLAT NDB, 36°10'50"N, 91°36'23"W.

AIRSPACE**8 Apr 2010 – 3 Jun 2010** No Major Changes.**SPECIAL USE AIRSPACE****8 Apr 2010 – 3 Jun 2010** No Major Changes.**MILITARY TRAINING ROUTES****8 Apr 2010 – 3 Jun 2010** No Major Changes.**MISCELLANEOUS****8 Apr 2010 – 3 Jun 2010** No Major Changes.

MINNEAPOLIS-ST. PAUL TERMINAL AREA CHART

73rd Edition, 14 Jan 2010

OBSTRUCTIONS**11 Feb 2010 – 3 Jun 2010** No Major Changes.**AIRPORTS****11 Feb 2010** Delete RP 4, 22 at MAPLE LAKE arpt, 45°14'10"N, 93°59'08"W.**8 Apr 2010** Change FLYING CLOUD ATCT freq from 118.1 to 119.15, 44°49'38"N, 93°27'30"W.**3 Jun 2010** Change CTAF 118.1 to 119.15 at FLYING CLOUD arpt, 44°49'39"N, 93°27'31"W.

Delete BUFFALO LAKE spb, 45°09'44"N, 93°54'38"W.

NAVAIDS**11 Feb 2010** Change FLYING CLOUD VOR/DME position from 44°49'33"N, 93°27'24"W to 44°49'31"N, 93°26'34"W. Raise all outbound bearings from FLYING CLOUD VOR/DME by 6 degrees, 44°49'31"N, 93°26'34"W.**8 Apr 2010** Change FLYING CLOUD VOR/DME freq from 111.8 to 117.7, 44°49'32"N, 93°27'24"W.**3 Jun 2010** No Major Changes.**AIRSPACE****11 Feb 2010** Add MANKATO, MN Class E: That airspace extending upward from 700 feet above the surface within a 7-mile radius of Mankato Regional Airport, and within 2 miles each side of the 047° bearing from the airport extending from the 7-mile radius to 8 miles northeast of the airport; and within 4 miles each side of the 020° bearing from the airport extending from the 7-mile radius to 11 miles north of the airport; and within a 6-mile radius of the point in space serving Immanuel-St. Joseph's Hospital, 44°09'48"N, 93°57'40"W.**8 Apr 2010 – 3 Jun 2010** No Major Changes.**SPECIAL USE AIRSPACE****11 Feb 2010 – 3 Jun 2010** No Major Changes.**MILITARY TRAINING ROUTES****11 Feb 2010 – 3 Jun 2010** No Major Changes.**MISCELLANEOUS****11 Feb 2010 – 3 Jun 2010** No Major Changes.

OMAHA SECTIONAL

81st Edition, 11 Feb 2010

OBSTRUCTIONS**11 Feb 2010** No Major Changes.**8 Apr 2010** Add obst 2180' MSL (1000' AGL) UC, 40°48'04"N, 94°54'07"W.

Add obst 1892' MSL (356' AGL) UC, 41°54'40"N, 95°17'22"W.

Add obst 1693' MSL (305' AGL) UC, 44°21'31"N, 97°51'14"W.

Add obst 1718' MSL (350' AGL) UC, 42°48'54"N, 98°11'28"W.

Add obst 2078' MSL (300' AGL) UC, 43°52'11"N, 99°35'57"W.

Add obst 1624' MSL (398' AGL) UC, 42°18'04"N, 93°27'37"W.

Add obst 1969' MSL (327' AGL) UC, 43°58'53"N, 96°25'10"W.

3 Jun 2010 Add obst 1613' MSL (385' AGL) UC, 42°22'56"N, 94°40'16"W.

Add obst 1411' MSL (259' AGL) UC, 42°26'34"N, 94°20'05"W.

Add obst 2557' MSL (350' AGL) UC, 42°57'48"N, 99°17'06"W.

Add obst 1388' MSL (330' AGL) UC, 40°14'27"N, 92°56'41"W.

Add obst 2299' MSL (262' AGL) UC, 44°28'26"N, 99°09'01"W.

AIRPORTS**11 Feb 2010 – 8 Apr 2010** No Major Changes.**3 Jun 2010** Change CTAF freq. 122.95 to 123.0 at FORT DODGE RGNL arpt, 42°33'04"N, 94°11'30"W.**NAVAIDS****11 Feb 2010** No Major Changes.**8 Apr 2010** Delete PILOT ROCK NDB, 42°43'54"N, 95°33'11"W.**3 Jun 2010** No Major Changes.**AIRSPACE****11 Feb 2010** No Major Changes.**8 Apr 2010** Revise RED OAK, IA Class E: That airspace extending upward from 700 feet above the surface within a 6.4-mile radius of Red Oak Municipal Airport; and within 2 miles each side of the 354° bearing from the airport extending from the 6.4-mile radius to 11 miles north of the airport; and within 2.6 miles each side of the 326° bearing from the Red Oak NDB extending from the 6.4-mile radius to 8.3 miles northwest of the airport.**3 Jun 2010** Add LUVERNE, MN. Class E: That airspace extending upward from 700 feet above the surface within a 6.4-mile radius of Quentin Aanenson Field Airport.**SPECIAL USE AIRSPACE****11 Feb 2010 – 3 Jun 2010** No Major Changes.**MILITARY TRAINING ROUTES****11 Feb 2010 – 3 Jun 2010** No Major Changes.**MISCELLANEOUS****11 Feb 2010** No Major Changes.**8 Apr 2010** Change MEF 1⁸ to 2³ in quadrant 40°30'–41°00'N, 94°30'–95°00'W.**3 Jun 2010** No Major Changes.

ST. LOUIS SECTIONAL

81st Edition, 17 Dec 2009

OBSTRUCTIONS**17 Dec 2009** No Major Changes.**11 Feb 2010** Add obst 1097' MSL (275' AGL) UC, 39°03'46"N, 84°59'04"W.

Add obst 1410' MSL (630' AGL) UC, 40°03'14"N, 85°59'22"W.

Change obst from 827' MSL (243' AGL) to 882' MSL (300' AGL), 38°44'06"N, 89°57'02"W.

Add obst 738' MSL (226' AGL) UC, 38°11'11"N, 89°40'09"W.

Add obst 722' MSL (260' AGL) UC, 38°17'56"N, 89°59'34"W.

Add obst 692' MSL (260' AGL) UC, 37°15'35"N, 88°58'50"W.

Add obst 851' MSL (349' AGL) UC, 38°45'25"N, 89°06'09"W.

Add obst 756' MSL (275' AGL) UC, 38°32'04"N, 89°31'26"W.

Add obst 865' MSL (220' AGL), 39°17'43"N, 88°00'03"W.

Add obst 1200' MSL (237' AGL) UC, 39°12'34"N, 86°38'31"W.

Add obst 917' MSL (227' AGL) UC, 37°53'08"N, 86°03'40"W.

Add obst 1003' MSL (258' AGL) UC, 40°12'40"N, 88°44'43"W.

Add obst 851' MSL (258' AGL) UC, 39°55'55"N, 89°40'00"W.

Add obst 888' MSL (258' AGL) UC, 39°40'32"N, 89°50'15"W.

Add obst 1265' MSL (315' AGL) UC, 37°45'31"N, 90°46'15"W.

Add obst 868' MSL (258' AGL) UC, 39°58'06"N, 89°43'48"W.

Add obst 879' MSL (258' AGL) UC, 39°56'42"N, 89°55'56"W.

Add obst 838' MSL (258' AGL) UC, 39°50'25"N, 89°48'10"W.

Add obst 885' MSL (258' AGL) UC, 39°02'32"N, 89°53'08"W.

Add obst 887' MSL (258' AGL) UC, 39°04'50"N, 89°48'26"W.

8 Apr 2010 Add obst 1164' MSL (400' AGL) UC, 40°10'06"N, 89°05'56"W.

Add obst 1566' MSL (204' AGL) UC, 37°39'55"N, 83°57'21"W.

Add obst 817' MSL (300' AGL) UC, 38°37'03"N, 86°42'35"W.

Add obst 1142' MSL (295' AGL) UC, 38°45'58"N, 84°53'45"W.

Add obst 1022' MSL (256' AGL) UC, 37°30'50"N, 86°25'55"W.

Add obst 703' MSL (258' AGL) UC, 38°15'24"N, 89°03'24"W.

Add obst 900' MSL (250' AGL) UC, 40°06'39"N, 90°33'35"W.

Add obst 1385' MSL (279' AGL) UC, 36°10'15"N, 84°02'17"W.

Add obst 712' MSL (280' AGL) UC, 36°40'56"N, 88°44'19"W.

Add obst 1578' MSL (235' AGL) UC, 36°52'32"N, 84°12'59"W.

Add obst 1409' MSL (255' AGL) UC, 36°46'20"N, 84°45'59"W.

Add obst 863' MSL (280' AGL) UC, 37°48'34"N, 85°34'52"W.

Add obst 1133' MSL (299' AGL) UC, 38°20'55"N, 85°02'02"W.

Add obst 1170' MSL (280' AGL) UC, 38°15'12"N, 84°37'40"W.

Add obst 1199' MSL (299' AGL) UC, 38°16'32"N, 84°57'02"W.

Add obst 1119' MSL (265' AGL) UC, 38°26'43"N, 85°10'39"W.

Add obst 829' MSL (255' AGL) UC, 37°16'08"N, 86°40'28"W.

Add obst 902' MSL (255' AGL) UC, 36°45'38"N, 86°43'03"W.

Add obst 682' MSL (300' AGL) UC, 36°55'13"N, 87°58'37"W.

Add obst 1032' MSL (255' AGL) UC, 36°50'24"N, 85°56'34"W.

Add obst 905' MSL (310' AGL) UC, 37°51'44"N, 86°45'00"W.

Add obst 1477' MSL (255' AGL) UC, 36°55'42"N, 84°14'33"W.

Add obst 1052' MSL (255' AGL) UC, 37°05'29"N, 85°36'52"W.

Add obst 977' MSL (260' AGL) UC, 39°09'51"N, 90°48'57"W.

Add obst 834' MSL (234' AGL) UC, 38°17'02"N, 90°35'42"W.

Add obst 955' MSL (232' AGL) UC, 38°19'22"N, 90°50'28"W.

Add obst 787' MSL (400' AGL) UC, 36°15'29"N, 88°11'11"W.

Add obst 1178' MSL (286' AGL) UC, 36°30'51"N, 86°33'57"W.

Add obst 988' MSL (290' AGL) UC, 36°27'48"N, 87°37'08"W.

Add obst 2210' MSL (260' AGL) UC, 36°23'13"N, 84°20'11"W.

Add obst 1792' MSL (306' AGL) UC, 37°36'25"N, 83°59'58"W.

Add obst 1020' MSL (349' AGL) UC, 37°06'51"N, 87°56'32"W.

Add obst 887' MSL (259' AGL) UC, 39°35'02"N, 89°44'44"W.

Add obst 1008' MSL (216' AGL) UC, 39°20'01"N, 84°46'34"W.

Add obst 959' MSL (260' AGL) UC, 38°24'38"N, 90°45'42"W.

Add obst 962' MSL (215' AGL) UC, 37°41'57"N, 84°29'03"W.

3 Jun 2010 Add obst 648' MSL (260' AGL), 36°56'39"N, 90°10'08"W.

Add obst 655' MSL (258' AGL), 37°51'48"N, 89°19'11"W.

AIRPORTS**17 Dec 2009** No Major Changes.**11 Feb 2010** Delete ACTION arpt, 39°07'57"N, 84°49'43"W.

Delete RP 19, RP 14 at SMYRNA arpt, 36°00'32"N, 86°31'12"W.

8 Apr 2010 Delete RICHARDSON arpt, 38°22'50"N, 87°13'14"W.**3 Jun 2010** Change CTAF 122.8 to 123.05 at ALEXANDRIA arpt 40°13'57"N, 85°38'15"W.

Change CTAF 122.8 to 122.9 at CYNTHIANA-HARRISON CO arpt 38°21'58"N, 84°17'00"W.

CONTINUED ON NEXT PAGE

NAVAIDS**17 Dec 2009** No Major Changes.**11 Feb 2010** Delete CLAYE NDB, 39°03'23"N, 86°35'58"W.

Shutdown KENNETT NDB, 36°13'43"N, 90°02'21"W.

Shutdown LITCHFIELD NDB, 39°09'55"N, 89°40'32"W.

8 Apr 2010 No Major Changes.**3 Jun 2010** No Major Changes.**AIRSPACE****17 Dec 2009 – 11 Feb 2010** No Major Changes.**8 Apr 2010** Revise ST. LOUIS, MO. Class D: That airspace extending upward from the surface to and including 3,000 feet MSL within a 4.3-mile radius of Spirit of St. Louis Airport, and within 1 mile each side of the 258° bearing from the airport extending from the 4.3-mile radius to 4.6 miles west of the airport, excluding that airspace within the St. Louis, MO Class B airspace area. This Class D airspace area is effective during the specific dates and times established in advance by a Notice to Airmen. The effective dates and times will thereafter be continuously published in the Airport/Facility Directory.**3 Jun 2010** Revise HUNTINGBURG, IN Class E: That airspace extending upward from 700 feet above the surface within a 7-mile radius of Huntingburg Airport and within 2 miles either side of the 091° bearing from the airport extending from the 7-mile radius to 11.1 miles east of the airport.**SPECIAL USE AIRSPACE****17 Dec 2009 – 3 Jun 2010** No Major Changes.**MILITARY TRAINING ROUTES****17 Dec 2009 – 3 Jun 2010** No Major Changes.**MISCELLANEOUS****17 Dec 2009 – 3 Jun 2010** No Major Changes.

ST. LOUIS TERMINAL AREA CHART**73rd Edition, 17 Dec 2009****OBSTRUCTIONS****17 Dec 2009** No Major Changes.**11 Feb 2010** Change obst from 827' MSL (243' AGL) to 882' MSL (300' AGL), 38°44'06"N, 89°57'02"W.

Add obst 738' MSL (226' AGL) UC, 38°11'11"N, 89°40'09"W.

Add obst 722' MSL (260' AGL) UC, 38°17'56"N, 89°59'34"W.

Add obst 885' MSL (258' AGL) UC, 39°02'32"N, 89°53'08"W.

Add obst 887' MSL (258' AGL) UC, 39°04'50"N, 89°48'26"W.

8 Apr 2010 Add obst 977' MSL (260' AGL) UC, 39°09'51"N, 90°48'57"W.

Add obst 834' MSL (234' AGL) UC, 38°17'02"N, 90°35'42"W.

Add obst 955' MSL (232' AGL) UC, 38°19'22"N, 90°50'28"W.

Add obst 959' MSL (260' AGL) UC, 38°24'38"N, 90°45'42"W.

3 Jun 2010 Add obst 856' MSL (260' AGL), 39°06'47"N, 91°04'22"W.**AIRPORTS****17 Dec 2009 – 3 Jun 2010** No Major Changes.**NAVAIDS****17 Dec 2009 – 3 Jun 2010** No Major Changes.**AIRSPACE****17 Dec 2009 – 11 Feb 2010** No Major Changes.**8 Apr 2010** Revise ST. LOUIS, MO. Class D: That airspace extending upward from the surface to and including 3,000 feet MSL within a 4.3-mile radius of Spirit of St. Louis Airport, and within 1 mile each side of the 258° bearing from the airport extending from the 4.3-mile radius to 4.6 miles west of the airport, excluding that airspace within the St. Louis, MO Class B airspace area. This Class D airspace area is effective during the specific dates and times established in advance by a Notice to Airmen. The effective dates and times will thereafter be continuously published in the Airport/Facility Directory.**3 Jun 2010** No Major Changes.**SPECIAL USE AIRSPACE****17 Dec 2009 – 3 Jun 2010** No Major Changes.**MILITARY TRAINING ROUTES****17 Dec 2009 – 3 Jun 2010** No Major Changes.**MISCELLANEOUS****17 Dec 2009 – 3 Jun 2010** No Major Changes.

TWIN CITIES SECTIONAL

79th Edition, 14 Jan 2010

OBSTRUCTIONS

11 Feb 2010 Add obst 1519' MSL (349' AGL) UC, 45°43'12"N, 94°23'04"W.

8 Apr 2010 Add obst 2523' MSL (398' AGL) UC, 47°07'12"N, 100°32'48"W.

Add obst 1949' MSL (499' AGL) UC, 45°27'13"N, 98°48'12"W.

Add obst 1688' MSL (299' AGL) UC, 45°45'56"N, 98°29'27"W.

Add obst 2135' MSL (306' AGL) UC, 44°58'09"N, 99°10'36"W.

Add obst 1465' MSL (225' AGL) UC, 46°40'26"N, 94°06'28"W.

Add obst 1441' MSL (350' AGL) UC, 48°50'42"N, 95°50'20"W.

Add obst 1647' MSL (300' AGL) UC, 47°01'13"N, 93°34'45"W.

Add obst 1600' MSL (228' AGL) UC, 47°10'36"N, 93°31'49"W.

3 Jun 2010 Add obst 1815' MSL (350' AGL) UC, 46°48'34"N, 94°38'24"W.

Add obst 2158' MSL (256' AGL) UC, 46°39'47"N, 99°24'32"W.

Add obst 1130' MSL (315' AGL) UC, 48°17'57"N, 97°14'00"W.

Add obst 1947' MSL (320' AGL) UC, 48°39'35"N, 99°48'43"W.

Add obst 1896' MSL (398' AGL) UC, 47°19'26"N, 97°57'17"W.

Add obst 2477' MSL (498' AGL) UC, 45°01'10"N, 96°56'44"W.

Add obst 2299' MSL (262' AGL) UC, 44°28'26"N, 99°09'01"W.

Add obst 1767' MSL (306' AGL) UC, 46°43'02"N, 98°03'42"W.

Add obst 1729' MSL (306' AGL) UC, 47°13'33"N, 98°11'37"W.

Add obst 1349' MSL (257' AGL) UC, 47°31'42"N, 97°34'51"W.

Add obst 2328' MSL (349' AGL) UC, 47°11'04"N, 100°50'48"W.

Add obst 2288' MSL (420' AGL) UC, 47°34'30"N, 92°35'25"W.

AIRPORTS

11 Feb 2010 Delete RP 4, 22 at MAPLE LAKE arpt, 45°14'10"N, 93°59'08"W.

8 Apr 2010 Change FLYING CLOUD ATCT freq from 118.1 to 119.15, 44°49'38"N, 93°27'30"W.

Add RP 9R to GRAND FORKS INTL arpt, 47°56'50"N, 97°10'25"W.

3 Jun 2010 Change CTAF 118.1 to 119.15 at FLYING CLOUD arpt, 44°49'39"N, 93°27'31"W.

Delete BUFFALO LAKE spb, 45°09'44"N, 93°54'38"W.

NAVAIDS

11 Feb 2010 Change FLYING CLOUD VOR/DME position from 44°49'33"N, 93°27'24"W to 44°49'31"N, 93°26'34"W. Raise all outbound bearings from FLYING CLOUD VOR/DME by 6 degrees, 44°49'31"N, 93°26'34"W.

8 Apr 2010 Change FLYING CLOUD VOR/DME freq from 111.8 TO 117.7, 44°49'32"N, 93°27'24"W.

3 Jun 2010 Add LAKE BEMIDJI VOR-DME, freq 110, Chan 37, ident (IDJ), class TVORW-DME, 47°30'28"N, 94°55'24"W.

AIRSPACE

11 Feb 2010 – 8 Apr 2010 No Major Changes.

3 Jun 2010 Add LANGDON, ND Class E. That airspace extending upward from 700 feet above the surface within a 6.3-mile radius of Robertson Field Airport.

Add KINDRED, ND Class E. That airspace extending upward from 700 feet above the surface within a 6.3-mile radius of Hamry Field Airport.

SPECIAL USE AIRSPACE

11 Feb 2010 – 3 Jun 2010 No Major Changes.

MILITARY TRAINING ROUTES

11 Feb 2010 – 3 Jun 2010 No Major Changes.

MISCELLANEOUS

11 Feb 2010 – 3 Jun 2010 No Major Changes.

WICHITA SECTIONAL
84th Edition, 14 Jan 2010**OBSTRUCTIONS**

11 Feb 2010 Add obst 1665' MSL (349' AGL) UC, 36°21'39"N, 98°33'03"W.

Add obst 4492' MSL (350' AGL) UC, 38°07'04"N, 103°31'00"W.

Add obst 5430' MSL (350' AGL) UC, 39°50'33"N, 103°53'05"W.

8 Apr 2010 Add obst 1729' MSL (349' AGL) UC, 36°24'58"N, 98°44'43"W.

Add obst 2487' MSL (730' AGL) UC, 37°24'09"N, 98°34'52"W.

Add obst 3688' MSL (270' AGL) UC, 38°31'06"N, 101°29'49"W.

Add obst 1755' MSL (349' AGL) UC, 36°32'58"N, 98°15'31"W.

Add obst 2753' MSL (295' AGL) UC, 36°08'18"N, 99°32'31"W.

3 Jun 2010 Add obst 4417' MSL (270' AGL) UC, 39°01'16"N, 102°09'24"W.

Add obst 2471' MSL (260' AGL) UC, 39°37'34"N, 99°51'06"W.

Add obst 2640' MSL (260' AGL) UC, 38°51'19"N, 99°54'41"W.

Add obst 2096' MSL (315' AGL) UC, 36°47'58"N, 99°21'52"W.

Add obst 6044' MSL (1190' AGL) UC, 40°02'01"N, 103°56'19"W.

AIRPORTS

11 Feb 2010 Add RP 8 and RP 26 to MC PHERSON arpt, 38°21'08"N, 97°41'28"W.

8 Apr 2010 Change RP 8 to RP 18 at MC PHERSON arpt, 38°21'08"N, 97°41'28"W.

3 Jun 2010 No Major Changes.

NAVAIDS

11 Feb 2010 – 8 Apr 2010 No Major Changes.

3 Jun 2010 Change GAGE VOR to MITBEE VOR, 36°20'37"N, 99°52'48"W.

Change GAGE VOR IDENT from GAG to MMB, 36°20'37"N, 99°52'48"W.

AIRSPACE

11 Feb 2010 – 3 Jun 2010 No Major Changes.

SPECIAL USE AIRSPACE

11 Feb 2010 – 3 Jun 2010 No Major Changes.

MILITARY TRAINING ROUTES

11 Feb 2010 No Major Changes.

8 Apr 2010 IR-504 Revised

3 Jun 2010 IR409 Revised

MISCELLANEOUS

11 Feb 2010 No Major Changes.

8 Apr 2010 Change MEF 2⁵ to 2⁶ in quadrant 37°00'-37°30'N, 98°30'-99°00'W.

3 Jun 2010 Change MEF 5⁴ to 6² in quadrant 40°00'-40°30'N, 103°30'-104°00'W.

**INTENTIONALLY
LEFT
BLANK**

SUPPLEMENTAL COMMUNICATION REFERENCE

Contained within this tabulation, and listed alphabetically by airport name, are all private-use airports charted on the U.S. IFR Enroute Low and High Altitude charts in the United States, having terminal approach and departure control facilities. Additionally, listed by country, are all Canadian and Mexican airports that appear on the U.S. IFR Enroute charts with approach and departure control services. All frequencies transmit and receive unless otherwise noted. Radials defining sectors are outbound from the facility.

UNITED STATES

FACILITY NAME	CHART & PANEL
Frankfort, IL (LL40)	L-28H
Chicago App/Dep Con 133.1 285.6	
Glasgow Industrial, MT (Ø7MT)	H-1E, 2F, L-13D
Salt Lake Center App/Dep Con 126.85 305.2	
USAF Academy Bullseye Aux Airstrip, CO (C09Ø)	L-10F
ASOS 118.325	
West Kentucky Airpark, KY (5KY3)	L-16I
Memphis Center App/Dep Con 133.65 292.15	
William P Gwinn, FL (Ø6FA)	H-8I, L-23C
Gwinn Tower 120.4 279.25 (Mon-Fri 1300-2100Z)	
Gnd Con 121.65 279.25	

CANADA

FACILITY NAME	CHART & PANEL
Abbotsford, BC (CYXX)	H-1B, L-12F
ATIS 119.8 (1500-0700Z)	
Victoria Trml App/Dep Con 132.7 (Avbl on ground) 290.8	
Tower 119.4 (Inner) 121.0 (Outer) 295.0 (1500-0700Z) Gnd Con 121.8	
MF 119.4 295.0 (0700-1500Z) (Shape irregular to 4500')	
Amos/Magny, QC (CYEY)	H-11B
Montreal Center App/Dep Con 125.9	
Atikokan Muni, ON (CYIB)	L-14I
MF 122.3 (5 NM to 4500' No ground station)	
Barrie-Orillia (Lake Simcoe Rgnl), ON (CYLS)	H-11B, L-31D
AWOS 122.55 (Pvt)	
Toronto Center App/Dep Con 124.025	
Bar River, ON (CPF2)	L-31C
Toronto Center App/Dep Con 132.65	
Bathurst, NB (CZBF)	L-32J
Moncton Center App/Dep Con 134.25	
Boundary Bay, BC (CZBB)	H-1B, L-1E
ATIS 125.5 (1500-0700Z)	
Vancouver App/Dep Con 132.3 363.8	
Tower 118.1 (Inner) 127.6 (Outer) (1500-0700Z) Gnd Con 124.3	
MF 118.1 (0700-1500Z to 2000'. Vancouver Trml 125.2 above 2000'. Shape irregular to 2500'.)	
Brampton, ON (CNC3)	L-31D
Toronto Trml App/Dep Con 119.3 253.1	
Brandon Muni, MB (CYBR)	H-2H
Winnipeg Center App/Dep Con 132.25 285.4	
MF 122.1 (5 NM to 4000')	
Brantford, ON (CYFD)	L-31D
Toronto Trml App/Dep Con 128.27	
Brockville-Thousand Islands Rgnl Tackaberry, ON (CNL3)	L-32G
Montreal Center App/Dep Con 134.675	
Bromont, QC (CZBM)	L-32G
Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM to 3400')	
Burlington Airpark, ON (CZBA)	L-31D
Toronto Center App/Dep Con 119.3 253.1	
Castlegar/West Kootenay Rgnl, BC (CYCG)	H-1C
Vancouver Center App/Dep Con 134.2 227.3	
MF 122.1 (5 NM to 6500')	
Centralia/James T. Fld Muni, ON (CYCE)	H-10G, 11B, L-31D
Toronto Center App/Dep Con 135.30	
Charlottetown, PE (CYYG)	H-11E, L-32J
Moncton Center App/Dep Con 135.65 384.8 MF 118.0 (5 NM to 3200')	
Chatham-Kent, ON (CNZ3)	H-10G, L-30G
Cleveland Center App/Dep Con 132.25	

FACILITY NAME	CHART & PANEL
Collingwood, ON (CNY3) Toronto Center App/Dep Con 124.02	H-11B, L-31D
Cornwall Rgnl, ON (CYCC) Boston Center App/Dep Con 135.25 377.1	L-32G
Cranbrook/Canadian Rockies Intl, BC (CYXC) Vancouver Center App/Dep Con 133.6 MF 122.3 (5 NM to 6100')	H-1C
Debert, NS (CCQ3) Halifax Trml App/Dep Con 119.2	H-11E, L-32J
Digby, NS (CYID) Moncton Center App/Dep Con 123.9	L-32J
Downsview, ON (CYZD) Toronto Center App/Dep Con 133.4 MF 126.2 (1300-2300Z†, 3 NM to 1700')	H-11B, L-31E
Drummondville, QC (CSC3) Montreal Center App/Dep Con 132.35	L-32H
Earlton (Timiskaming Rgnl), ON (CYXR) MF 122.0 (5 NM to 3800') AWOS 128.6	H-11B
Elliot Lake Muni, ON (CYEL) Toronto Center App/Dep Con 135.4	L-31C
Fort Frances Muni, ON (CYAG) Minneapolis Center App/Dep Con 120.9	L-14H
Fredericton Intl, NB (CYFC) ATIS 127.55 (1045-0245Z†, OT AWOS) Moncton Center App/Dep Con 124.3 135.5 270.8 Tower 119.0 (1045-0245Z†) Gnd Con 121.7 (1045-0245Z†) MF 119.0 (0245-1045Z†, 5 NM to 3500')	H-11E, L-32I
Goderich, ON (CYGD) Toronto Center App/Dep 135.3 266.3	H-11B, L-31D
Greenwood, NS (CYZX) ATIS 128.85 244.3 (1100-0000Z†) App/Dep Con 120.6 335.9 Tower 119.5 126.2 236.6 324.3 Gnd Con 133.75 289.4 Clncl Del 128.025 283.9	H-11E, L-32J
Grimsby Air Park, ON (CNZ8) Toronto Trml App/Dep Con 128.27 268.75 Tower 125.0 308.475	L-31E
Halifax/Shearwater, NS (CYAW) ATIS 129.175 (Ltd hrs) App/Dep Con 119.2 Tower 119.0 126.2 340.2 360.2 (Ltd hrs) Gnd Con 121.7 250.1	H-11E, L-32J
Halifax/Stanfield Intl, NS (CYHZ) ATIS 121.0 Moncton Center App/Dep Con 118.7 119.2 128.55 135.3 363.8 Tower 118.4 236.6 Gnd Con 121.9 275.8 Clncl Del 123.95 Apron Advisory 122.125	H-11E, L-32J
Hamilton, ON (CYHM) ATIS 128.1 Toronto Trml App/Dep Con 128.27 268.75 Tower 119.7 125.0 Gnd Con 121.6	H-10H, 11B, L-11B
Kingston, ON (CYGK) Montreal Center App/Dep Con 135.05 398.4 (0400-1115Z†) MF 122.5 (1115-0400Z† 5 NM to 3300')	H-11C, L-31E, 32F
Kitchener/Waterloo, ON (CYKF) ATIS 125.1 (1200-0400Z†) Toronto Trml App/Dep Con 128.275 Waterloo Tower 126.0 118.55 (1200-0400Z†) Gnd Con 121.8 MF 126.0 (0400-1200Z† 5 NM to 4000')	H-11B, L-31D
Lachute, QC (CSE4) Montreal Center App Con 124.65 132.85 268.3 Montreal Center Dep Con 132.85 268.3	L-32G
La Tuque, QC (CYLQ) Montreal Center App/Dep Con 134.5	H-11C
Langley, BC (CYNJ) ATIS 124.5 (1630-0230Z, DT 1530-0330Z) Victoria Trml 132.7 290.8 Tower 119.0 (1630-0230Z, DT 1530-0330Z) Gnd Con 121.9 MF 119.0 (0230-1630Z, DT 0330-1530Z 3 NM to 1900')	L-1E

FACILITY NAME	CHART & PANEL
Leamington, ON (CLM2) Cleveland Center App/Dep Con 132.45	L-30F
Lethbridge, AB (CYQL) ATIS 124.4 (1300-0545Z‡) Edmonton Center App/Dep Con 132.75 265.2 MF 121.0 (5 NM to 6000')	H-1D
Lindsay, ON (CNF4) Toronto Center App/Dep 134.25	L-31E, L-32F
Liverpool/South Shore Rgnl, NS (CYAU) Moncton Center App/Dep Con 123.9	L-32J
London, ON (CYXU) ATIS 127.8 (1120-0345Z‡) Toronto Center App/Dep 135.3 135.625 Tower 119.4 125.65 (1120-0345Z‡) Gnd Con 121.9 MF 119.4 (0345-1120Z‡ 5 NM to 3000')	H-10G, 11B, L-30G, 31D
Manitowaning/Manitoulin East Muni, ON (CYEM) Toronto Center App/Dep 135.4 260.9	L-31C
Maniwaki, QC (CYMW) Montreal Center App/Dep Con 126.57	L-32G
Mascouche, QC (CSK3) MF 122.35 (5 NM to 2500'. No gnd station. Excluding the portion S of the N shore of Riviere des Milles-Iles and 1 NM around Lac Agile Mascouche arpt.)	L-32G
Medicine Hat, AB (CYXH) AWOS 124.875 (0345-1245Z‡) MF 122.2 (1245-0345Z‡ 5 NM to 5400')	H-1D
Midland/Huron, ON (CYEE) Toronto Center App/Dep 124.025	L-31D
Miramichi, NB (CYCH) Moncton Center App/Dep Con 123.7	H-11E, L-32J
Moncton/Greater Moncton Intl, NB (CYQM) ATIS 128.65 App/Dep 124.4 Tower 120.8 236.6 Gnd Con 121.8 275.8 Apron Advisory 122.075	H-11E, L-32J
Mont-Laurier, QC (CSD4) Montreal Center App/Dep Con 126.57	L-32G
Montreal Intl (Mirabel), QC (CYMX) ATIS 125.7 Montreal Center App Con 124.65 132.85 268.3 Montreal Dep Con 132.85 268.3 MF 119.1 (7 NM shape irregular to 2000') VFR Advisory 134.15	H-11C, 12K, L-32G
Montreal/Pierre Elliott Trudeau Intl, QC (CYUL) ATIS 133.7 Montreal Trml App Con 118.9 124.65 126.9 132.85 268.3 Tower 119.9 267.1 Gnd Con 121.9 275.8 Clnc Del 125.6 Apron 122.075 Montreal Trml Dep Con 118.9 (SE-S-SW) 124.65 268.3 (W-NW-NE) VFR Advisory 134.15	H-11C, 12K, L-32G
Montreal/St-Hubert, QC (CYHU) ATIS 124.9 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z) AWOS 124.9 Montreal Center App/Dep Con 125.15 268.3 St. Hubert Tower 118.4 (Apr-Oct 1045-0500Z‡, Nov-Mar 1045-0400Z) Gnd Con 126.4 MF 118.4 (Apr-Oct 0500-1045Z‡, Nov-Mar 0400-1045Z 5 NM shape irregular to 2500') VFR Advisory 134.15	H-11C, L-32G
Muskoka, ON (CYQA) AWOS 124.575 MF 122.3 (5 NM to 3900')	H-11B, L-31D
Nanaimo, BC (CYCD) Victoria Trml App/Dep 120.8 133.95 252.3 MF 122.1 1330-0530Z‡ (5 NM to 2500')	H-1B, L-1E
North Bay, ON (CYYB) ATIS 124.9 (1130-0330Z‡) Toronto Center App/Dep 121.225 127.25 MF 118.3 (1130-0330Z‡ 7 NM to 5000')	H-11B, L31D
Oshawa, ON (CYYO) ATIS 125.675 (1130-0330Z‡) Toronto Trml App/Dep Con 133.4 Tower 120.1 (1130-0330Z‡) Gnd Con 118.4 MF 120.1 (0330-1130Z‡ 5 NM to 3000')	L-31E

FACILITY NAME	CHART & PANEL
Ottawa/Carp, ON (CYRP) ATIS 121.15 Ottawa Trml App/Dep Con 128.175 252.5	L-31E, 32F
Ottawa/Batineau, QC (CYND) Ottawa Trml App/Dep Con 127.7 128.175 MF 122.3 (5 NM shape irregular to 2500') VFR Advisory Ottawa Trml 127.7	H-11C, L-32G
Ottawa/MacDonald-Cartier Intl, ON (CYOW) ATIS 121.15 Ottawa App Con 135.15 Tower 118.8 (VFR South) 120.1 (VFR North) 118.8 341.3 Gnd Con 121.9 Cinc Del 119.4 Ottawa Dep Con 128.175	L-11C
Owen Sound/Billy Bishop Rgnl, ON (CYOS) Toronto Center App/Dep 132.575 290.6	L-31D
Pelee Island, ON (CYPT) Cleveland Center App/Dep Con 126.35 360.0	L-30F
Pembroke, ON (CYTA) Montreal Center App/Dep Con 135.2 Petawawa Advisory 126.4 250.1 (Mon-Fri 1300-2130Z†, OT PPR)	H-11C, L-31E, 32F
Penticton, BC (CYPF) Vancouver Center App/Dep Con 133.5 351.3 MF 118.5 (5 NM to 4100')	H-1B
Peterborough, ON (CYPQ) AWOS 126.925 Toronto Center App/Dep 134.25	H-11B, L-31E, 32F
Pincher Creek, AB (CZPC) Edmonton Center App/Dep Con 132.75 265.2	H-1D
Pitt Meadows, BC (CYPK) ATIS 125.0 (1500-0700Z†) Vancouver Center App Con 128.6 352.7 (Outer) Pitt Tower 126.3 (1500-0700Z†) Gnd Con 123.8 Vancouver Center Dep Con 132.3 363.8 (South) MF 126.3 (0700-1500Z†) (3NM to 2500')	L-1E
Quebec/Jean Lesage Intl, QC (CYQB) ATIS 134.6 Montreal Center App/Dep Con 124.0 127.85 135.025 270.9 322.8 Tower 118.65 236.6 Gnd Con 121.9 250.0	H-11D, L-32H
Riviere Du Loup, QC (CYRI) AWOS 122.025 (Pvt) Montreal Center App/Dep Con 125.1 299.6	H-11D
Rouyn Noranda, QC (CYUY) Montreal Center App/Dep Con 125.9 MF 122.2 (5 NM to 4000')	H-11B
Saint John, NB (CYSJ) Moncton Center App/Dep Con 124.3 135.5 270.8 MF 118.5 (5 NM to 3400')	H-11E, L-32J
Sarnia (Chris Hadfield), ON (CYZR) AWOS 119.125 Toronto Center 134.375	H-10G, 11B, L-30F
Sault Ste Marie, ON (CYAM) ATIS 133.05 (1300-0100Z†) Toronto Center App/Dep Con 132.65 344.5 Tower 118.8 (1300-0100Z†) Gnd Con 121.7 MF 118.8 (0100-1300Z† 5 NM irregular shape to 3000')	H-2K, L-31B
Sherbrooke, QC (CYAM) AWOS 126.25 Montreal Center App/Dep Con 132.55 MF 123.5 (Ltd hrs 5 NM to 3800')	H-11D, L-32H
South Renfrew Muni, ON (CNP3) Montreal Center App/Dep 124.275	L-31E, 32F
Southport, MB (CYPG) ATIS 120.85 (Mon-Fri 1400-2300Z† except holidays) Tower 126.2 384.2 (Mon-Fri 1400-2300Z† except holidays) Gnd Con 121.7 275.8	H-2H

FACILITY NAME	CHART & PANEL
Springwater Barrie Airpark, ON (CNA3) Toronto Center App/Dep Con 124.025	L-31D
St. Catharines/Niagara District, ON (CYSN) ATIS 128.525 (1215-0200Z) Toronto Trml App/Dep Con 133.4 253.1 MF 123.25 (1215-0200Z± 5 NM to 3300')	H-10H, 11B, L-31E
St. Frederic, QC (CSZ4) Montreal Center App/Dep Con 135.025 270.9	L-32H
St. Georges, QC (CYSG) Montreal Center App/Dep Con 132.35 MF 122.15 (5 NM 3900' ASL)	H-32H, L-11D
St. Jean, QC (CYJN) Montreal Center App/Dep Con 125.15 268.3 Tower 118.2 (Apr-Oct 1230-0230Z± Nov-Mar 1300-0200Z) Gnd Con 121.7	L-32G
Sudbury, ON (CYSB) ATIS 127.4 Toronto Center App/Dep Con 135.5 MF 125.5 (7 NM to 4000')	H-31B, 10G, L-31D
Summerside, PE (CYSU) AWOS 122.55 (Pvt) Moncton Center App/Dep Con 124.4 384.8	H-11E, L-32J
Thunder Bay, ON (CYQT) ATIS 128.8 (1100-0400Z) Winnipeg Center App/Dep Con 132.125 (0400-1100Z) Tower 118.1 (1100-0400Z) Gnd Con 121.9 App/Dep 119.2 MF 118.1 (0400-1100Z± 5 NM to 4000')	H-2J, L-14J
Timmins/Victor M. Power, ON (CYTS) ATIS 124.95 (1000-0500Z) Toronto Center App/Dep Con 128.3 MF 122.3 (5 NM to 4000')	H-11B
Toronto/Butterville Muni, ON (CYKZ) ATIS 127.1 (1200-0400Z) Toronto Trml App/Dep Con 133.4 Tower 124.8 119.9 (1200-0400Z) Gnd Con 121.8 MF 124.8 (0400-1200Z± No gnd station. 5 NM shape irregular to below 2500')	L-31E
Toronto/Billy Bishop Toronto City Airport, ON (CYTZ) ATIS 133.6 (1130-0400Z) App/Dep Con 133.4 Tower 118.2 119.2 (1130-0400Z) Gnd Con 121.7	L-31E
Toronto/Lester B Pearson Intl, ON (CYYZ) ATIS 120.825 App Con 124.475 125.4 132.8 Dep Con 127.575 128.8 Tower 118.35 118.7 Gnd Con 118.0 119.1 121.65 121.9 Cinc Del 121.3 (1200-0400Z)	H-11B, L-31D
Trenton, ON (CYTR) ATIS 135.45 257.7 App/Dep Con 128.4 324.3 Tower 128.7 236.6 Gnd Con 121.9 275.8 Cinc Del 124.35 286.4	H-11C, L-31E, 32F
Trenton/Mountain View, ON (CPZ3) Trenton Mil Advisory 268.0	H-11C, L-31E, 32F
Trois-Rivieres, QC (CYRQ) Montreal Center App/Dep Con 128.225 229.2 MF 123.0 (5 NM to 3200')	H-11C, L-32H
Val-d'Or, QC (CYVO) Montreal Center App/Dep Con 125.9 308.3 MF 118.5 (1030-0325Z± 5 NM to 4000')	H-11B
Vancouver Intl, BC (CYVR) ATIS 124.6 124.75 App Con 128.6 128.17 352.7 (Outer) 133.1 134.225 352.7 (Inner) Dep Con 126.125 (north) 132.3 (south) 363.8 Tower 118.7 (south) 119.55 (north) VFR 124.0 125.65 226.5 236.6 Gnd Con 121.7 (south) 127.15 (north) 275.8 Cinc Del 121.4	H-1B, L-1E

FACILITY NAME	CHART & PANEL
Victoria Intl, BC (CYYJ) ATIS 118.8 (1400-0800Z†) App Con 125.95 308.4 Dep Con 133.85 308.4 Tower 119.1 (Outer) 119.7 (Inner) 239.6 Gnd Con 121.9 361.4 (1400-0800Z† OT ctc Kamloops 119.7) Cinc Del 126.4 (1400-0800Z†)	H-1B, L-1E
Victoriaville, QC (CSR3) Montreal Center App Con 132.35	L-32H
Waterville/Kings Co Muni, NS (CCW3) Greenwood Trml App/Dep Con 120.6 335.9 Greenwood Tower 119.5 324.3	L-32J
Warton, ON (CYVY) Toronto Center App/Dep Con 132.575 MF 122.2 (5 NM to 3700')	H-11B, L-31D
Windsor, ON (CYQG) ATIS 134.5 (1130-0330Z†) Detroit App/Dep Con 126.85 127.5 134.3 348.3 363.2 Tower 124.7 (1130-0330Z†) Gnd Con 121.7 MF 124.7 (0330-1130Z† 6 NM irregular shape to below 3000') VFR Advisory Detroit App Con 134.3	H-10G, L-8J
Yarmouth, NS (CYQI) Moncton Center App/Dep Con 123.9 368.5 MF 123.0 (5 NM to 3100')	H-11E, L-32I

MEXICO

FACILITY NAME	CHART & PANEL
Abraham Gonzalez Intl (MMCS) Juarez App Con 119.9 Juarez Tower 118.9	H-4K, L-6F
Del Norte Intl (MMAN) ATIS 127.55 (1300-0300Z†) Monterrey App 119.75 120.4 Tower 118.6	H-7B, L-20G
Durango Intl (MMDQ) ATIS 132.1 Tower 118.1 Durango Info 122.3	H-7A
General Abelardo L Rodriguez Intl (MMTJ) ATIS 127.9 Tijuana App Con 119.5 120.3 Tijuana Tower 118.1 Cinc Del 122.35 Tijuana Info 132.1	H-4H, L-4H
General Lucio Blanco Intl (MMRX) Reynosa App Con 118.8 Reynosa Tower 118.8	H-7B, L-20H
General Mariano Escobedo Intl (MMMY) ATIS 127.7 Monterrey App Con 119.75 120.4 Monterrey Tower 118.1 Gnd Con 121.9	H-7B, L-20G
General R Fierro Villalobos Intl (MMCU) ATIS 127.9 Chihuahua App Con 121.0 Chihuahua Tower 118.4	L-6I
General Rodolfo Sanchez Taboada Intl (MMML) ATIS 127.6 Mexicali App Con 118.2 Mexicali Tower 118.2 Mexicali Info 123.9 122.3	H-4H, L-4J, 5A
General Servando Canales Intl (MMMA) Matamoros App Con 118.0 Matamoros Tower 118.0	H-7C, L-21A
Plan De Guadalupe Intl (MMIO) Saltillo App Con 127.4 Saltillo Tower 118.4	H-7B
Quetzalcoatl Intl (MMNL) Nuevo Laredo App Con 118.3 Nuevo Laredo Tower 118.3	H-7B, L-20G
Torreon Intl (MMTC) App Con 119.6 Tower 118.5	H-7A









In support of the Federal Aviation Administration's Runway Incursion Program, selected towered airport diagrams have been published in the Airport Diagram section of the A/FD. Diagrams will be listed alphabetically by associated city and airport name. Airport diagrams, depicting runway and taxiway configurations, will assist both VFR and IFR pilots in ground taxi operations. The airport diagrams in this publication are the same as those published in the U.S. Terminal Procedures Publications. For additional airport diagram legend information see the U.S. Terminal Procedures Publication.

NOTE: Some text data published under the individual airport in the front portion of the A/FD may be more current than the data published on the Airport Diagrams. The airport diagrams are updated only when significant changes occur.

GENERAL INFORMATION





PILOT CONTROLLED AIRPORT LIGHTING SYSTEMS

Available pilot controlled lighting (PCL) systems are indicated as follows:

1. Approach lighting systems that bear a system identification are symbolized using negative symbology, e.g., , , .
2. Approach lighting systems that do not bear a system identification are indicated with a negative "0" beside the name. A star (★) indicates non-standard PCL, consult the individual airport in the front portion of the A/FD, e.g., ★. To activate lights use frequency indicated in the communication section of the chart with a  or the appropriate lighting system identification e.g., UNICOM 122.8 , , .

<u>KEY MIKE</u>	<u>FUNCTION</u>
7 times within 5 seconds	Highest intensity available
5 times within 5 seconds	Medium or lower intensity (Lower REIL or REIL-off)
3 times within 5 seconds	Lowest intensity available (Lower REIL or REIL-off)

CHART CURRENCY INFORMATION

FAA procedure amendment number  Amdt 11A 99365  Date of latest change
 Orig 00365 

The Chart Date identifies the Julian date the chart was added to the volume or last revised for any reason. The first two digits indicate the year, the last three digits indicate the day of the year (001 to 365/6) in which the latest addition or change was first published.

The Procedure Amendment Number precedes the Chart Date, and changes any time instrument information (e.g., DH, MDA, approach routing, etc.) changes. Procedure changes also cause the Chart Date to change.

MISCELLANEOUS

- ★ Indicates a non-continuously operating facility, see the individual airport in the front portion of the A/FD.
- # Indicates control tower temporarily closed UFN.









10042

LEGEND




INSTRUMENT APPROACH PROCEDURES (CHARTS)

AIRPORT DIAGRAM/AIRPORT SKETCH

Runways








			
Hard Surface	Other Than Hard Surface	Stopways, Taxiways, Parking Areas, Water Runways	Displaced Threshold
			
Closed Runway	Closed Taxiway	Under Construction	Metal Surface

ARRESTING GEAR: Specific arresting gear systems; e.g., BAK12, MA-1A etc., shown on airport diagrams, not applicable to Civil Pilots. Military Pilots refer to appropriate DOD publications.

 uni-directional  bi-directional  Jet Barrier


ARRESTING SYSTEM 

REFERENCE FEATURES

Buildings.....	
Tanks.....	
Obstructions.....	
Airport Beacon #.....	
Runway	
Radar Reflectors.....	
Control Tower #.....	
Hot Spot	





When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and further identified as TWR.





Runway length depicted is the physical length of the runway (end-to-end, including displaced thresholds if any) but excluding areas designated as stopways.

A  symbol is shown to indicate runway declared distance information available, see appropriate A/FD, Alaska or Pacific Supplement for distance information.

Runway Weight Bearing Capacity/or PCN Pavement Classification Number is shown as a codified expression.

Refer to the appropriate Supplement/Directory for applicable codes e.g., RWY 14-32 S75, T185, ST175, TT325 PCN 80 F/D/X/U

Helicopter Alighting Areas    


Negative Symbols used to identify Copter Procedures landing point.....    

Runway Threshold elevation.....THRE 123
Runway TDZ elevation.....TDZE 123

Runway Slope.....0.3% DOWN
(shown when runway slope is greater than or equal to 0.3%)

NOTE:

Runway Slope measured to midpoint on runways 8000 feet or longer.

 U.S. Navy Optical Landing System (OLS) "OLS" location is shown because of its height of approximately 7 feet and proximity to edge of runway may create an obstruction for some types of aircraft.

Approach light symbols are shown in the Flight Information Handbook.


Airport diagram scales are variable.

True/magnetic North orientation may vary from diagram to diagram

Coordinate values are shown in 1 or 1/2 minute increments. They are further broken down into 6 second ticks, within each 1 minute increments.

NOTE:

All new and revised airport diagrams are shown referenced to the World Geodetic System (WGS) (noted on appropriate diagram), and may not be compatible with local coordinates published in FLIP. (Foreign Only)

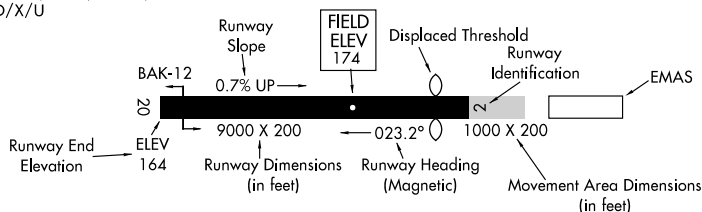

Airport diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations and provide information for updating Computer Based Navigation Systems (I.E., INS, GPS) aboard aircraft. Airport diagrams are not intended to be used for approach and landing or departure operations. For revisions to Airport Diagrams: Consult FAA Order 7910.4.

LEGEND

HOT SPOTS

An "Airport surface hot spot" is a location on an aerodrome movement area with a history or potential risk of collision or runway incursion, and where heightened attention by pilots/drivers is necessary.

A "hot spot" is a runway safety related problem area on an airport that presents increased risk during surface operations. Typically it is a complex or confusing taxiway/taxiway or taxiway/runway intersection. The area of increased risk has either a history of or potential for runway incursions or surface incidents, due to a variety of causes, such as but not limited to: airport layout, traffic flow, airport marking, signage and lighting, situational awareness, and training. Hot spots are depicted on airport diagrams as open circles or polygons designated as "HOT¹", "HOT²", etc. and tabulated in the list below with a brief description of each hot spot. Hot spots will remain charted on airport diagrams until such time the increased risk has been reduced or eliminated.

CITY/AIRPORT	HOT SPOT	DESCRIPTION
IOWA		
CEDAR RAPIDS THE EASTERN IOWA (CID)	HOT ¹ HOT ² HOT ³	Intersection of Rwy 13-31 and Rwy 08-26. Rwy 09 under construction, not available. Rwy 27 under construction, not available. Eastern 1000 feet of Rwy 27 used as taxi route. Taxi route crosses apch end of Rwy 26.
DES MOINES DES MOINES INTS (DSM)	HOT ¹ HOT ² HOT ³ HOT ⁴	Westbound tfc on Twy B must remain alert so as to not miss the right turn onto Twy D when taxiing to Rwy 13. Comply with rwy hold signs, sfc painted signs and elevated rwy guard lgs at the intersection of Twy B and Rwy 13-31. Use caution and comply with the signs and markings when taxiing near this complex intersection. The apch end of Rwy 5 at Twy P has limited visibility from the twr. Iowa ANG complex is located north of Twy D on the northwest part of the arpt. Vehicle movement in this area is obstructed from the tower's view. Be vigilant for vehicles while taxiing in the area.
DUBUQUE DUBUQUE RGNL (DBQ)	HOT ¹ HOT ² HOT ³	Use caution when taxiing to Rwy 18 or Rwy 13 via Twy A. Comply with rwy hold signs, sfc painted signs and elevated rwy guard lgs at the intersection of Twy A and Rwy 18-36. Use caution exiting the ramp area on Twy D. Twy D crosses Rwy 13-31 immediately after leaving ramp area. Use caution exiting the ramp area on Twy C. Twy C crosses Rwy 13-31 immediately after leaving ramp area.
FORT DODGE FORT DODGE RGNL (FOD)	HOT ¹	Westbound tfc on Twy B must remain alert at the intersection where Twy B splits with Twy D. Holding position markings for Rwy 06-24 and Rwy 12-30 are immediately after the twy split.
MASON CITY MASON CITY MUNI (MCW)	HOT ¹	Single twy leads to the apch end of Rwy 30 and Rwy 35. When departing northbound, cross check compass on rwy to verify use of correct rwy for departure. Approximately half of Rwy 12 and Rwy 18 are not mutually visible due to rising terrain and trees located between rwys. Use caution when operating on either Rwy 12 or Rwy 18 for crossing traffic. Broadcast your position and intentions on CTAF.
SIOUX CITY SIOUX GATEWAY/ COLONEL BUD DAY FIELD (SUX)	HOT ¹ HOT ²	Rwy 17-35 and Rwy 13-31 intersect at Twy B. When departing northbound, cross check compass on rwy to verify use of correct rwy for departure. Twy A and Twy G are located in the movement area near the approach end of Rwy 31. Do not traverse from Twy A and Twy G visa versa without ATC authorization.

WATERLOO
WATERLOO RGNL (ALO)

- HOT¹ The intersection of Twy B and Twy C outbound holding position markings for Rwy 12–30 and Rwy 18–36 are immediately after the split of Twy B and Twy C.
- HOT² Twy A crosses the apch end of Rwy 36 prior to Rwy 06. When departing northbound, cross check compass on rwy to verify use of correct rwy for departure.
- HOT³ Use caution exiting the ramp area on Twy B. Twy B intersects Rwy 06–24 immediately after leaving ramp area.
- HOT⁴ Use caution when crossing Rwy 12–30 on Twy A inbound and outbound. Twy A is used as a pass through twy to the ANG hangar and Rwy 06–24.

KANSAS

DODGE CITY
DODGE CITY RGNL (DDC)

- HOT¹ Ramp is in close proximity to rwys.

GARDEN CITY
GARDEN CITY RGNL (GCK)

- HOT¹ Twy C intersects Rwy 12–30 1300 feet from approach end. Back taxi clearance required for full length departure on Rwy 12.
- HOT² Use caution exiting the ramp area on Twy C. Twy C crosses Rwy 17–35 immediately after leaving ramp area. Pilots must use caution when exiting the rwy on Twy C, as the non-movement area boundary is on the twy prior to the ramp.
- HOT³ While taxiing southbound on Twy A to Rwy 30, left turn on Twy B required to reach approach end of Rwy 30. If pilot is not extra vigilant, it is easy for an aircraft to miss the turn on Twy B and cross the active rwy.

HUTCHINSON
HUTCHINSON MUNI (HUT)

- HOT¹ Twy A and Twy C intersect with multiple rwys.
- HOT² Twy B hold markings for Rwy 04 and Rwy 35 are very close. Use caution to hold short at proper hold marking.

LIBERAL
LIBERAL MID-AMERICA
RGNL (LBL)

- HOT¹ After leaving main ramp on Twy A northbound, use caution for traffic landing Rwy 22. Rwy 22 Rwy Boundary marking is on Twy A prior to the left turn on Twy B. Twy B is an extension of the Rwy 22 overrun. Rwy 17 Runway Boundary is on Twy A past Twy B. Use caution for close proximity approach ends of Rwy 17 and Rwy 22.
- HOT² Use caution exiting the ramp area on Twy C. Twy C intersects Rwy 17–35 immediately after leaving ramp area. Pilots must use caution when exiting the ramp and the rwy on Twy C, as Twy C is identified with blue reflectors.

MANHATTAN
MANHATTAN RGNL (MHK)

- HOT¹ Use caution when taxiing to/from the terminal area via Twy D. Twy D is the primary entrance and exit from the main ramp and is in close proximity to Rwy 03–21.
- HOT² Use caution when taxiing northeast on Twy A to the east ramp. Do not mistake Rwy 13–31 for Twy E.

OLATHE
JOHNSON CO
EXECUTIVE (OJC)

- HOT¹ Twy C crosses the approach end of Rwy 18.
- HOT² Aircraft on the east side of the rwy taxiing to Rwy 36 utilizing Twy B, cross Rwy 18–36. Rwy holding position marking is not fully visible until after marking the westbound turn.

OLATHE
NEW CENTURY
AIRCENTER (IXD)

- HOT¹ Complex twy configuration at and near the apch end of Rwy 18. Intersection of Twy C and Twy B is in the Rwy Safety Area for Rwy 18–36.
- HOT² Twy A is in close proximity to U.S. Army Reserve ramp area.
- HOT³ Complex intersection of Twy A and Twy F, along with Rwy 04–22 and Rwy 18–36. Additionally, acft southwest of this area may not be visible from the ATCT.

SALINA SALINA MUNI (SLN)	HOT ¹	Twy E crossing Rwy 17–35 is active with student pilot midfield departures. Note the elevated rwy guard lights located on the east side of Rwy 17–35 at Twy E.
	HOT ²	Traffic landing Rwy 12 use caution when exiting onto Twy B. Hold line for Rwy 17–35 approaches quickly. Note the elevated rwy guard lights located on the west side of Rwy 17–35 on Twy B.
TOPEKA FORBES FIELD (FOE)	HOT ¹	Southbound traffic on Twy A must remain alert so as to not miss the right turn on Twy A when taxiing to Rwy 03. Twy D continues to an intersection with Rwy 03. Twy A turns to the southwest.
	HOT ²	Use caution Twy A becomes Twy E just past access to the approach end of Rwy 03. Twy A turns left, Twy E continues southwest bound to the KS ANG ramp.
	HOT ³	Twy E is not visible from the ATCT. Twy E also accesses KS ANG ramp and is not maintained by the Airport Authority.
TOPEKA PHILIP BILLARD MUNI (TOP)	HOT ¹	Twy A and Twy D intersect inside of the Runway Safety Area for Rwy 04–22. Twy A intersects Rwy 04–22 at two different locations.
WICHITA WICHITA MID-CONTINENT (ICT)	HOT ¹	Twy R exits Air Carrier Gates & Ramps. Aircraft may enter Twy R from different directions at different angles.
	HOT ²	Twy B crosses or intersects all rwys. Intersection with Rwy 14–32 can be confusing.
	HOT ³	Twy K and Twy C complex on west side of the Air Carrier Ramp leads to Twy K1 intersection with Rwy 14–32 which is a common intersection departure point.

MINNESOTA

DULUTH DULUTH INTL (DLH)	HOT ¹	Acraft/vehicular t/c on Twy E1, Twy E2 and Twy E should be alert. Signage indicates Rwy 27 apch. Twy E is in the safety area for Rwy 09–27.
	HOT ²	Apch end of Rwy 27 located at Twy A5.
	HOT ³	Complex intersection. Be alert when taxiing to Rwy 21 via Twy A and Twy C.
MINNEAPOLIS MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLIAN (MSP)	HOT ¹	Expansive pavement at the intersection of Twy A, Twy B, Twy C, Twy D, and Twy H in near proximity to Rwy 12R–30L and Rwy 04–22. Use caution for rwy crossings in this area.
	HOT ²	Complex twy/rwy geometry.
	HOT ³	Expansive pavement at the intersection of Twy C, Twy D, Twy P, and Twy Q in near proximity to Rwy 12R–30L and Rwy 04–22. Use caution for rwy crossings in this area.
	HOT ⁴	Complex geometry at Rwy 04 apch end. Rwy 04 depart check compass to verify correct rwy heading.

MISSOURI

BRANSON BRANSON (BBG)	HOT ¹	Westbound traffic on Twy C must remain alert so as to not mistake Rwy 14–32 for a parallel twy. First left turn out of ramp area is Rwy 14–32.
	HOT ²	Use caution for aircraft utilizing Twy E and Twy F as a turn around after landing on Rwy 14 or taxiing to hold while waiting to depart Rwy 32. Back taxi required on Rwy 14–32 for full length departure on Rwy 32 and frequently utilized by aircraft landing Rwy 14.

COLUMBIA COLUMBIA RGNL (COU)	HOT ¹	Use caution approaching the intersection of Twy A and Twy B due to the close proximity of rwy holding position markings for Rwy 02–20 and Rwy 13–31.
	HOT ²	Aircraft departing Rwy 20. Taxiing on Rwy 13–31 may be authorized to reach the apch end of Rwy 20. Use caution not to confuse rwy holding position marking for Rwy 13 with the marking for Rwy 20.
	HOT ³	Acft departing Rwy 20. Runway holding position line for Rwy 20 is on Rwy 13–31.
FORT LEONARD WOOD WAYNESVILLE-ST. ROBERT RGNL FORNEY FLD (TBN)	HOT ¹	Arriving and departing aircraft must use the intersection at the southeast end of Rwy 14–32 to access the rwy. There is no parallel twy. Arriving and departing traffic may be required to back-taxi.
JEFFERSON CITY JEFFERSON CITY MEMORIAL (JEF)	HOT ¹	Complex intersection of twys and rwys. Rwy 12–30 intersects with Twy B and Rwy 09–27. Aircraft eastbound on Twy B from Rwy 12–30, holding position markings are for Rwy 12–30.
	HOT ²	Aircraft taxiing on Twy B to Rwy 27, be prepared for the holding position markings just out of the turn.
JOPLIN JOPLIN RGNL (JLN)	HOT ¹	All acft exiting the General Aviation Ramp on Twy B be prepared to hold west of Rwy 18–36 for both Rwy 18–36 and Rwy 05–23.
	HOT ²	Twy C ramp exit is in close proximity to the rwy holding position line for Rwy 18–36. Twy C intersects with Rwy 18–36 immediately after leaving the ramp area.
KANSAS CITY CHARLES B. WHEELER DOWNTOWN (MKC)	HOT ¹	On Twy G, holding position markings for Rwy 03–21 are unusual due to the angle that Twy G intersects with Rwy 03–21.
	HOT ²	Twy D intersects with Rwy 03–21 and Rwy 01–19. Holding position markings for Rwy 03–21 and Rwy 01–19 are within the runway safety area for each other. Twy D is also utilized by aircraft and vehicles to transition from the east ramps to the west ramps. Aircraft/vehicles often mistake the second hold short markings when exiting Rwy 01–19 at Twy D as the hold short markings for Rwy 03–21.
	HOT ³	Twy F, Twy D, Twy L transition when aircraft are taxiing northbound. Aircraft have the tendency to miss the left turn onto Twy L to continue across Rwy 01–19. Utilize extreme caution at night and in low visibility conditions.
KANSAS CITY KANSAS CITY INTL (MCI)	HOT ¹	Busy vehicle svc road crosses Twy G east of Twy B. Non-movement area begins just west of svc road.
	HOT ²	Twy E and Twy F intersection with Rwy 09–27. Immediately after crossing Twy C, both Twy E and Twy F cross Rwy 09–27.
	HOT ³	Twy C and Twy D intersection with Rwy 01R–19L. Immediately after crossing Twy E, both Twy C and Twy D cross Rwy 01R–19L.
	HOT ⁴	The intersection of Twy B–2 and Ottawa Ave. (vehicle svc road). Twy B–2 is the only entrance to the general aviation ramp. This svc road is a high traffic vehicle route for airlines and cargo carriers.
KIRKSVILLE KIRKSVILLE RGNL (IRK)	HOT ¹	Turf Rwy 09–27 taxi route enters Rwy 18–36 approximately 1000 feet south of the approach end of Rwy 18 between Twy A and Twy B.

ST. JOSEPH, MO
ROSECRANS MEMORIAL (STJ)

- HOT¹ Use caution exiting the ramp area on Twy B. Twy B crosses Rwy 17–35 immediately after leaving ramp area.
- HOT² Apch ends of Rwy 35 and Rwy 31 are both accessed via Twy A. When departing northbound, cross check compass on runway to verify use of correct runway for departure.
- HOT³ Twy B intersects Rwy 13 approximately 2000 feet from apch end. Back taxi clearance required for full length departure on Rwy 13.

ST. LOUIS
LAMBERT-ST.
LOUIS INTL. (STL)

- HOT¹ Use caution when approaching the intersection of Twy D and Twy L be careful not to cross the hold marking for Rwy 12R–30L without ATC authorization.
- HOT² Aircraft approaching Rwy 29 on Twy T, do not turn left on Twy A. Taxi straight ahead to Rwy 29.
- HOT³ Aircraft northwest on Twy F from the FBO or cargo ramp to Rwy 12L use diligence to not miss the left turn onto Twy S. If the left turn at Twy S is missed, do not cross the hold marking for Rwy 06–24 without ATC authorization.

ST. LOUIS
SPIRIT OF ST. LOUIS (SUS)

- HOT¹ Northwest bound tfc on Twy B use caution entering complex intersection with Twy Z, Twy D, and Twy C. The close proximity of Twy C and Twy D, immediately after the turn onto Twy Z can be confusing.
- HOT² On Twy B west of the blue port-a-ports, twr can not maintain visual contact with vehicles and small acft.
- HOT³ On Twy B northwest of Twy A, twr can not maintain visual contact with vehicles and acft.

SPRINGFIELD
SPRINGFIELD-BRANSON
NATIONAL (SGF)

- HOT¹ Acft exiting the Old Terminal ramp to the west, use caution as Twy D and Twy N are in close proximity to the rwys and angles create unusual holding positions.
- HOT² Northeast bound tfc on Twy F must remain alert so as to not mistake Rwy 14–32 for a parallel twy. First left turn out of ramp area is Rwy 14–32.
- HOT³ Due to large acft parked on the Air Cargo Ramp, Twr may be unable to maintain visual ctc with small acft taxiing northbound on Twy U north of Twy B.

NEBRASKA

GRAND ISLAND
CENTRAL NEBRASKA RGNL (GRI)

- HOT¹ When taxiing to the apch end of Rwy 13, use caution as Twy B crosses the apch end of Rwy 17. Rwy 17 holding position markings are accompanied by rwy guard lights on both sides of the rwy.
- HOT² Twy C crossed Rwy 17 immediately after leaving ramp area. Intersection of Rwy 17–35 and Twy C has rwy guard lights on both sides of the rwy.

LINCOLN
LINCOLN (LNK)

- HOT¹ Rwy 18–36, Rwy 14–32 and Twy D, Twy E and Twy J all intersect with each other in a small area. Angles of intersection can make sighting tfc difficult.
- HOT² Rwy 32 apch holding position is located on Twy A, immediately past the Twy A run up area.

OMAHA
EPPLEY AIRFIELD (OMA)

- HOT¹ A complex intersection of Twy S, Twy F, and Twy B is located between Rwy 14R–32L and the intersection of Rwy 14L–32R and Rwy 18–36.
- HOT² Intersection of Twy F and Rwy 14R–32L is in close proximity to the ramp at Twy C.
- HOT³ Intersection of Twy A and Rwy 18–36 is in close proximity to the ramp at Twy C.

NORTH DAKOTA

GRAND FORKS
GRAND FORKS INTL (GFK)

HOT¹

Clearance necessary to cross Rwy 09L and Twy A intersection.

HOT²

Clearance necessary to cross Rwy 17R and Twy B intersection.

SOUTH DAKOTA

SIOUX FALLS
JOE FOSS FIELD (FSD)


HOT¹

Complex twy intersection in close proximity of rwys.

09183

AIRPORT DIAGRAM

AL-16 (FAA)

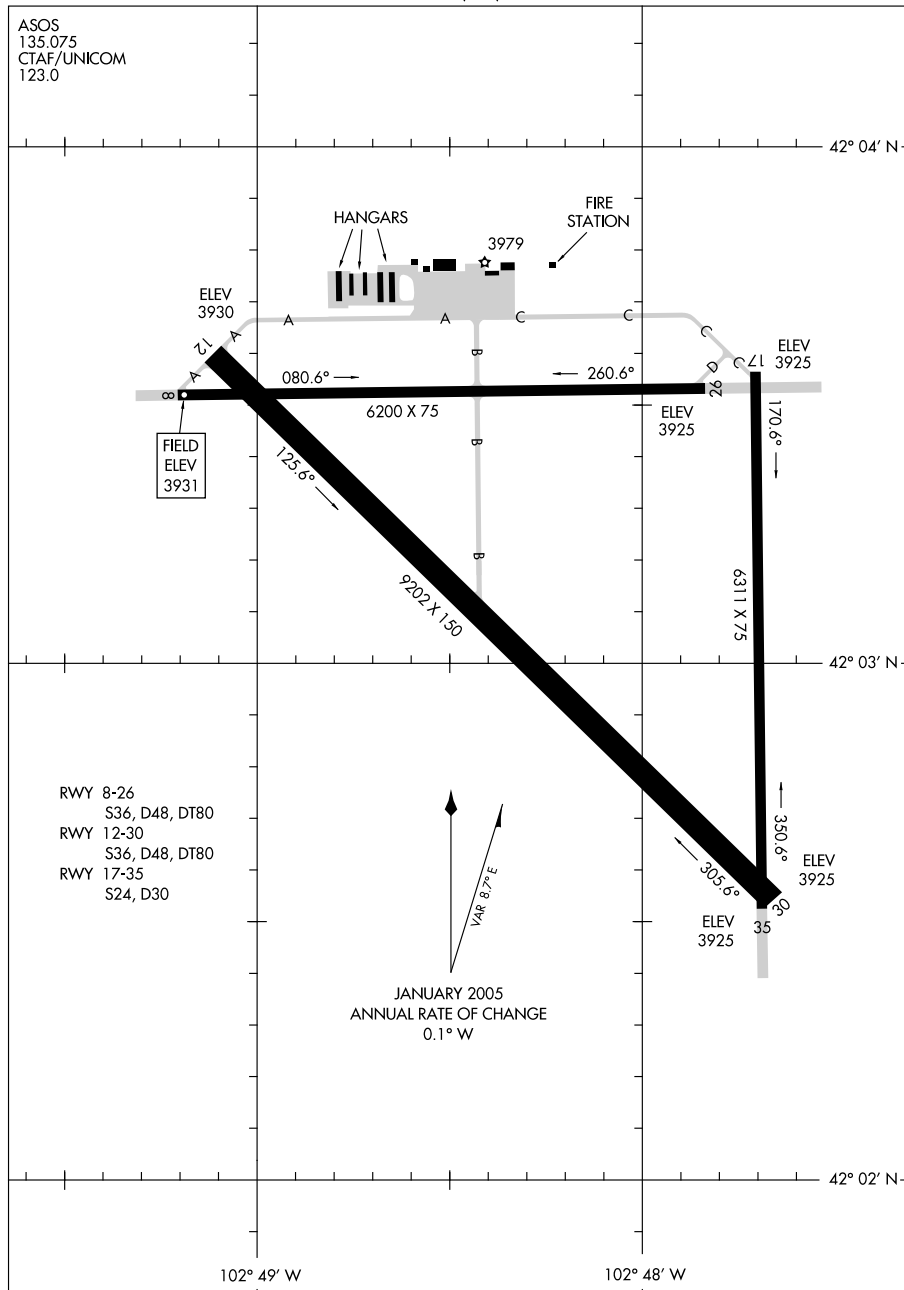ALLIANCE MUNI (AIA)
ALLIANCE, NEBRASKA

AIRPORT DIAGRAM

09183


ALLIANCE, NEBRASKA
ALLIANCE MUNI (AIA)

10098

AIRPORT DIAGRAM

AL-51 (FAA)

BISMARCK MUNI (BIS)
BISMARCK, NORTH DAKOTA

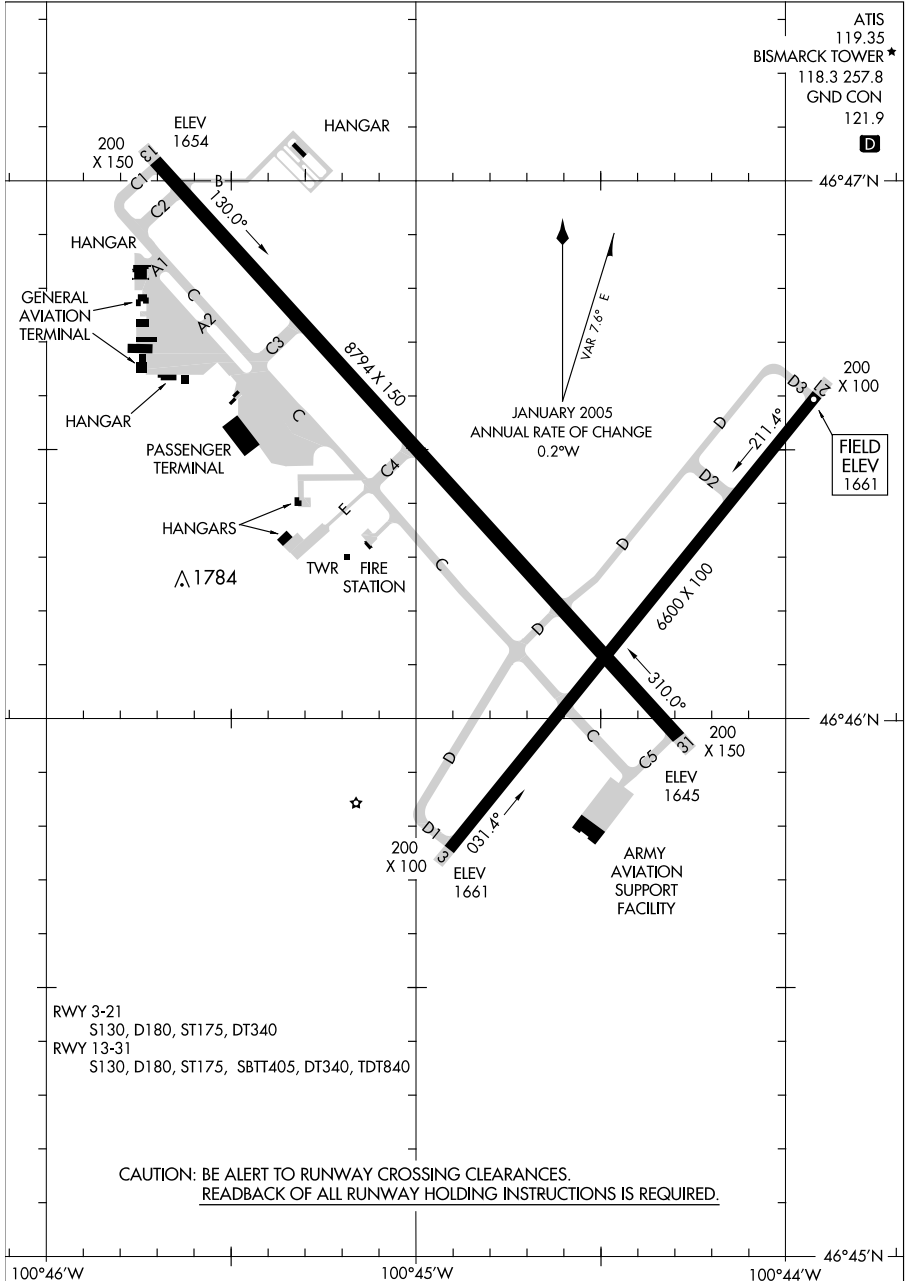

AIRPORT DIAGRAM


10098

BISMARCK, NORTH DAKOTA
BISMARCK MUNI (BIS)

10042

AIRPORT DIAGRAM

AL-10372 (FAA)

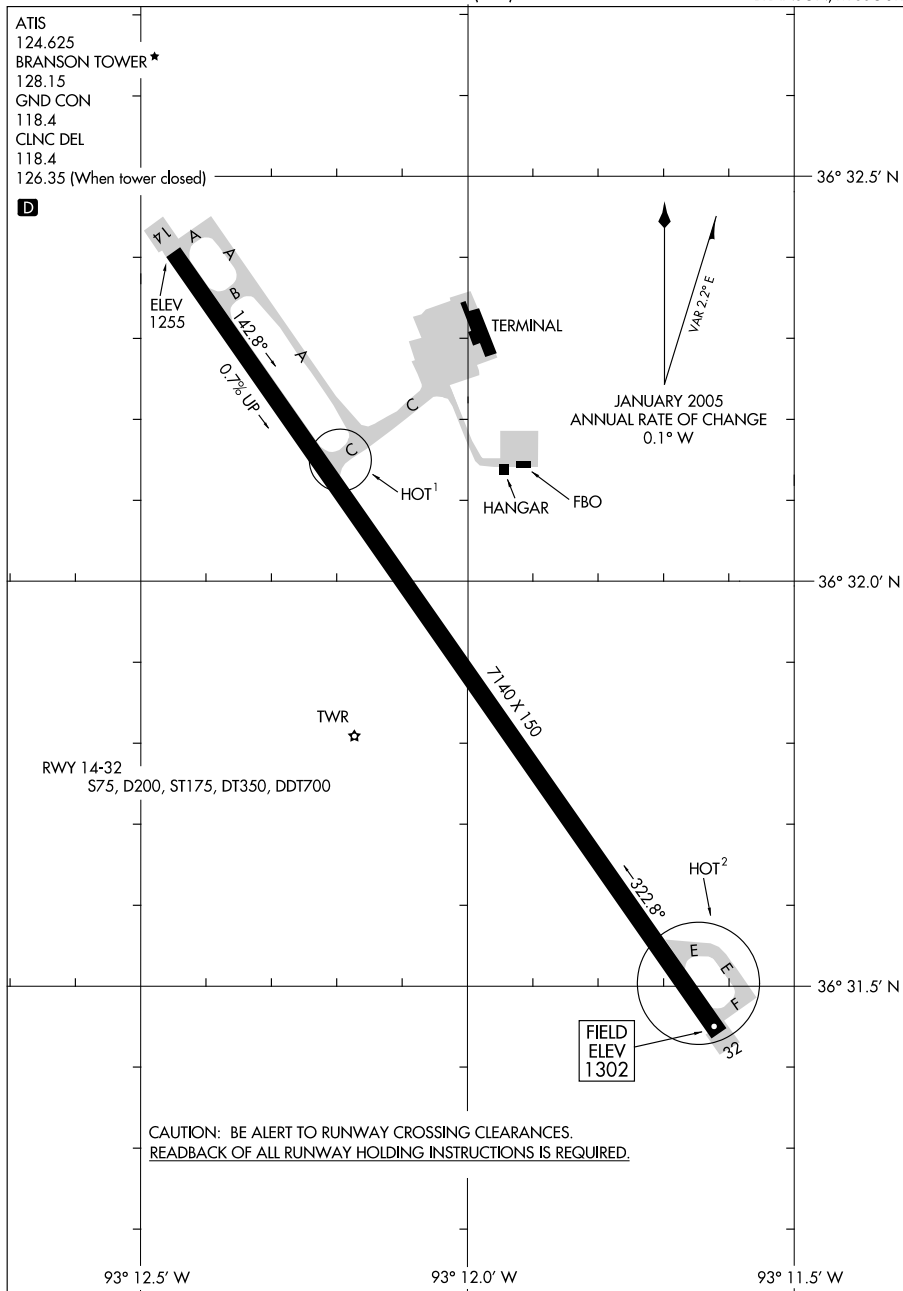BRANSON (BBG)
BRANSON, MISSOURI

AIRPORT DIAGRAM

10042

BRANSON, MISSOURI
BRANSON (BBG)


09071

AIRPORT DIAGRAM

BURLINGTON/SOUTHEAST IOWA RGNL (BRL)

AL-69 (FAA)

BURLINGTON, IOWA

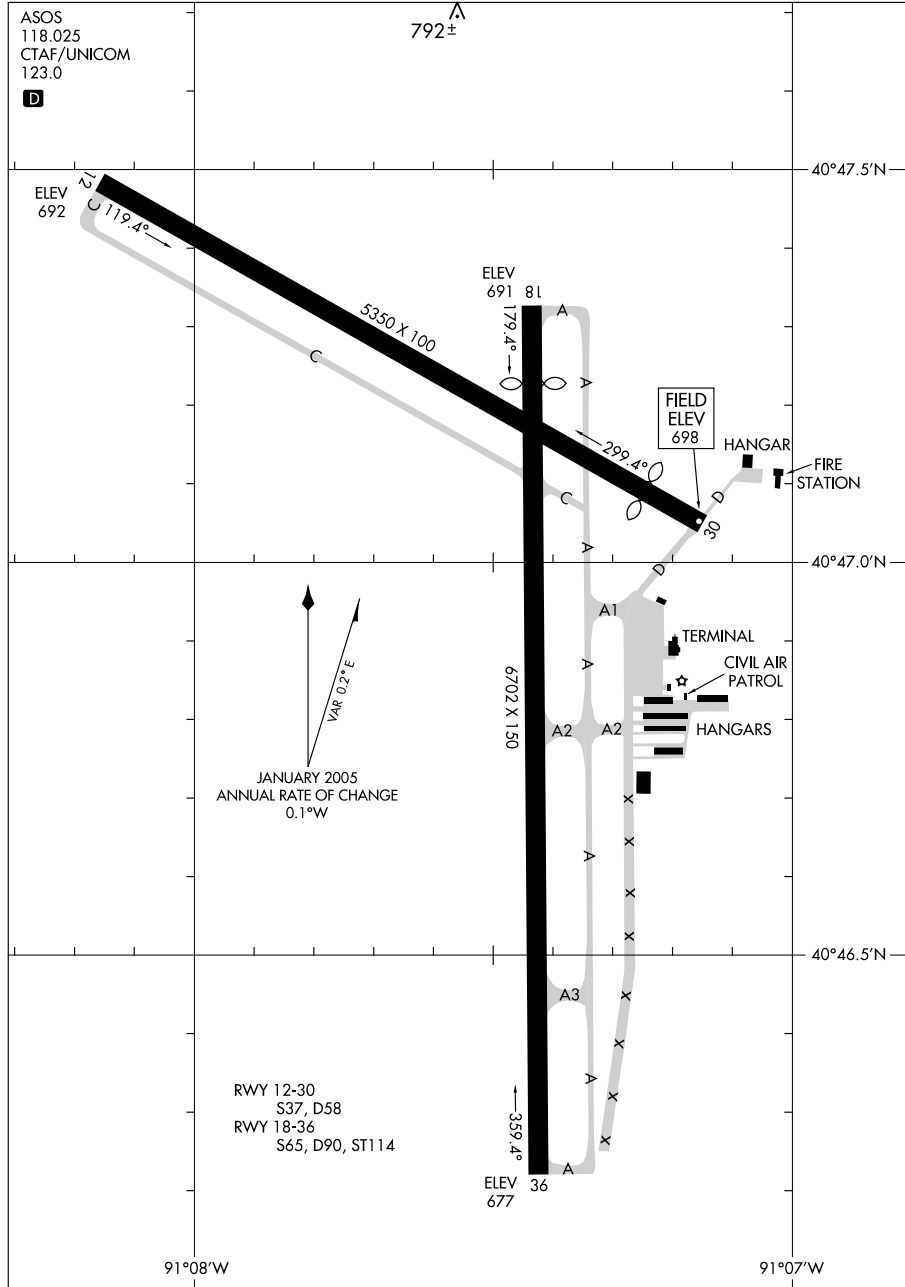

AIRPORT DIAGRAM


09071

BURLINGTON, IOWA
BURLINGTON/SOUTHEAST IOWA RGNL (BRL)

09295

AIRPORT DIAGRAM

AL-943 (FAA)

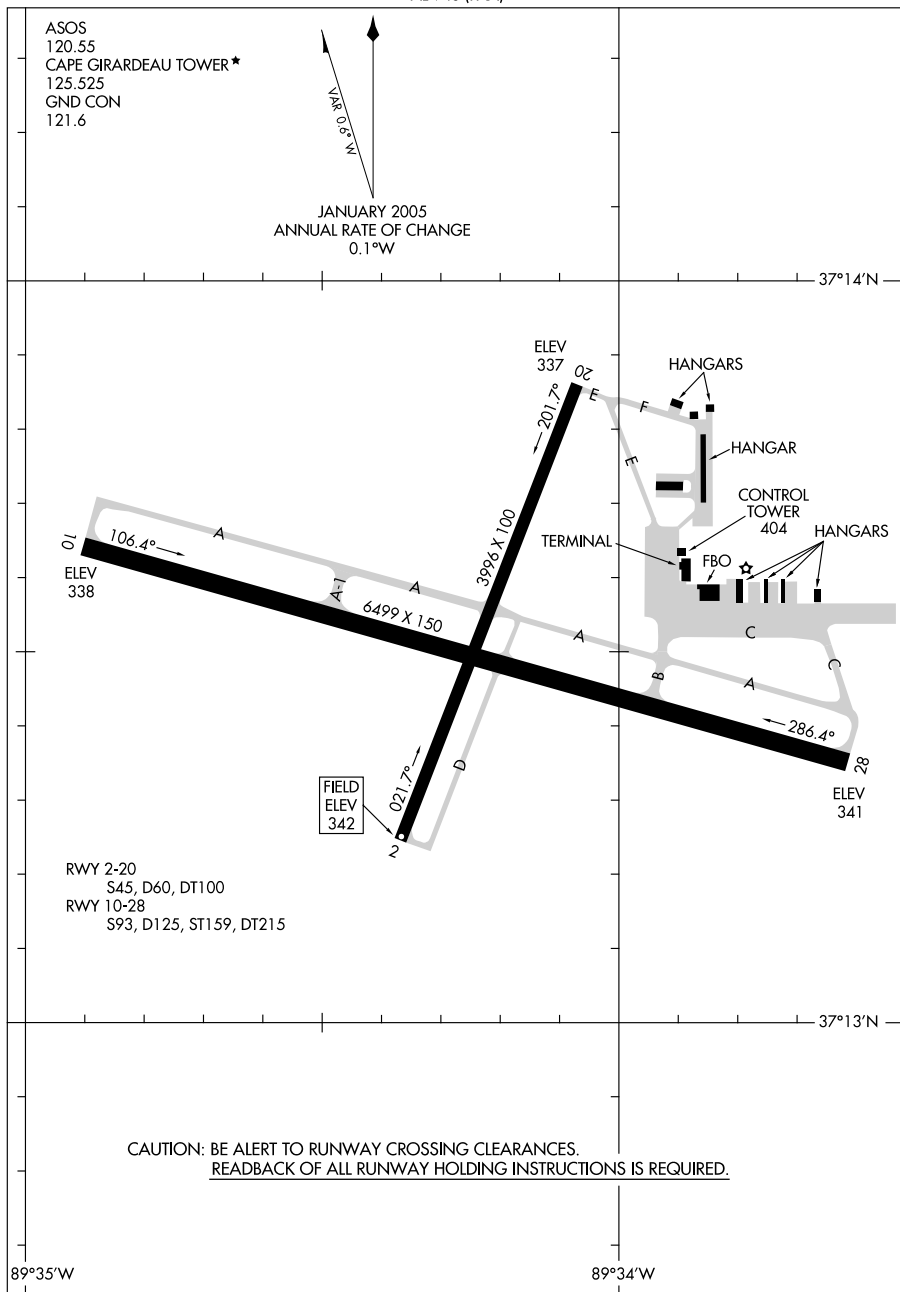CAPE GIRARDEAU RGNL (CGI)
CAPE GIRARDEAU, MISSOURI

AIRPORT DIAGRAM

09295


CAPE GIRARDEAU, MISSOURI
CAPE GIRARDEAU RGNL (CGI)

10154

AIRPORT DIAGRAM

CEDAR RAPIDS/THE EASTERN IOWA (CID)
CEDAR RAPIDS, IOWA

AL-250 (FAA)

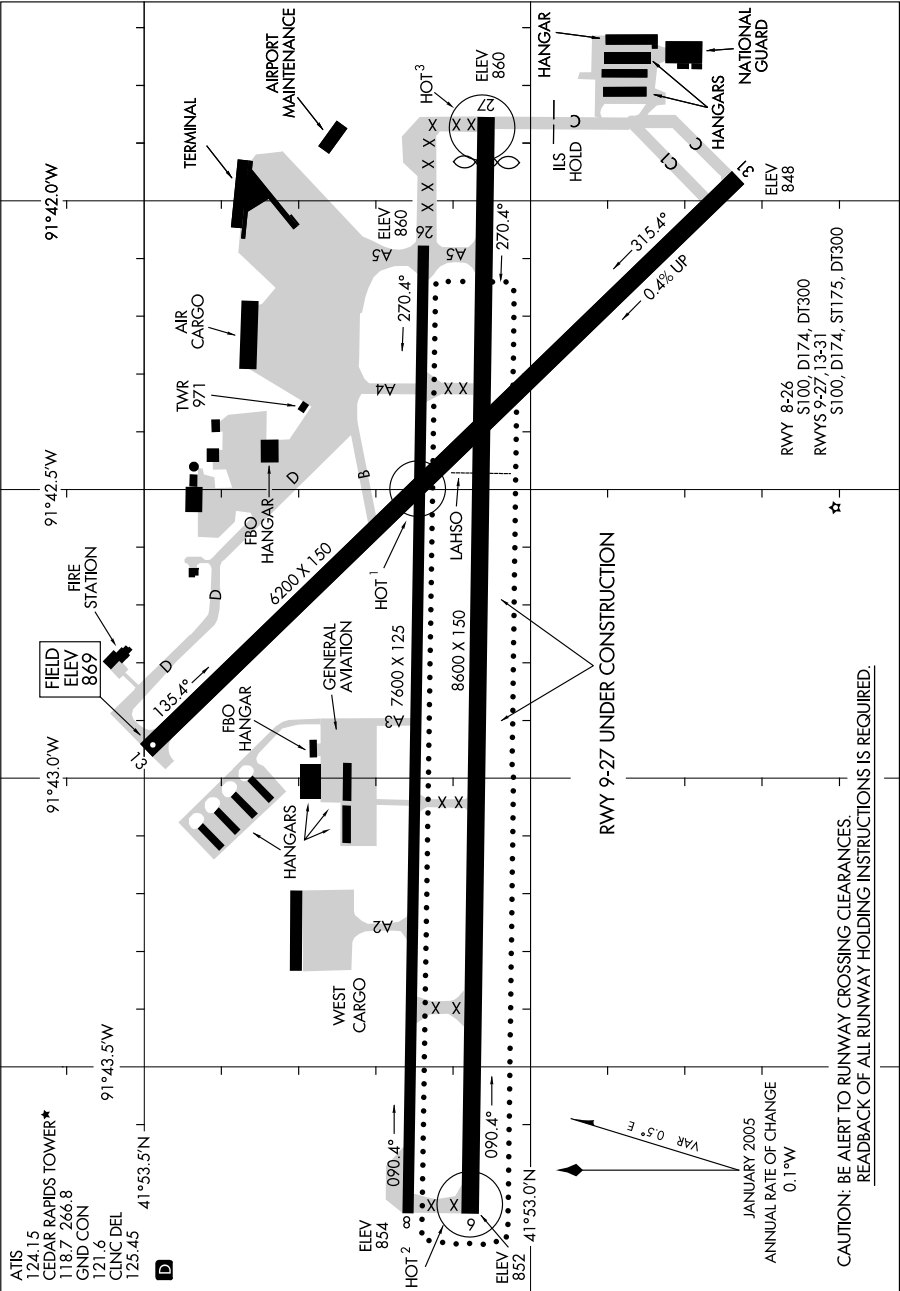

AIRPORT DIAGRAM

CEDAR RAPIDS, IOWA
CEDAR RAPIDS/THE EASTERN IOWA (CID)


10154

09071

AIRPORT DIAGRAM

AL-972 (FAA)

CLINTON MUNI (CWI)
CLINTON, IOWA

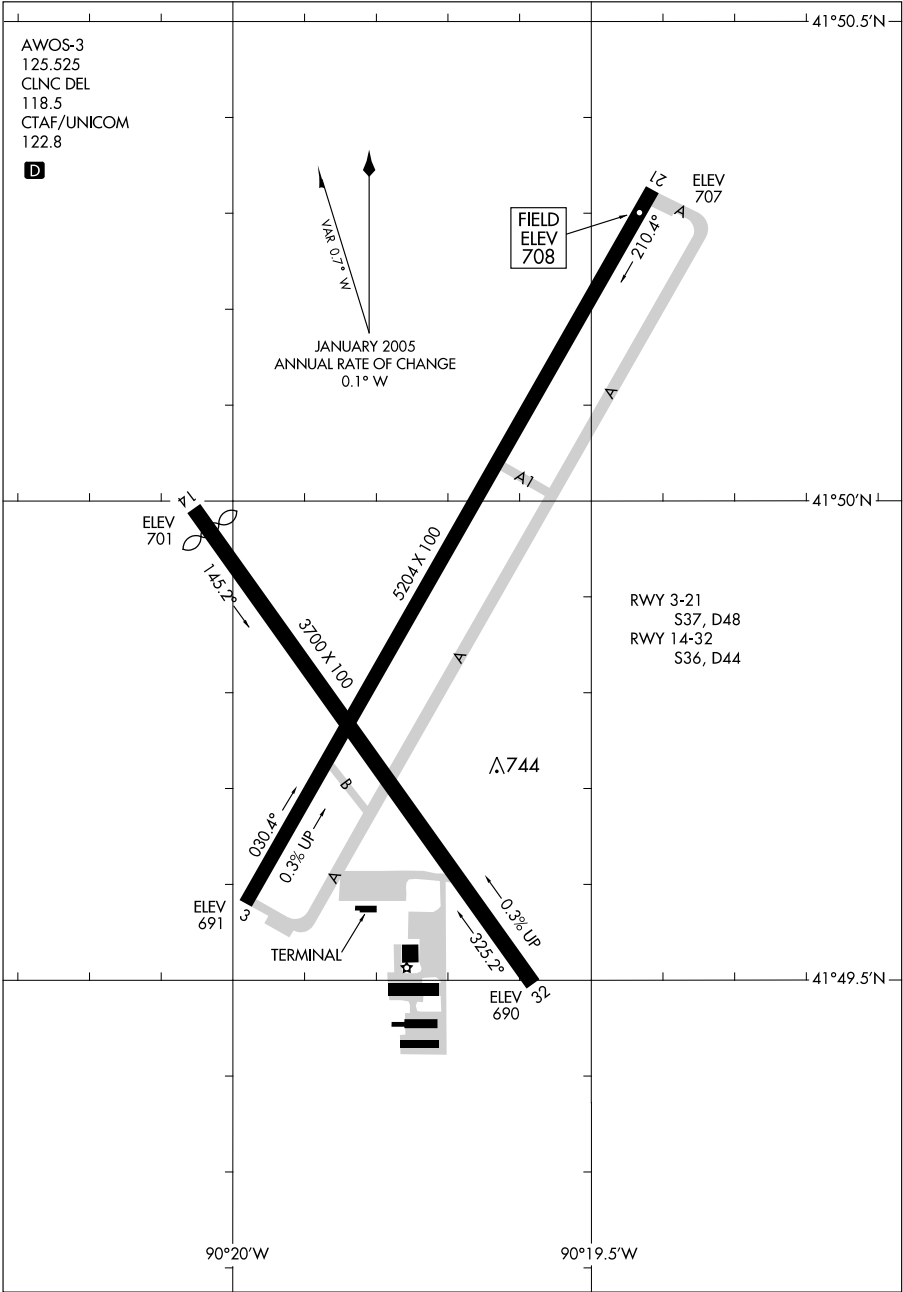

AIRPORT DIAGRAM


09071

CLINTON, IOWA
CLINTON MUNI (CWI)

09295

AIRPORT DIAGRAM

AL-117 (FAA)

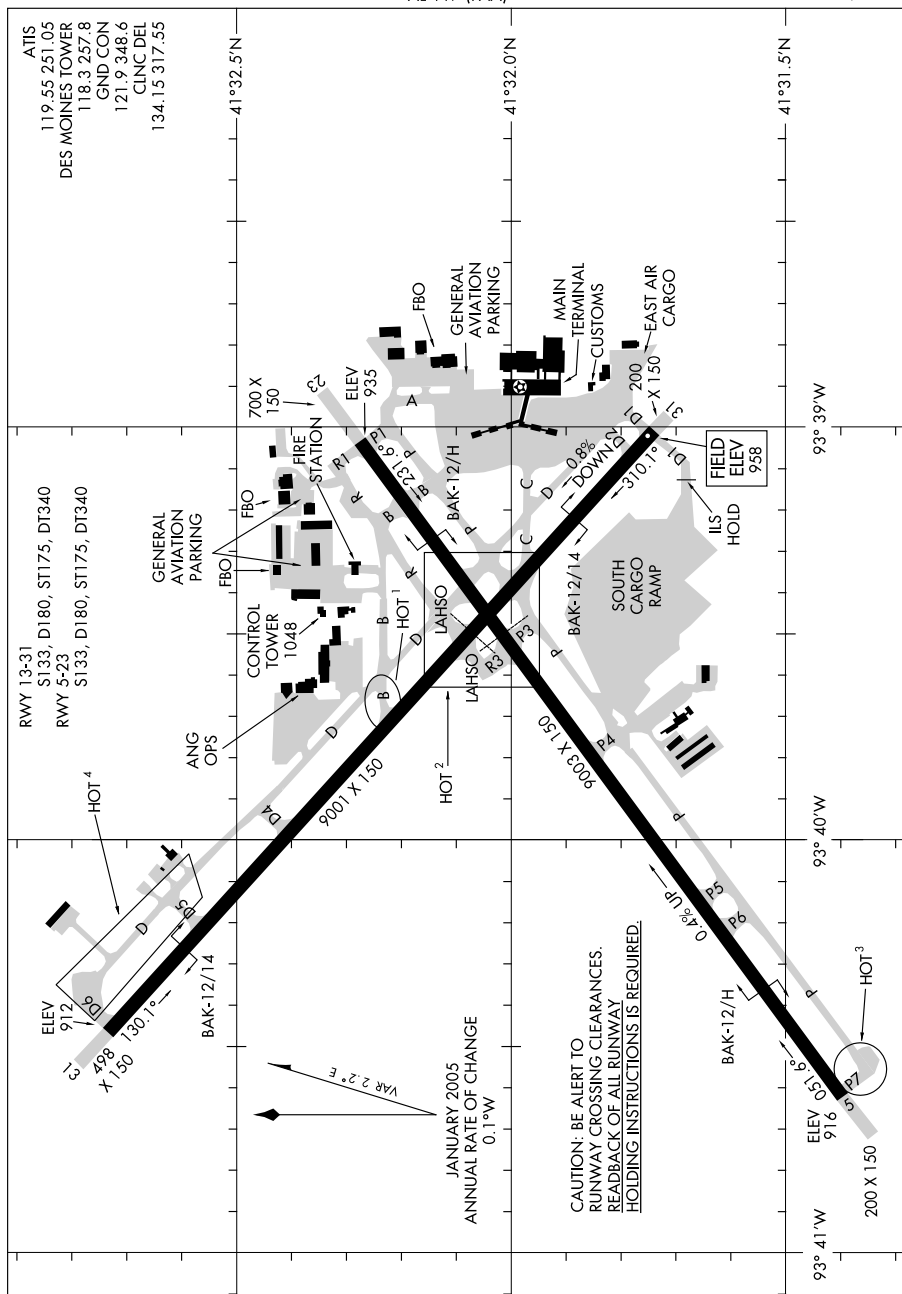DES MOINES INTL (DSM)
DES MOINES, IOWA

AIRPORT DIAGRAM

09295

DES MOINES, IOWA
DES MOINES INTL (DSM)


10154

AIRPORT DIAGRAM

AL-676 (FAA)

DODGE CITY RGNL (DDC)
DODGE CITY, KANSAS

ASOS
118.525
CTAF/UNICOM
122.7

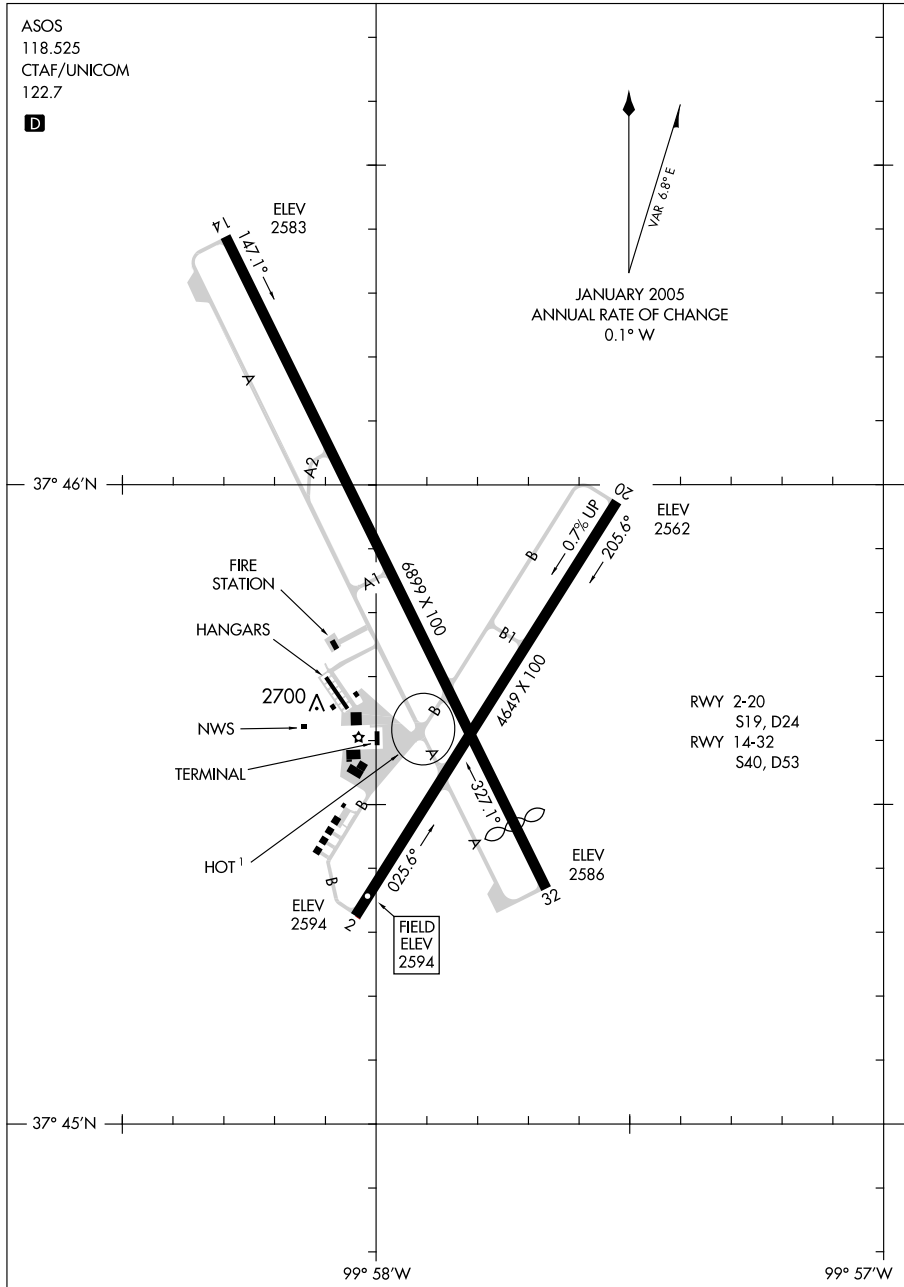

AIRPORT DIAGRAM

10154

DODGE CITY, KANSAS
DODGE CITY RGNL (DDC)


10042

AIRPORT DIAGRAM

AL-923 (FAA)

DUBUQUE RGNL (DBQ)

DUBUQUE, IOWA

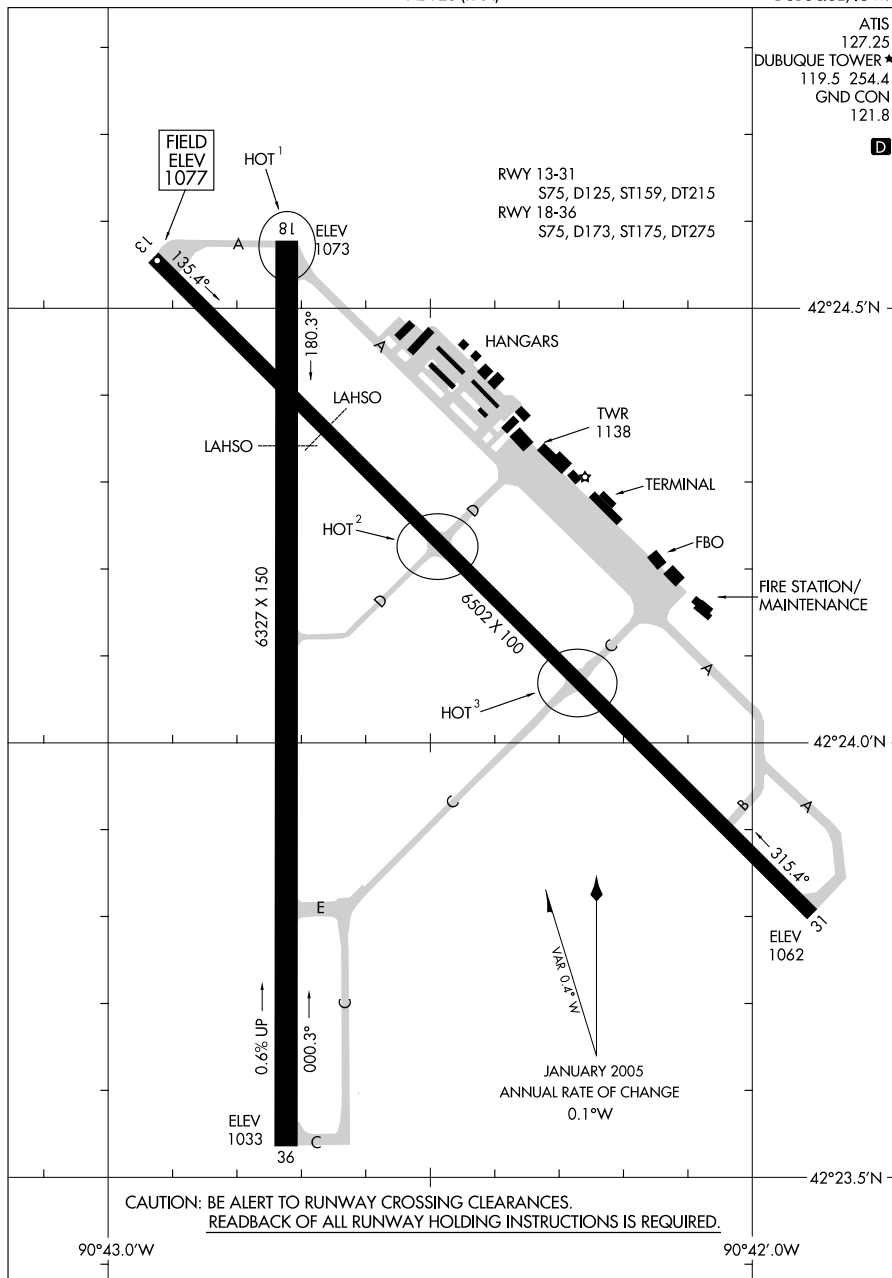


AIRPORT DIAGRAM

10042

DUBUQUE, IOWA
DUBUQUE RGNL (DBQ)

10154

AIRPORT DIAGRAM

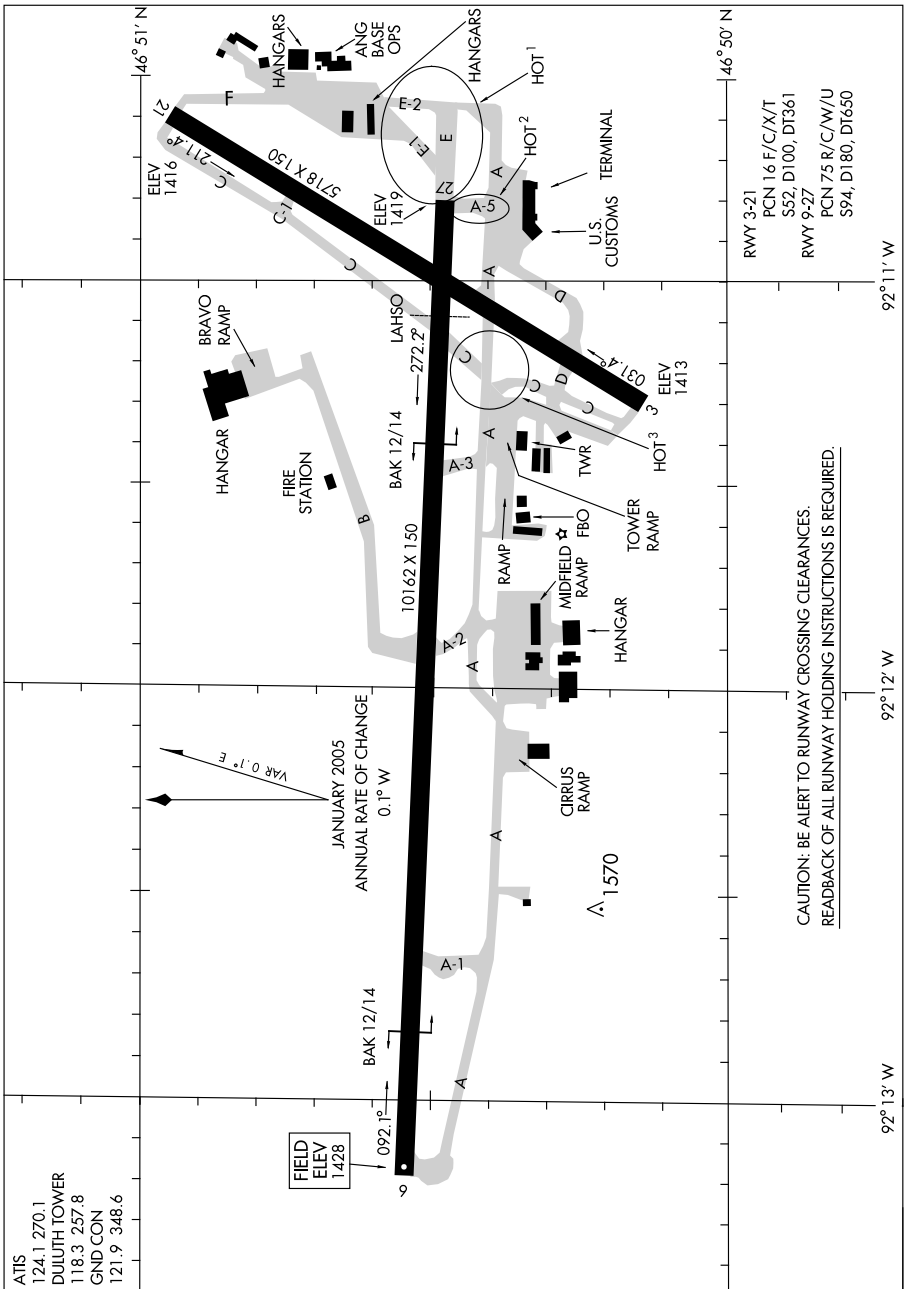DULUTH INTL (DLH)
DULUTH, MINNESOTA

AIRPORT DIAGRAM

10154

DULUTH, MINNESOTA
DULUTH INTL (DLH)


09239

AIRPORT DIAGRAM

AFD-343 [USAF]

ELLSWORTH AFB (KRCA)

RAPID CITY, SOUTH DAKOTA

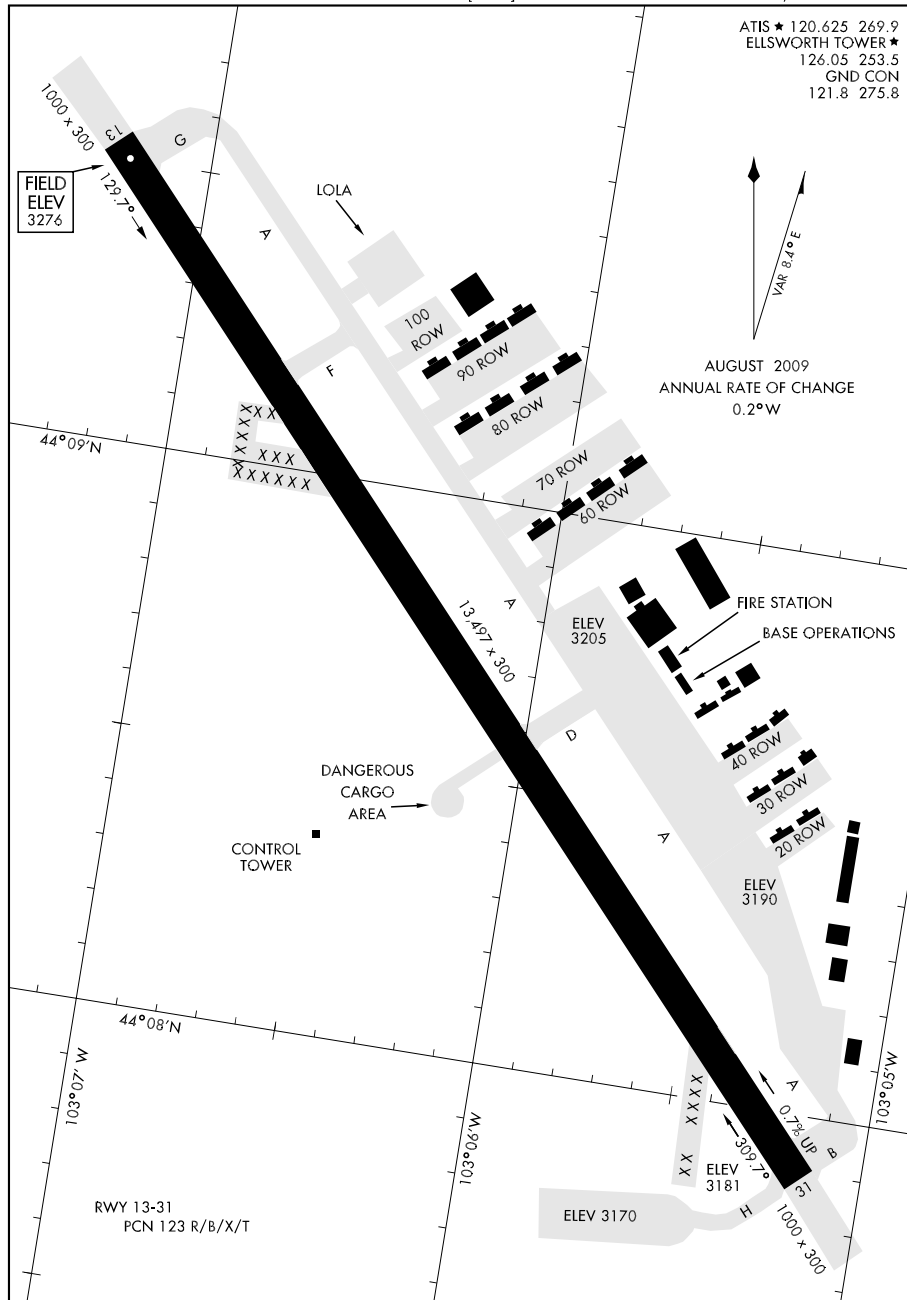


AIRPORT DIAGRAM

RAPID CITY, SOUTH DAKOTA
ELLSWORTH AFB (KRCA)

09295

AIRPORT DIAGRAM

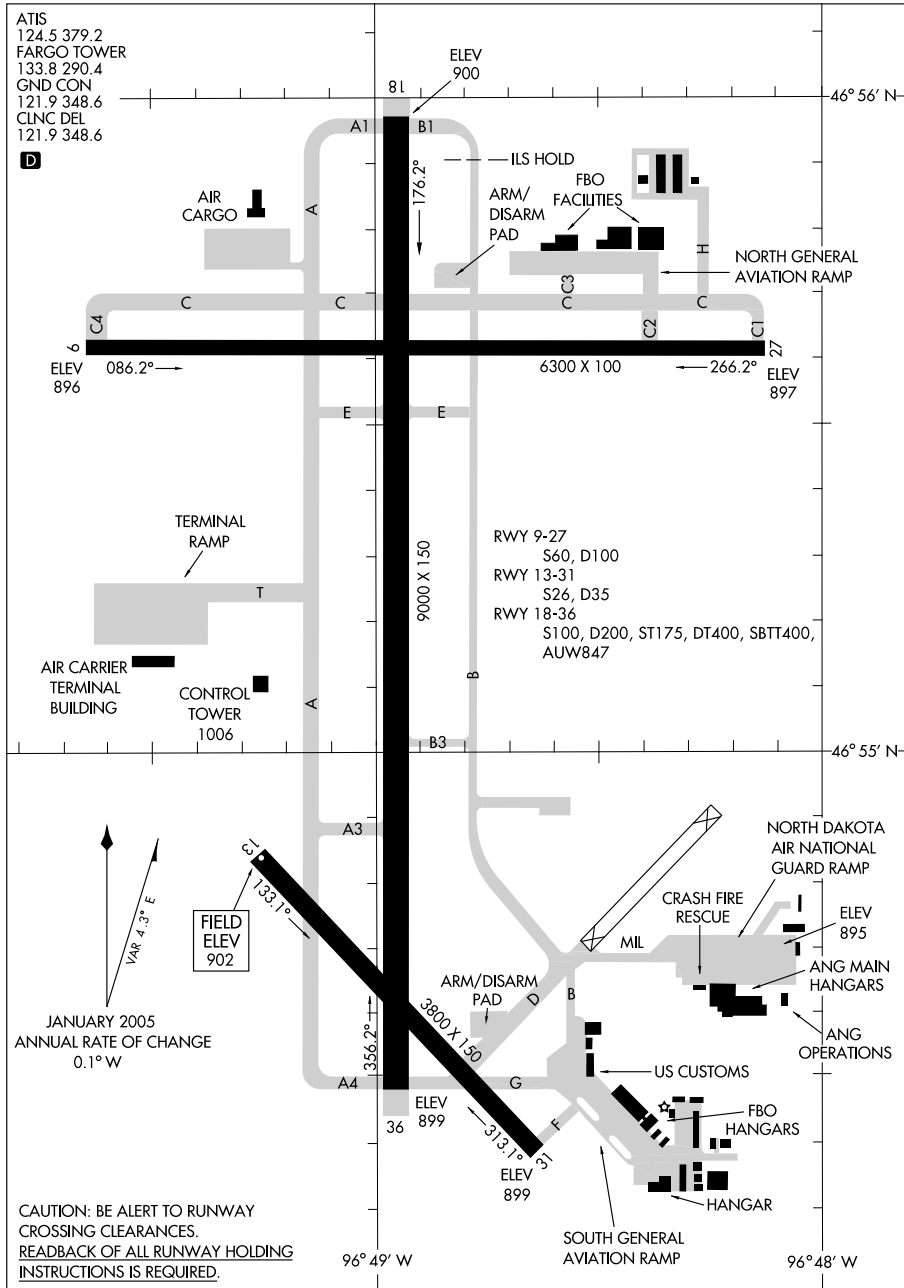FARGO/HECTOR INTL (F.A.R.)
FARGO, NORTH DAKOTA

AIRPORT DIAGRAM

09295

FARGO, NORTH DAKOTA
FARGO/HECTOR INTL (F.A.R.)


10042

FT. LEONARD WOOD/WAYNESVILLE-ST. ROBERT RGNL FORNEY FIELD (TBN)

AIRPORT DIAGRAM

AL-5093 (FAA)

FT. LEONARD WOOD, MISSOURI

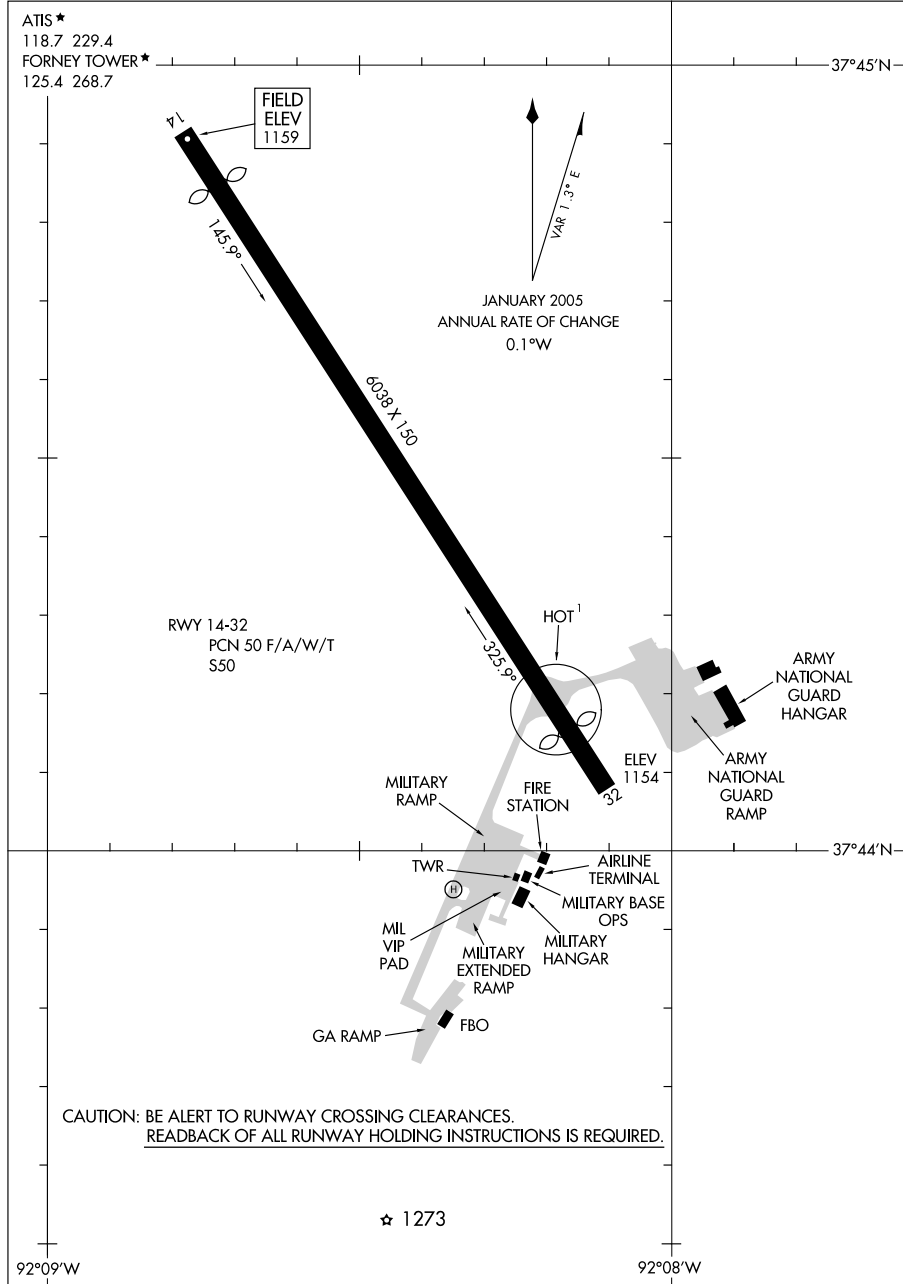

AIRPORT DIAGRAM

FT. LEONARD WOOD, MISSOURI


10042

FT. LEONARD WOOD/WAYNESVILLE-ST. ROBERT RGNL FORNEY FIELD (TBN)

09295

AIRPORT DIAGRAM

GARDEN CITY RGNL (GCK)
GARDEN CITY, KANSAS

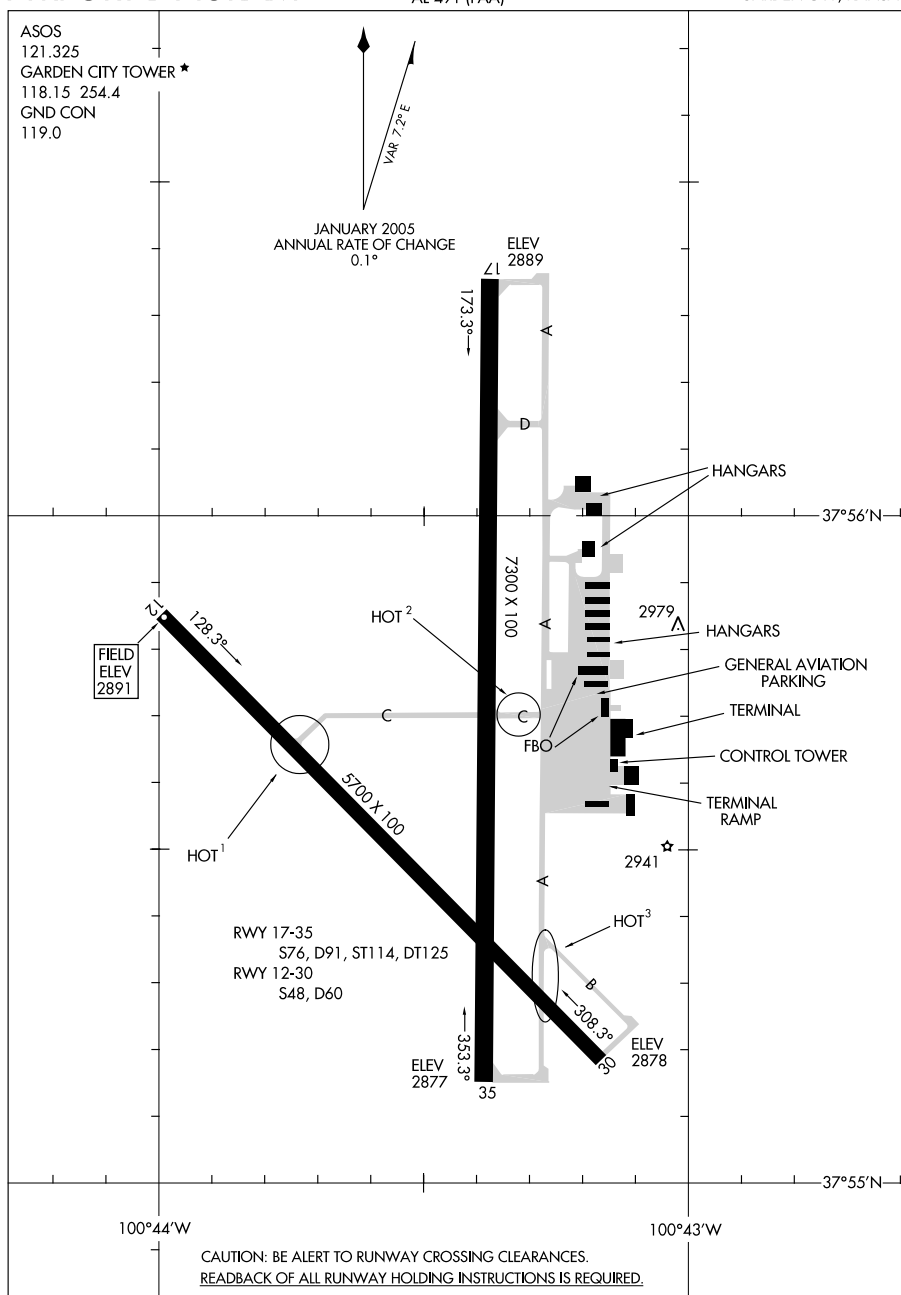

AIRPORT DIAGRAM


09295

GARDEN CITY, KANSAS
GARDEN CITY RGNL (GCK)

06271

AIRPORT DIAGRAM

GOODLAND/RENNER FIELD/GOODLAND MUNI (GLD)
AL-684 (FAA) GOODLAND, KANSAS

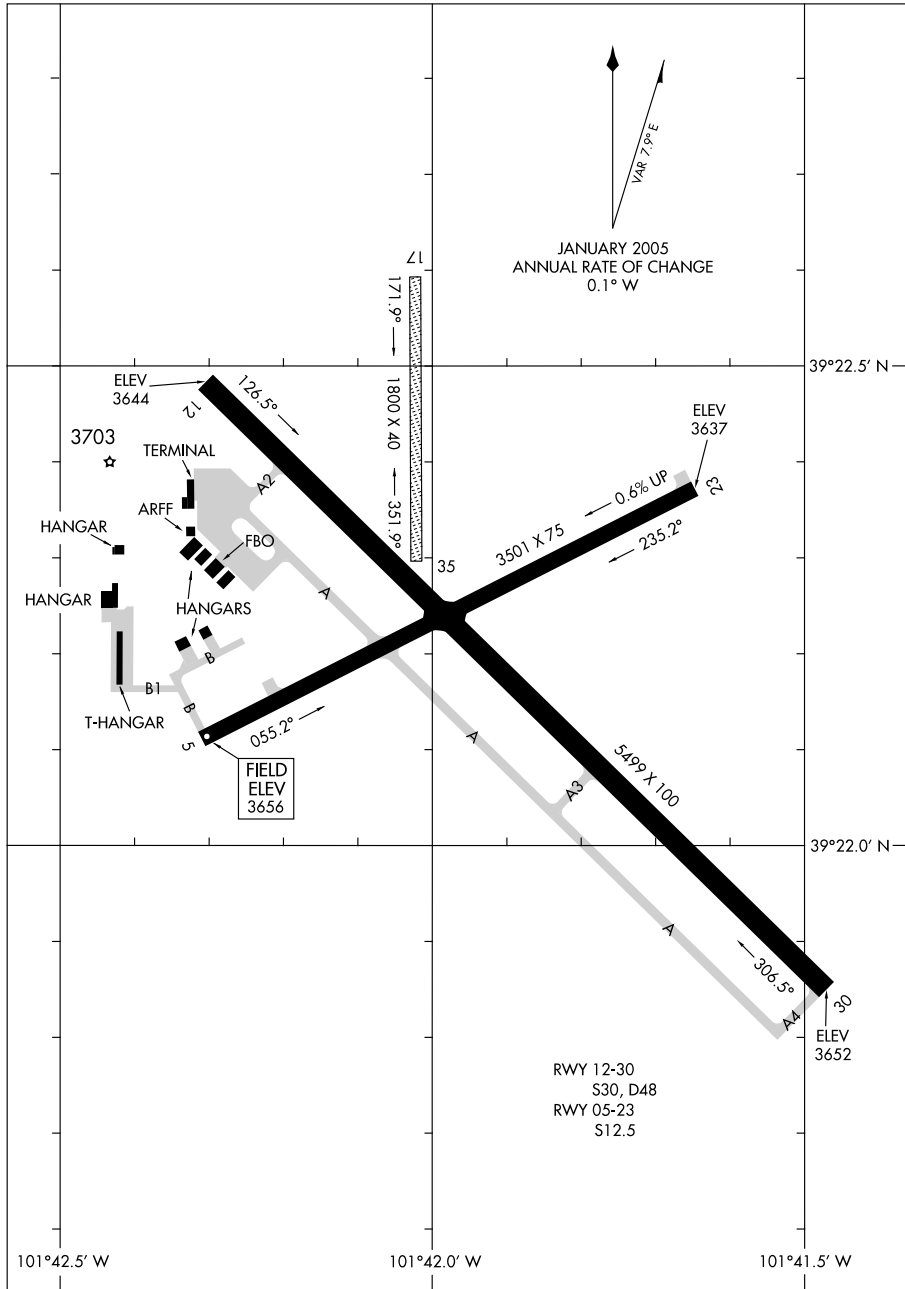

AIRPORT DIAGRAM

06271

39°22' N - 101°42' W

GOODLAND, KANSAS
GOODLAND/RENNER FIELD/GOODLAND MUNI (GLD)


09239

AIRPORT DIAGRAM

AFD-5010 [USAF]

GRAND FORKS AFB (KRDR)

GRAND FORKS, NORTH DAKOTA

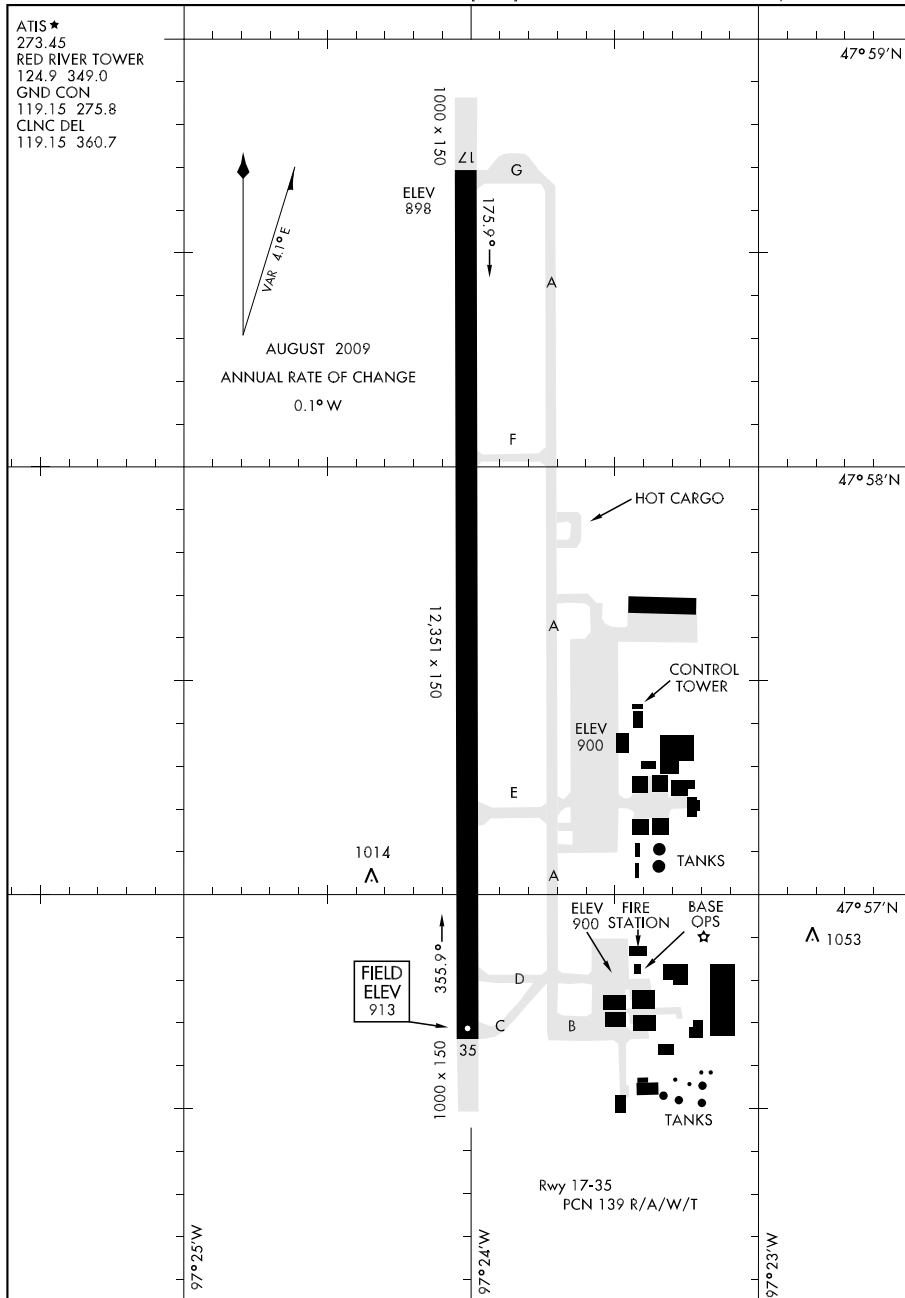


AIRPORT DIAGRAM

 GRAND FORKS, NORTH DAKOTA
 GRAND FORKS AFB (KRDR)

10154

AIRPORT DIAGRAM

AL-5187 (FAA)

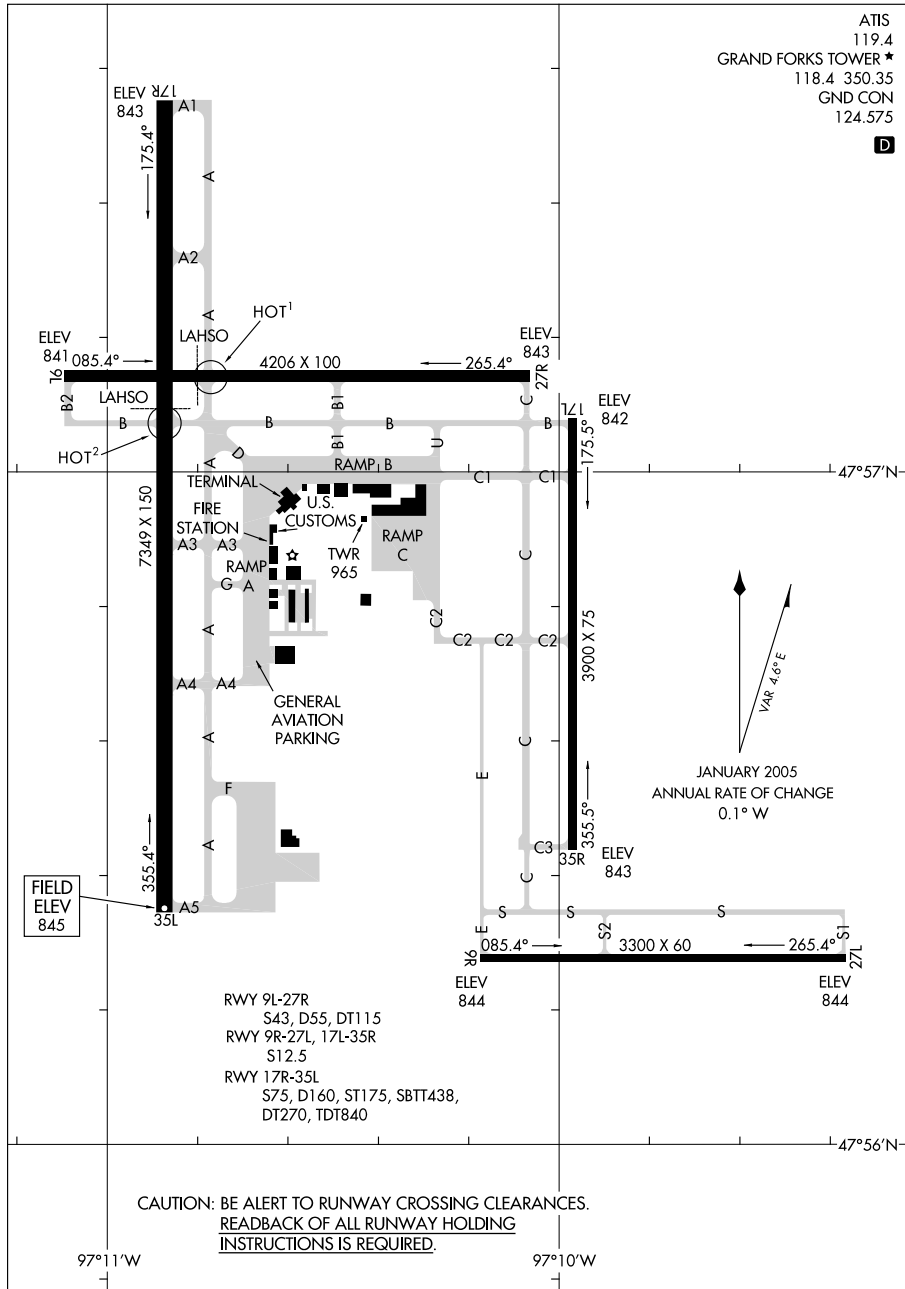GRAND FORKS INTL (GFK)
GRAND FORKS, NORTH DAKOTA

AIRPORT DIAGRAM

10154

GRAND FORKS, NORTH DAKOTA
GRAND FORKS INTL (GFK)

10154

AIRPORT DIAGRAM

GRAND ISLAND/ CENTRAL NEBRASKA RGNL (GRI)

AL-173 (FAA)

GRAND ISLAND, NEBRASKA

ATIS

127.4

GRAND ISLAND TOWER ★

118.2 388.2


GND CON

121.9 388.2

CLNC DEL

121.9

126.05 (When Tower Closed)

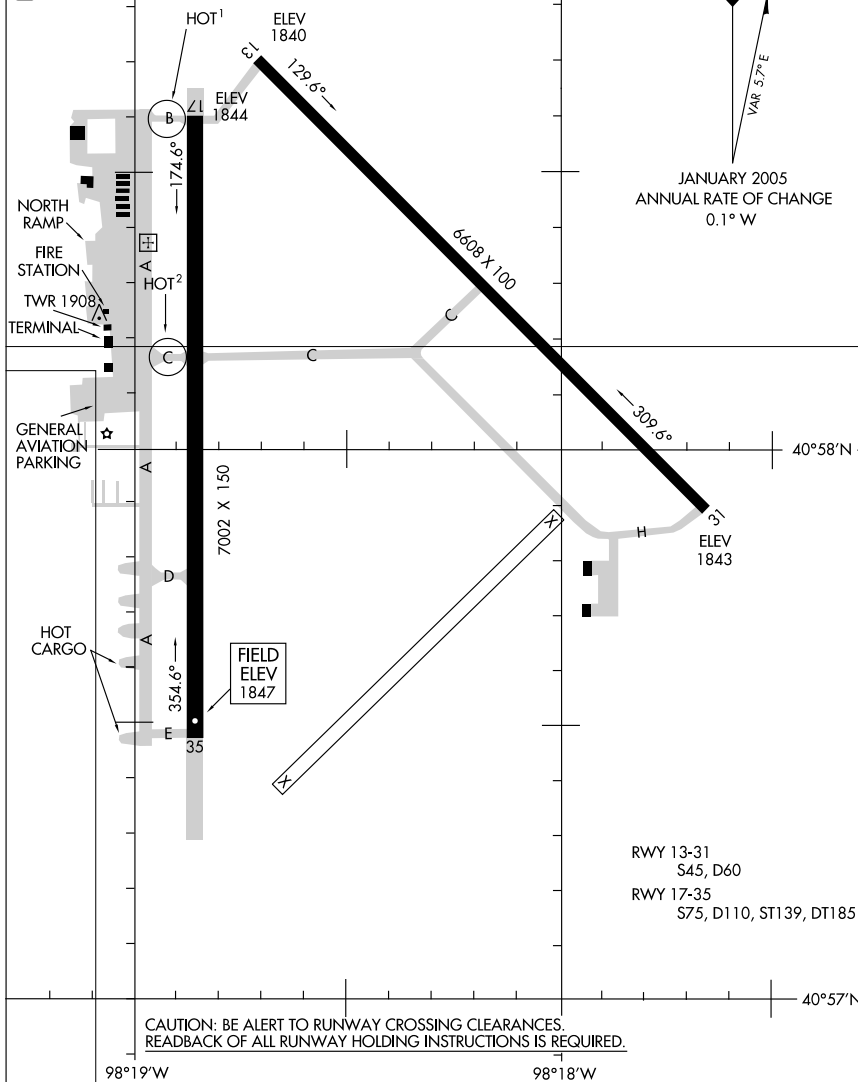

AIRPORT DIAGRAM

GRAND ISLAND, NEBRASKA


GRAND ISLAND/ CENTRAL NEBRASKA RGNL (GRI)

10154

10042
AIRPORT DIAGRAM


AL-175 (FAA)

GREAT BEND MUNI (GBD)
GREAT BEND, KANSAS

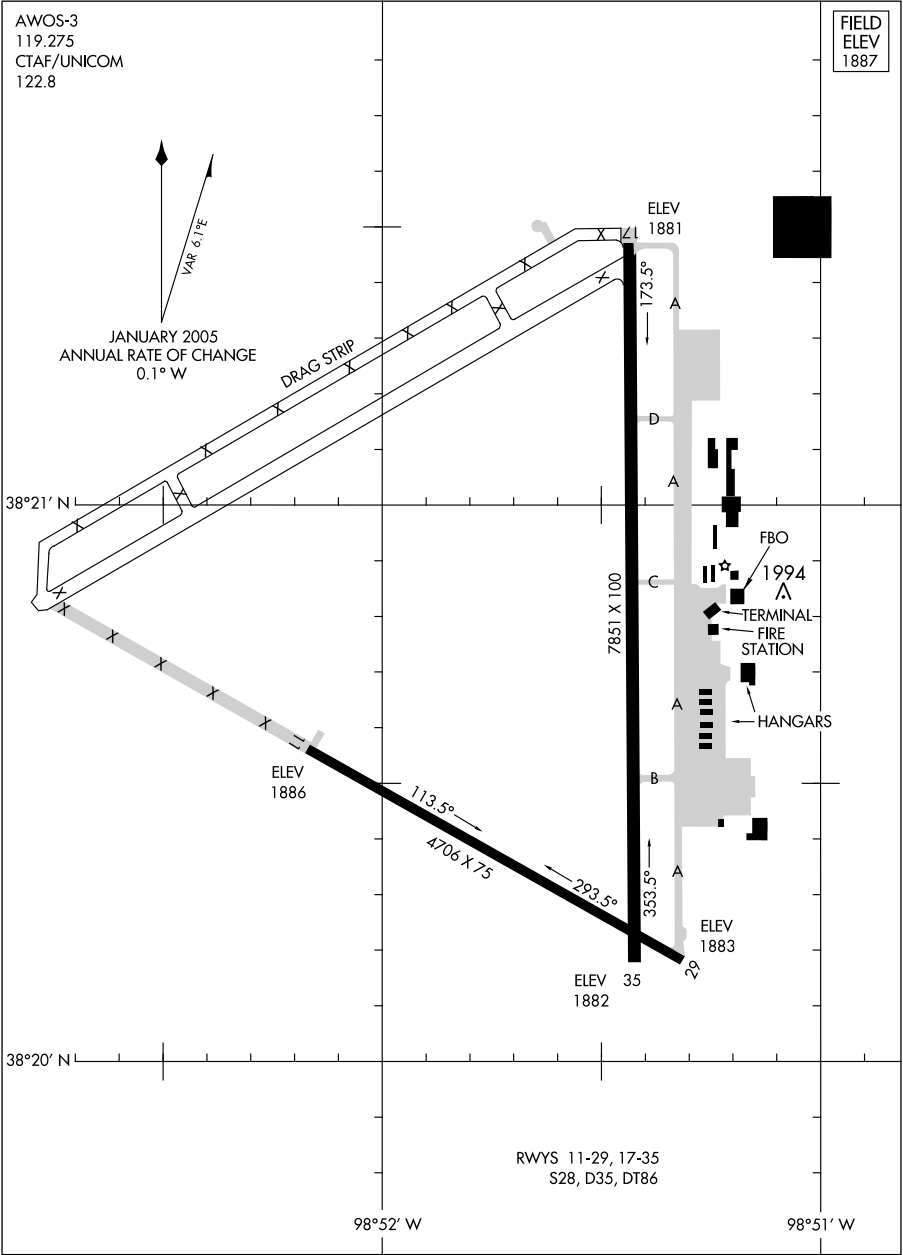

AIRPORT DIAGRAM
10042

GREAT BEND, KANSAS
GREAT BEND MUNI (GBD)

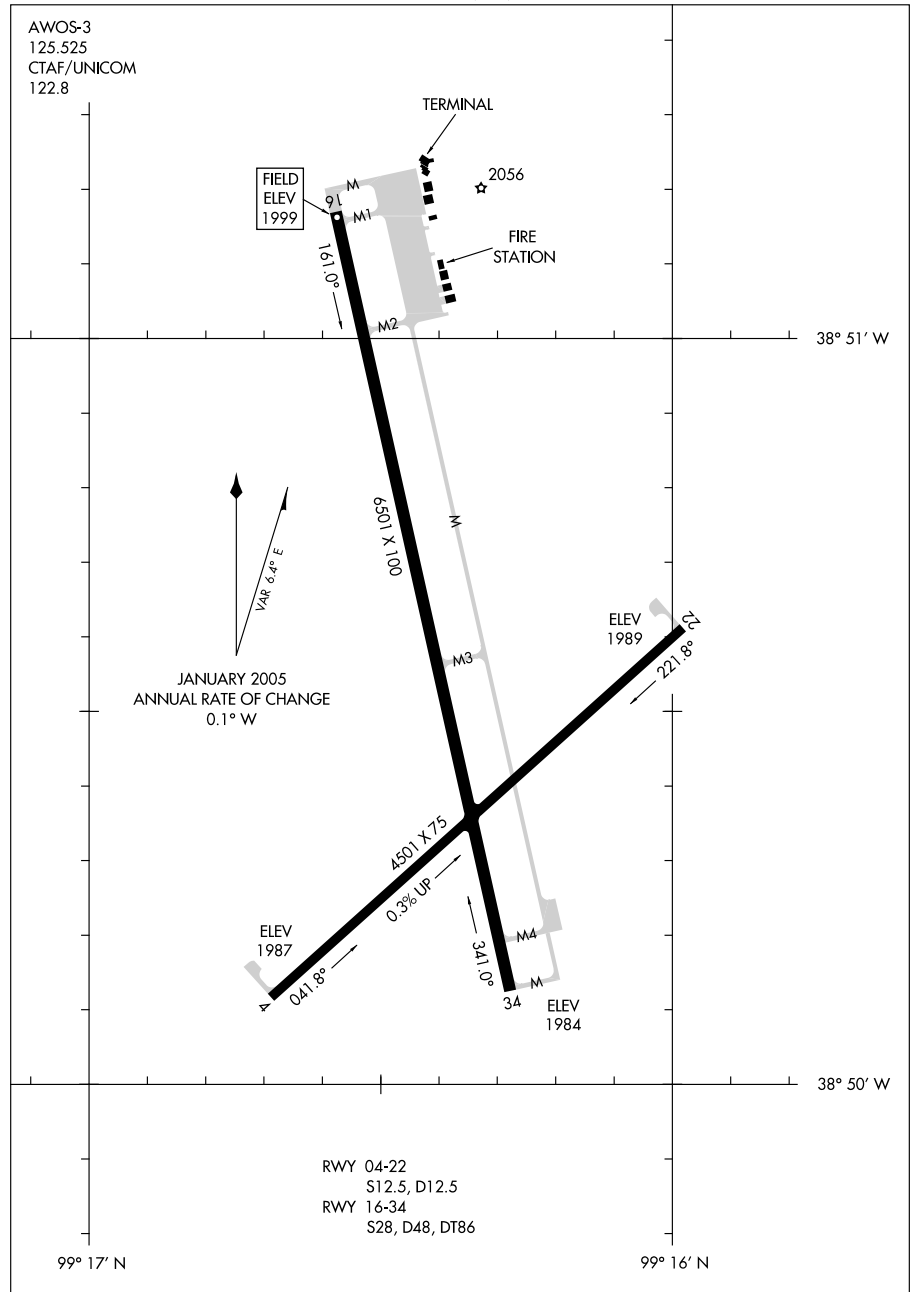


09351

AIRPORT DIAGRAM

JEFFERSON CITY MEMORIAL (JEF)
JEFFERSON CITY, MISSOURI

AL-796 (FAA)

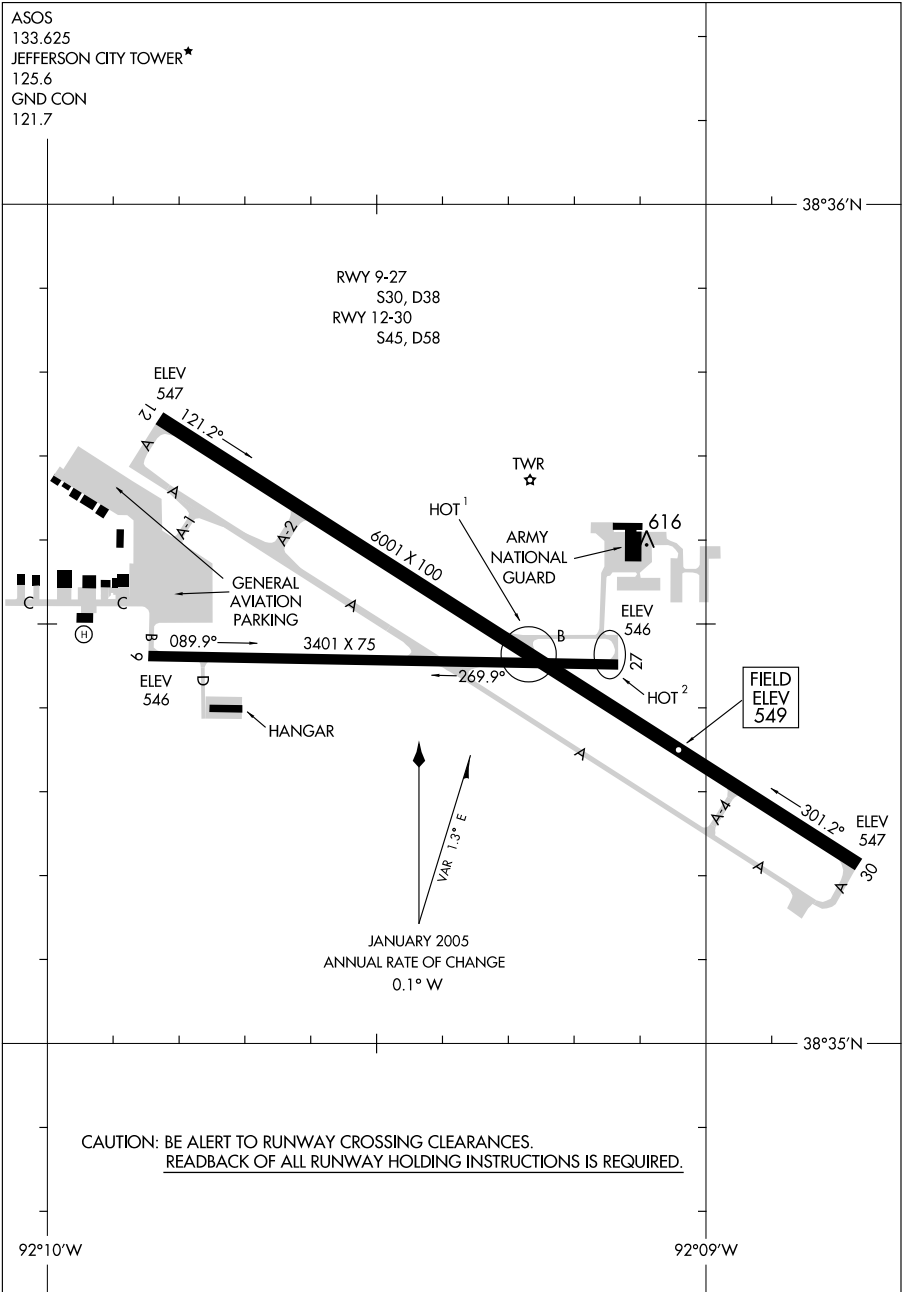


AIRPORT DIAGRAM

09351

JEFFERSON CITY, MISSOURI
JEFFERSON CITY MEMORIAL (JEF)

JOPLIN, MISSOURI




09295

AIRPORT DIAGRAM

AL-5765 (FAA)

KAISER/LEE C. FINE MEMORIAL (AIZ)
KAISER/LAKE OZARK, MISSOURI

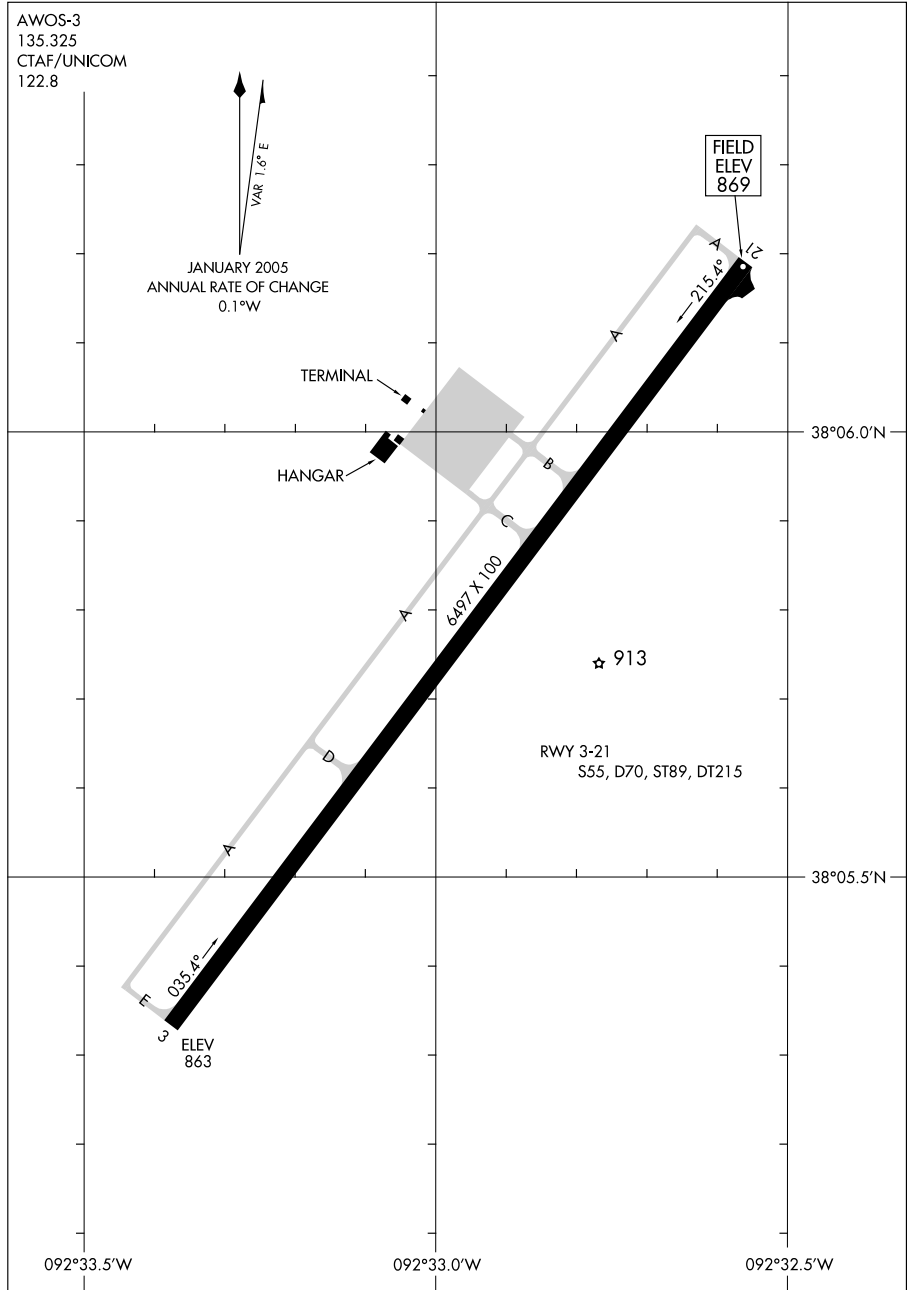

AIRPORT DIAGRAM

09295

KAISER/LAKE OZARK, MISSOURI
KAISER/LEE C. FINE MEMORIAL (AIZ)

AIRPORT DIAGRAM

KANSAS CITY, MISSOURI




KANSAS CITY, MISSOURI
KANSAS CITY/CHARLES B. WHEELER DOWNTOWN (MKC)

09295

AIRPORT DIAGRAM

AL-780 (FAA)

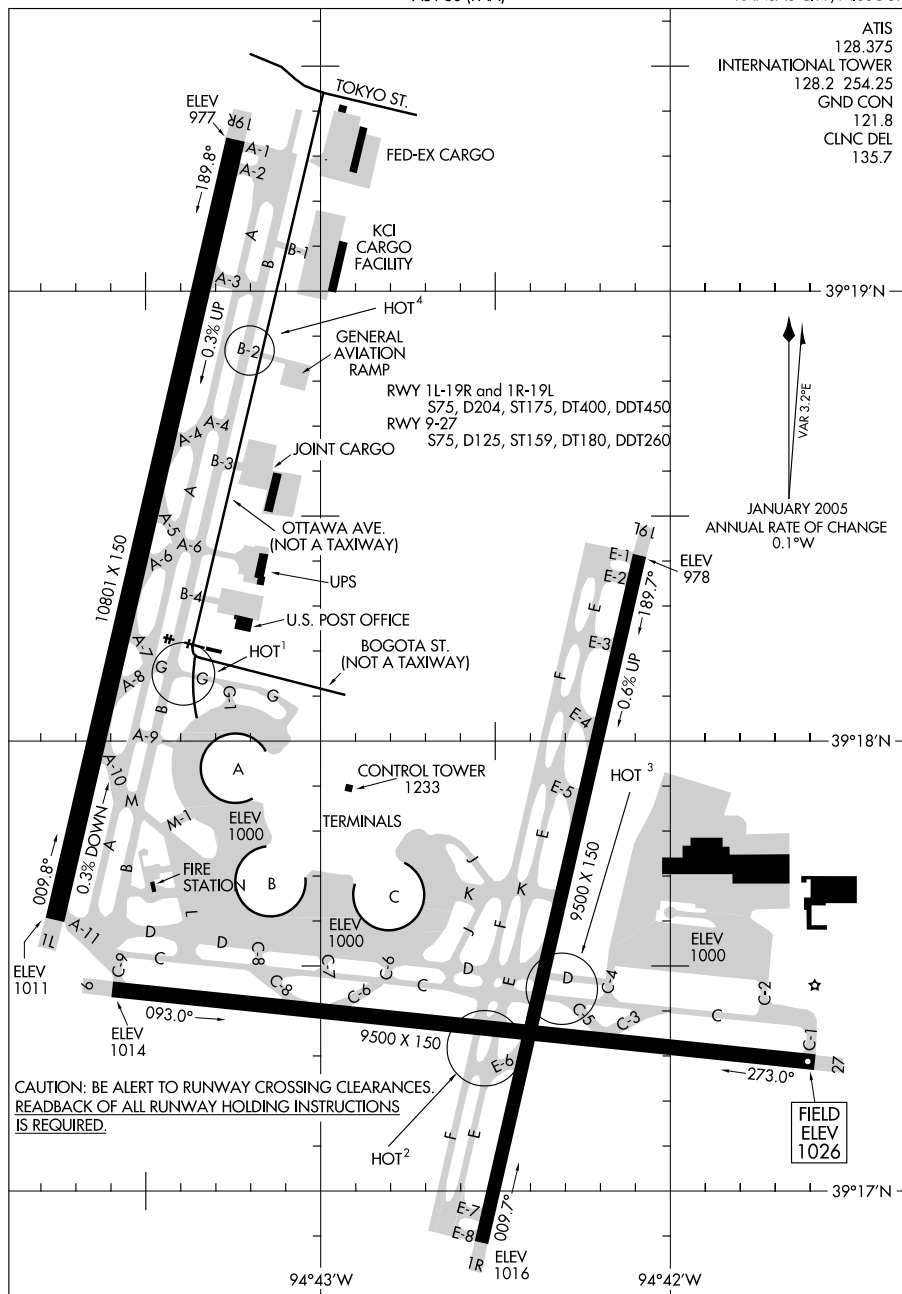KANSAS CITY INTL (MCI)
KANSAS CITY, MISSOURI

AIRPORT DIAGRAM

09295


KANSAS CITY, MISSOURI
KANSAS CITY INTL (MCI)

07298

AIRPORT DIAGRAM

AL-541 (FAA)

KEARNEY RGNL (E.A.R)
KEARNEY, NEBRASKA

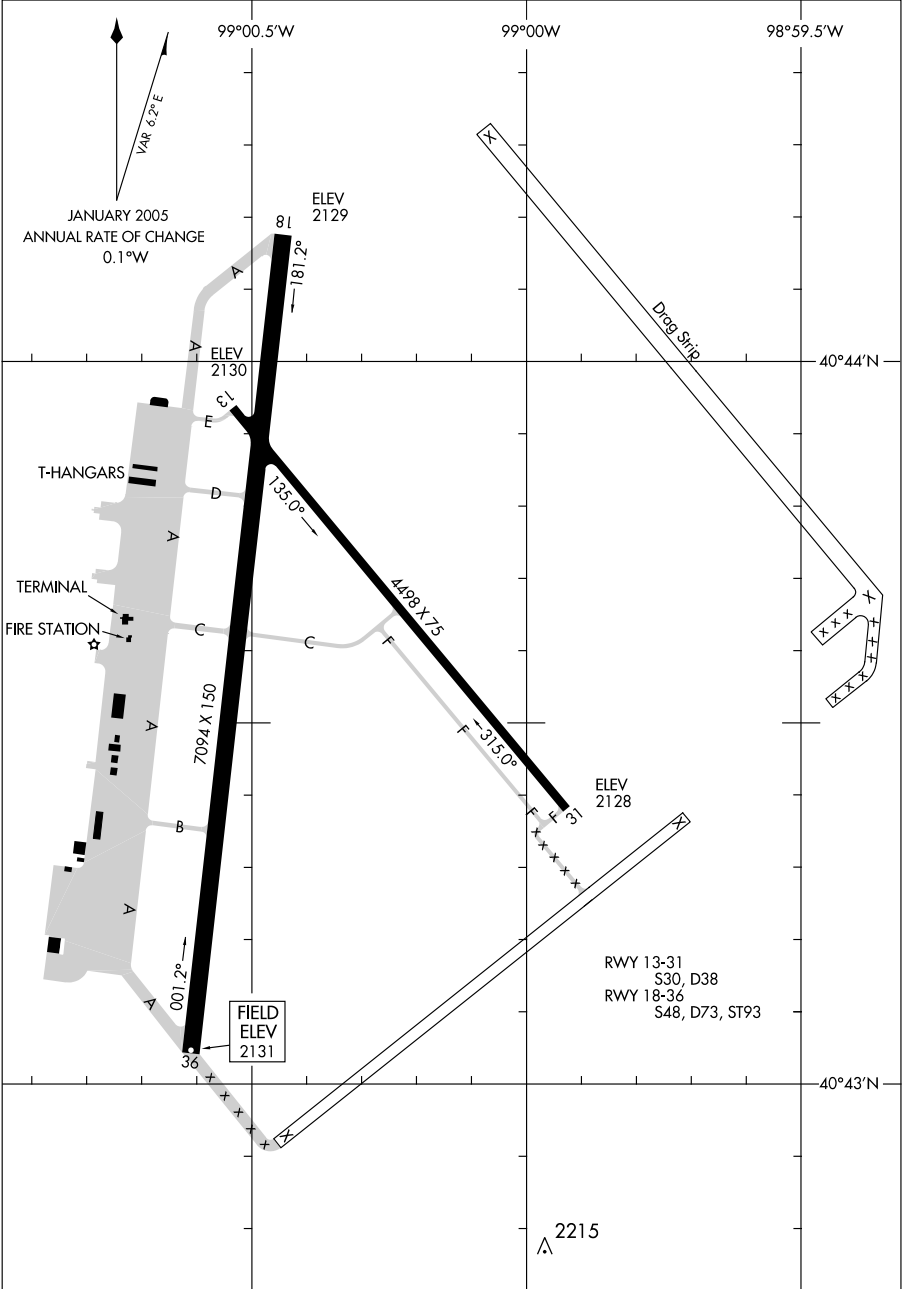


AIRPORT DIAGRAM

40°44'N-99°00'W

KEARNEY, NEBRASKA
KEARNEY RGNL (E.A.R)


07298

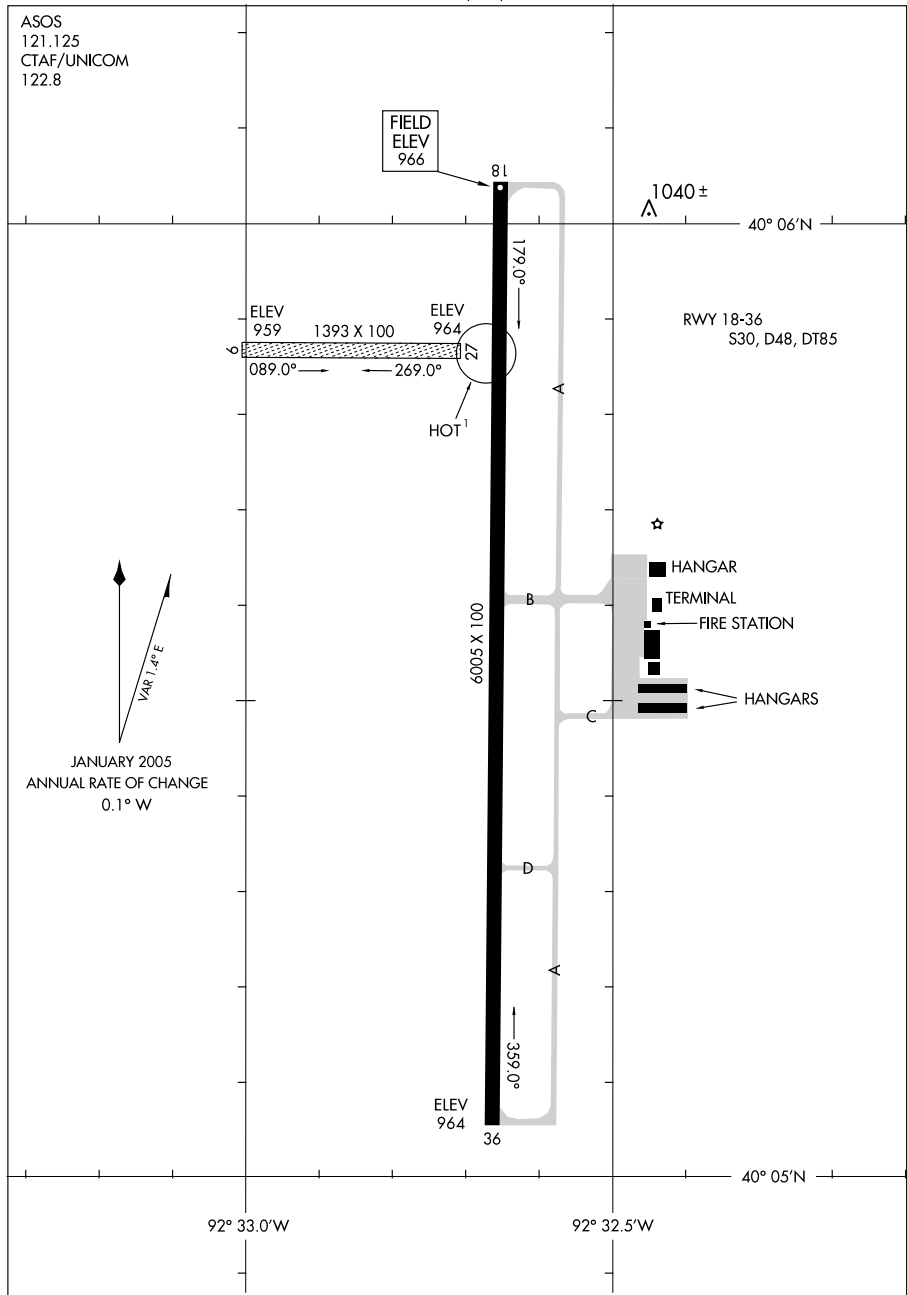

10098

AIRPORT DIAGRAM


AL-5481 (FAA)

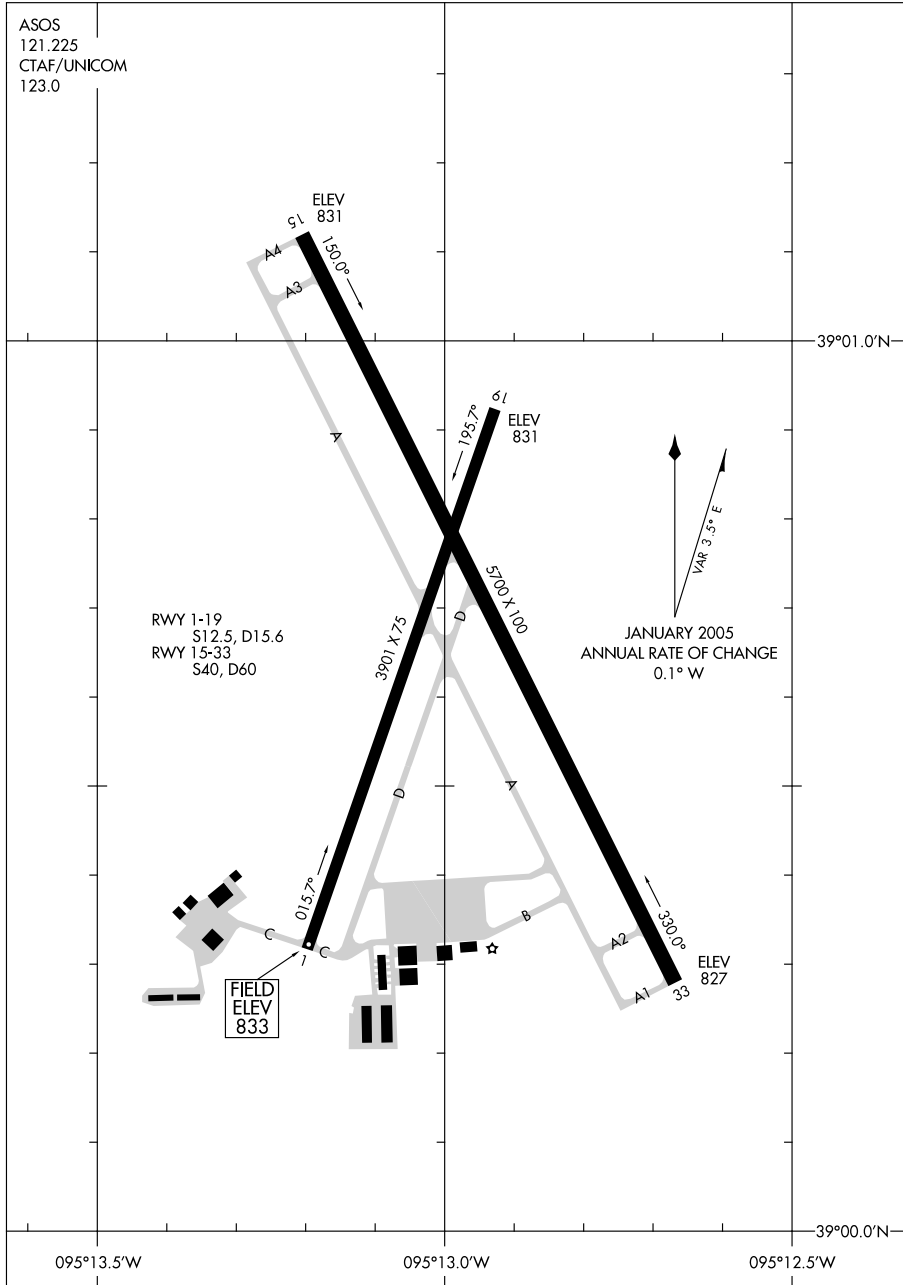LAWRENCE MUNI (LWC)
LAWRENCE, KANSASASOS
121.225
CTAF/UNICOM
123.0

AIRPORT DIAGRAM

10098

LAWRENCE, KANSAS
LAWRENCE MUNI (LWC)

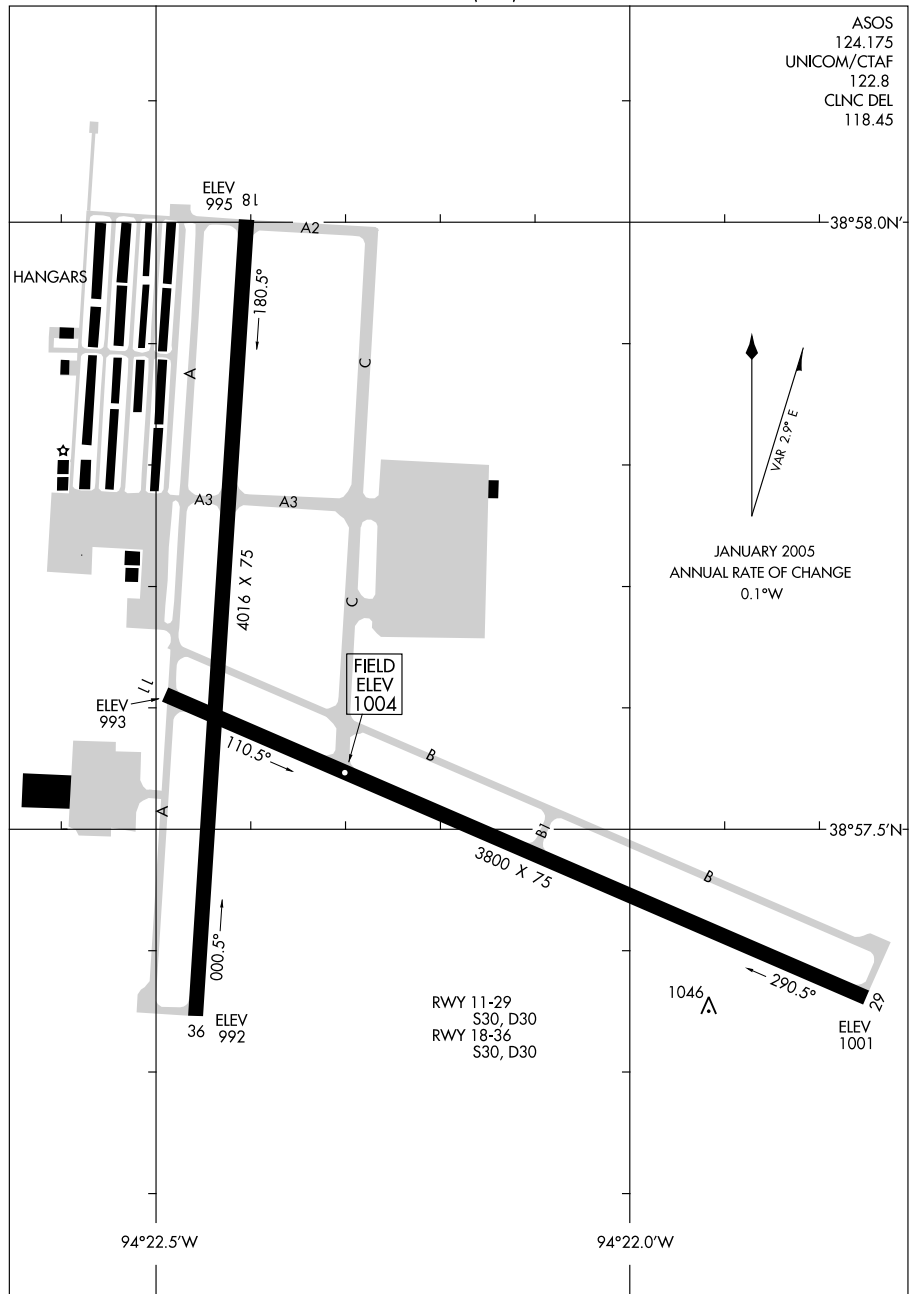


09351

AIRPORT DIAGRAM

AL-498 (FAA)

LIBERAL MID-AMERICA RGNL (LBL)
LIBERAL, KANSAS

AWOS-3
118.375
CTAF/UNICOM
122.8

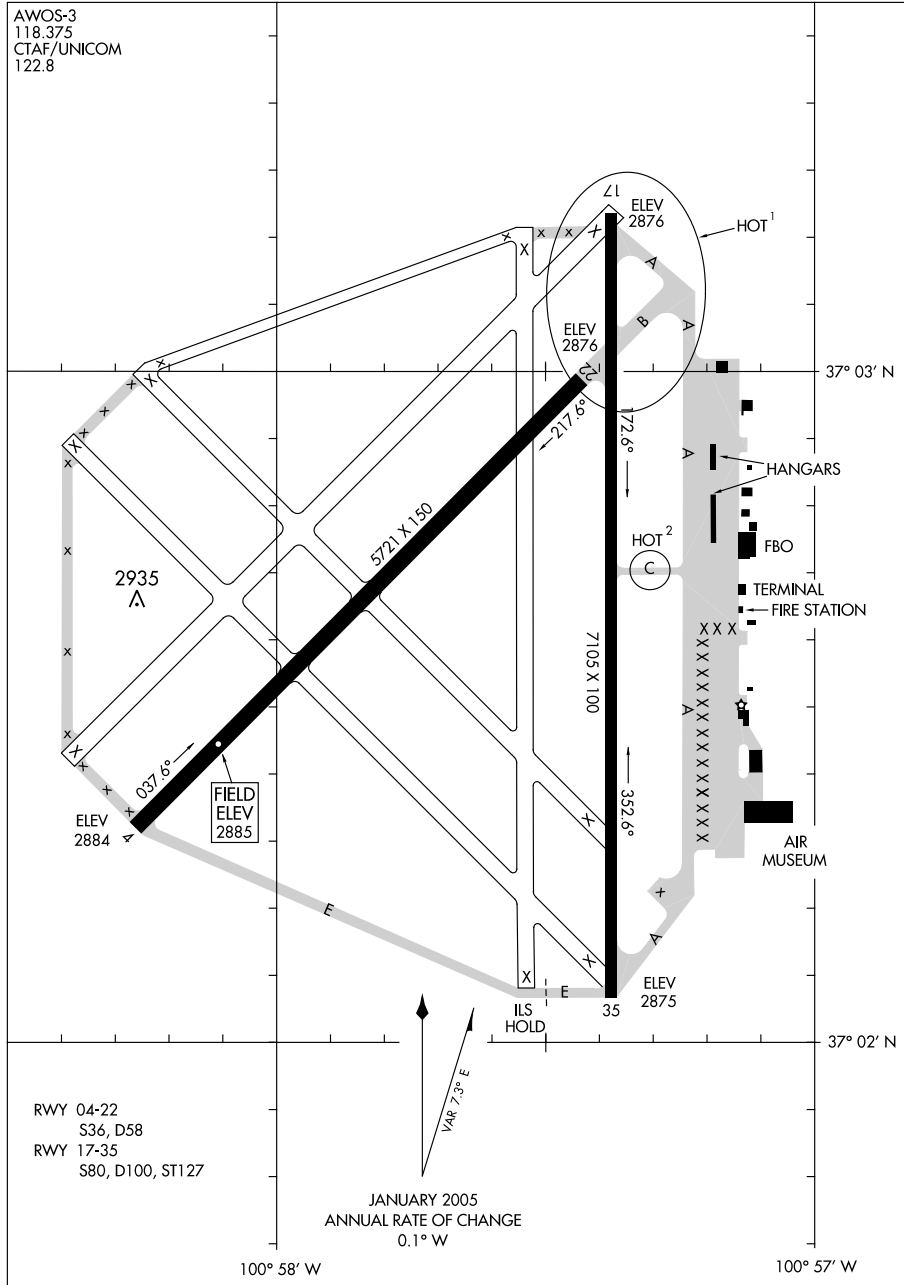

AIRPORT DIAGRAM


09351

LIBERAL, KANSAS
LIBERAL MID-AMERICA RGNL (LBL)

10154

AIRPORT DIAGRAM

AL-232 (FAA)

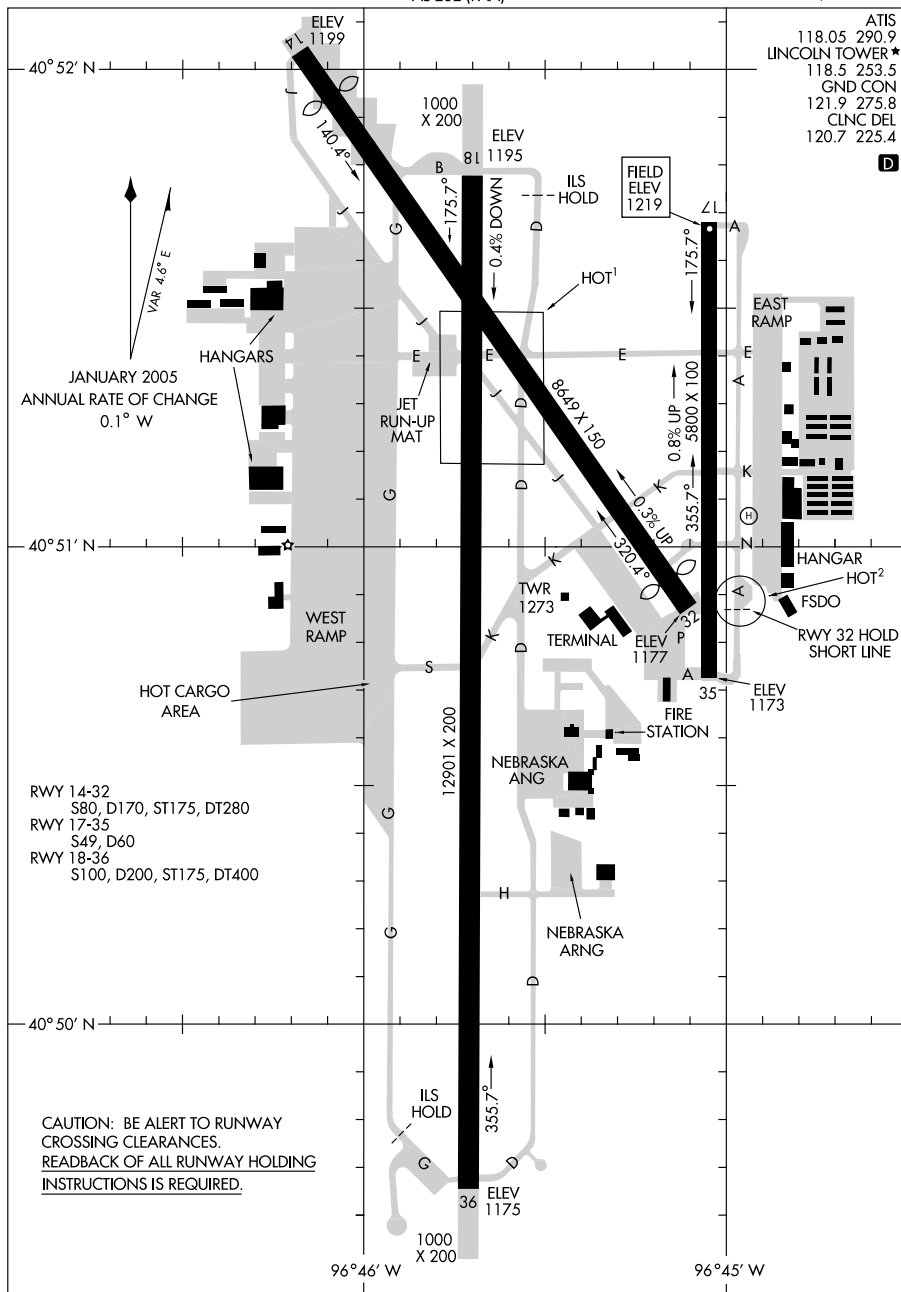LINCOLN (LNK)
LINCOLN, NEBRASKA

AIRPORT DIAGRAM


10154

LINCOLN, NEBRASKA
LINCOLN (LNK)

09351

AIRPORT DIAGRAM

AL-5241 (FAA)

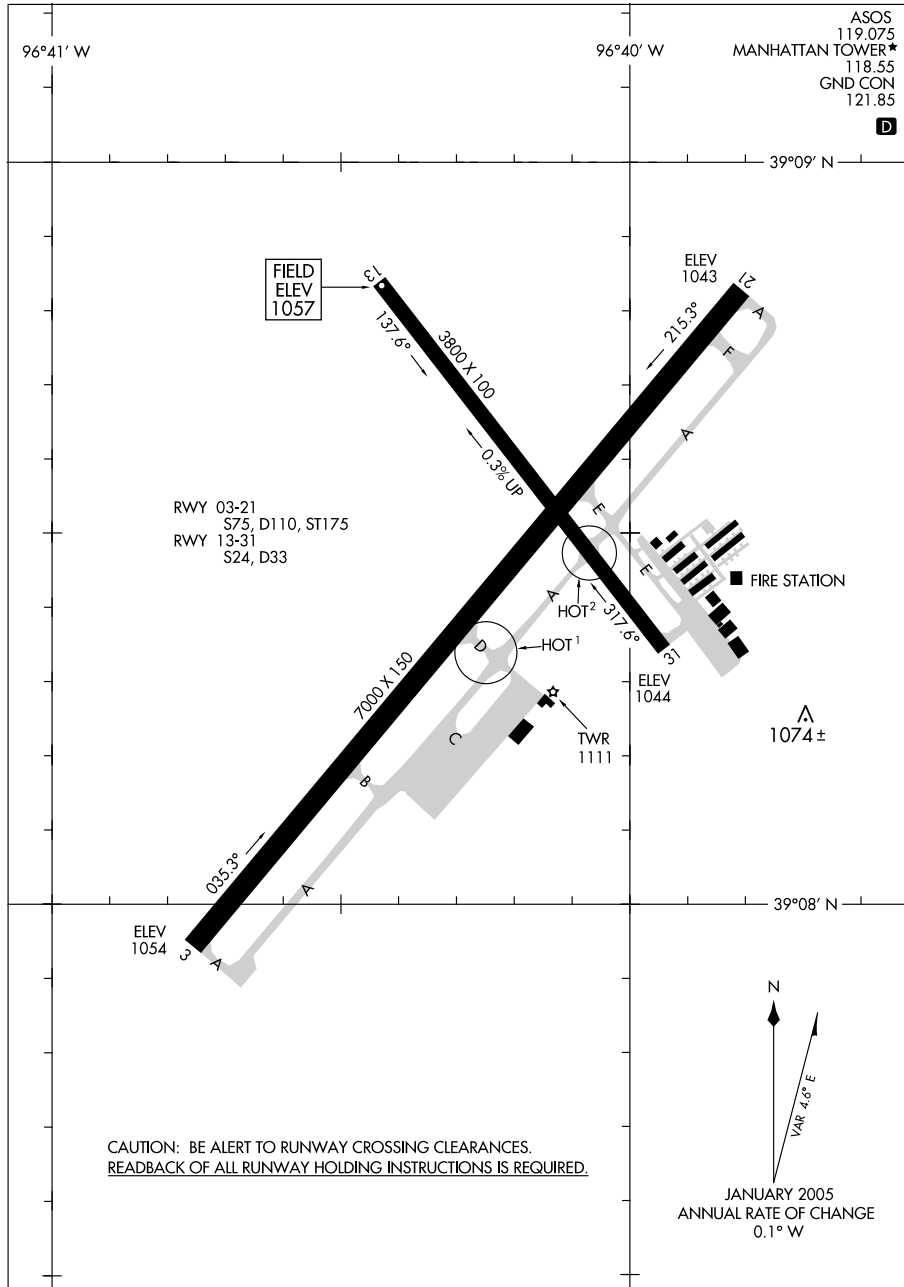MANHATTAN RGNL (MHK)
MANHATTAN, KANSAS

AIRPORT DIAGRAM

09351

MANHATTAN, KANSAS
MANHATTAN RGNL (MHK)


09071

AIRPORT DIAGRAM

AL-6585 (FAA)

MAPLE LAKE MUNI (MGG)
MAPLE LAKE, MINNESOTA

AWOS-3
128.325
CTAF/UNICOM
122.8

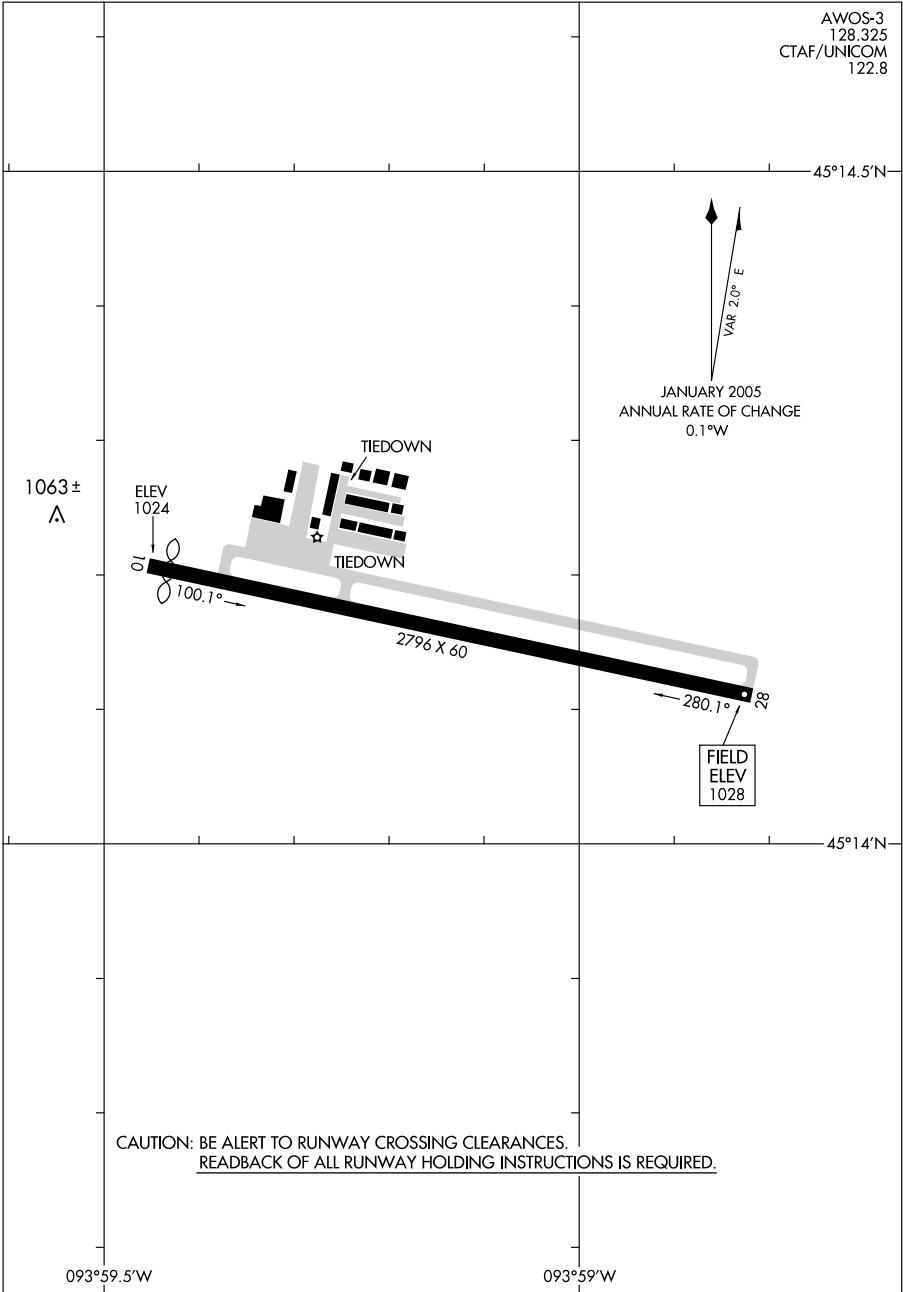

AIRPORT DIAGRAM


09071

MAPLE LAKE, MINNESOTA
MAPLE LAKE MUNI (MGG)

09295
AIRPORT DIAGRAM

AL-667 (FAA)

MASON CITY MUNI (MCW)
MASON CITY, IOWA

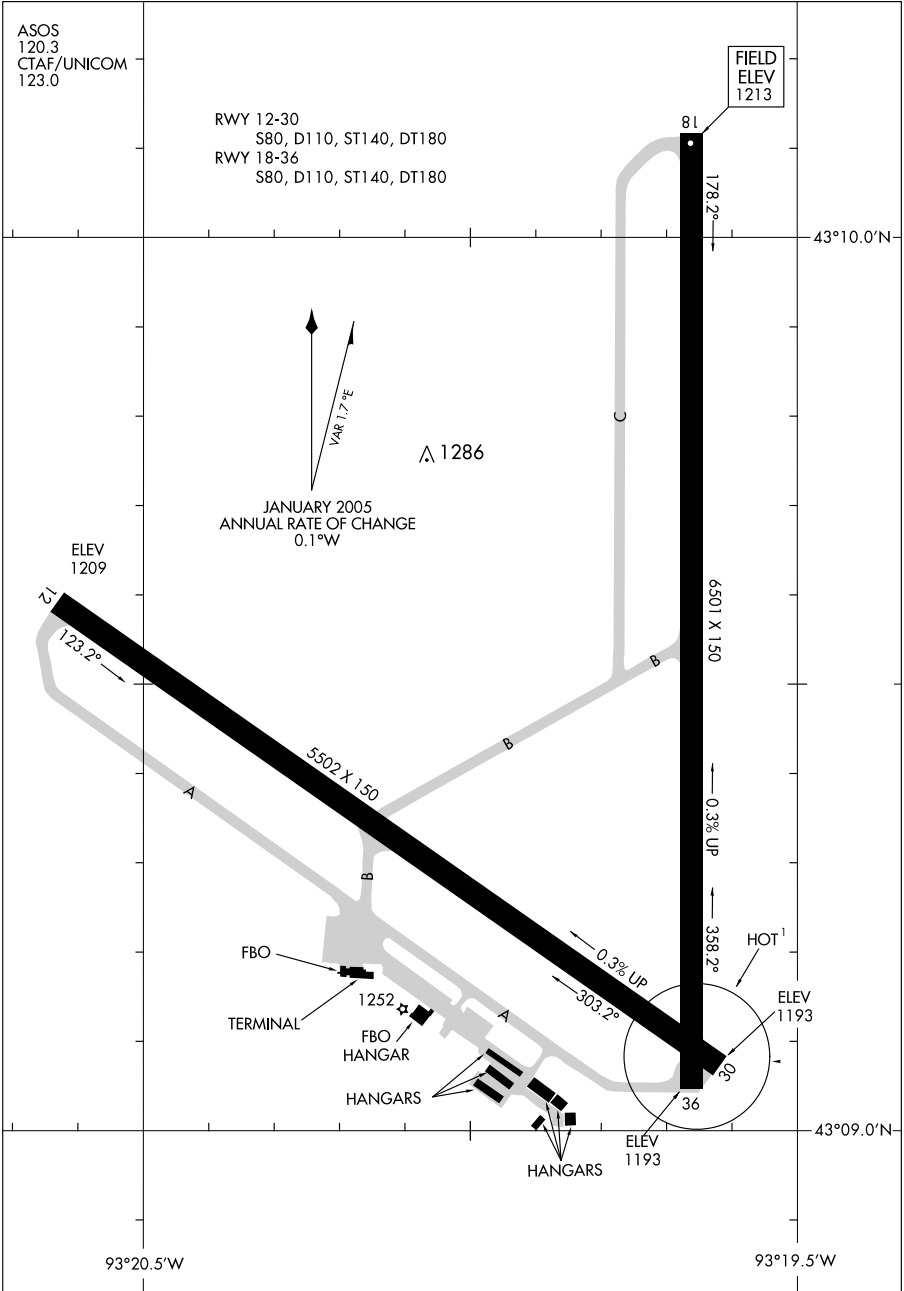

AIRPORT DIAGRAM
09295

MASON CITY, IOWA
MASON CITY MUNI (MCW)


09351

AIRPORT DIAGRAM

AL-5301 (FAA)

MC COOK BEN NELSON RGNL (MCK)

MC COOK, NEBRASKA

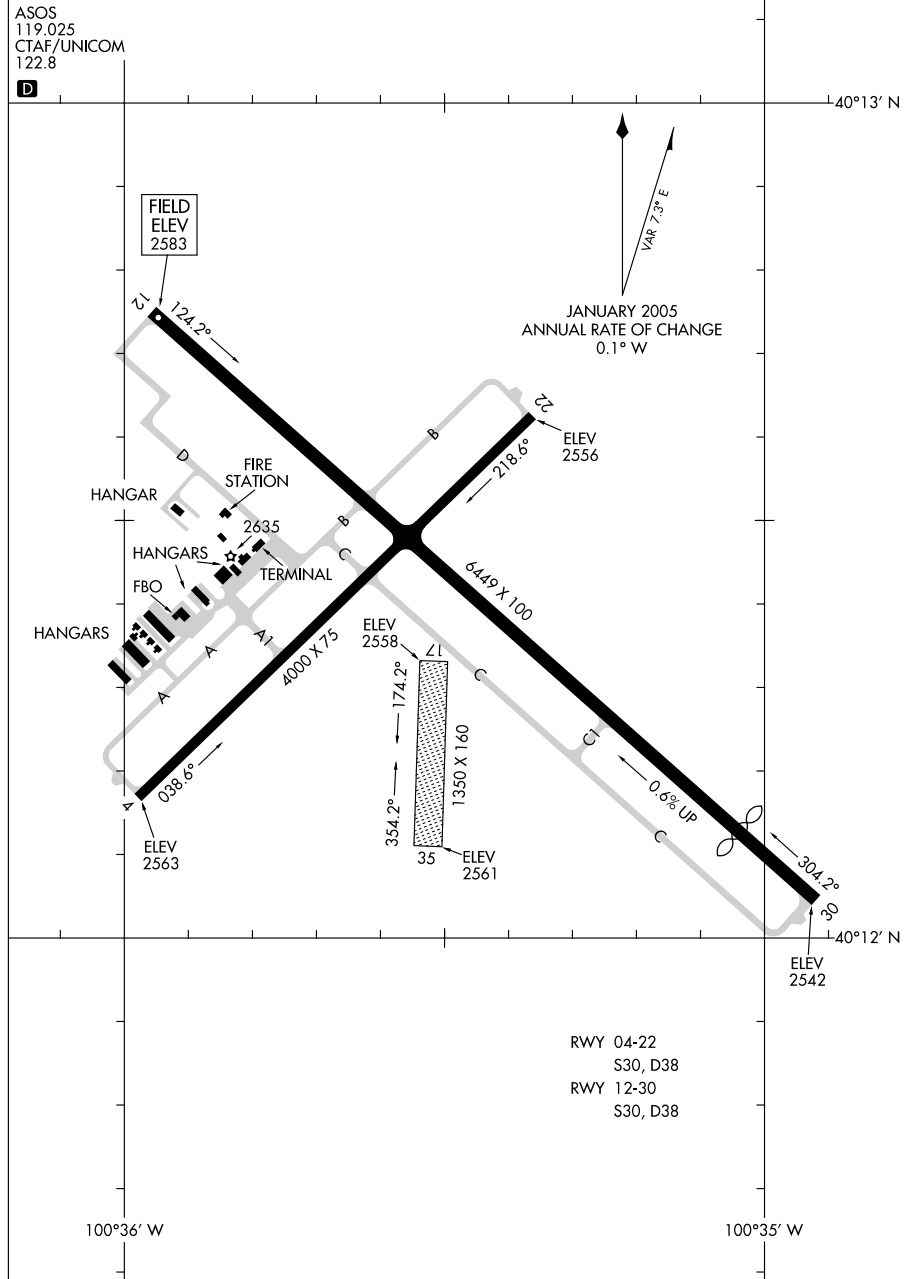

AIRPORT DIAGRAM


09351

MC COOK, NEBRASKA
MC COOK BEN NELSON RGNL (MCK)

09127

AIRPORT DIAGRAM

AL-5158 (FAA)

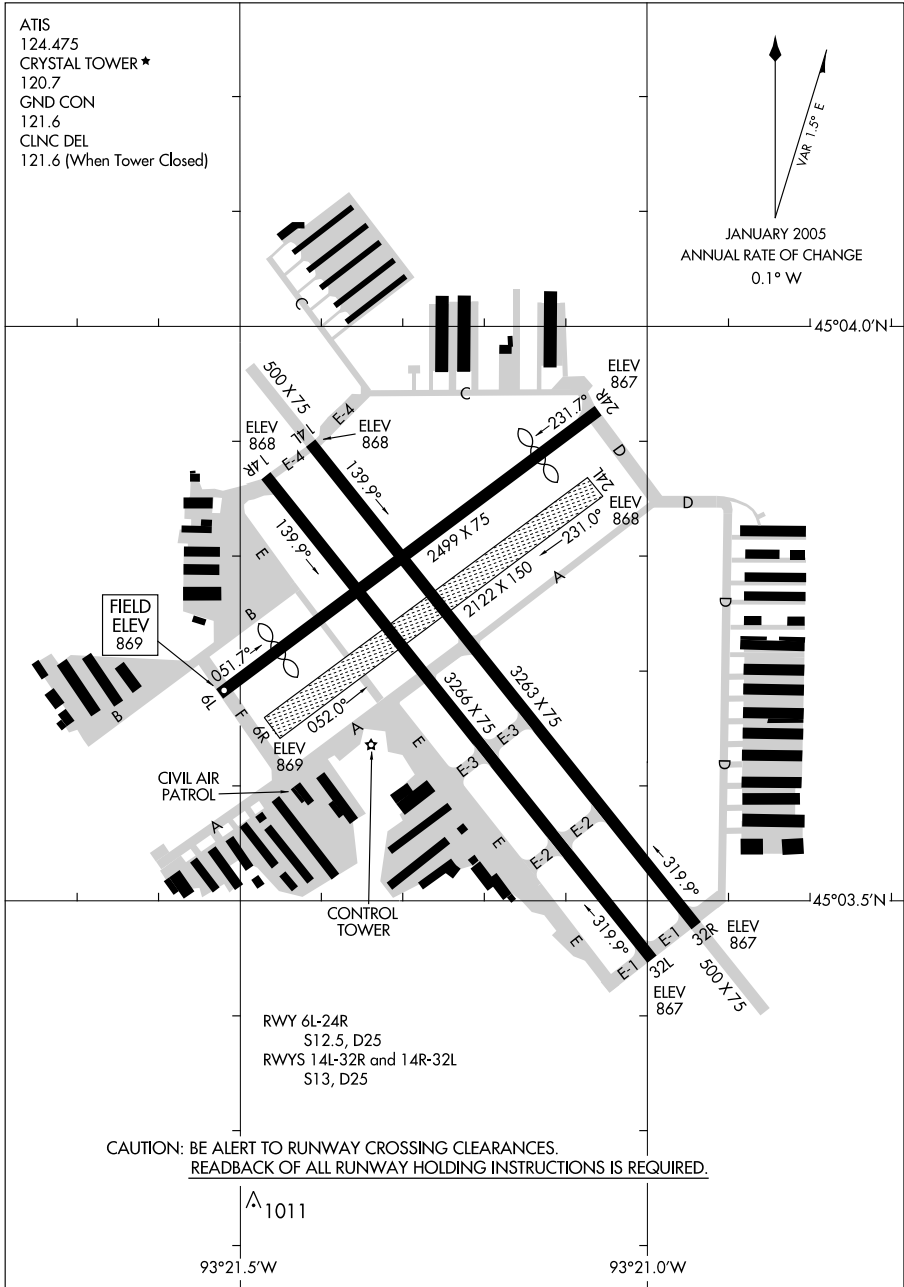MINNEAPOLIS/CRYSTAL (MIC)
MINNEAPOLIS, MINNESOTA

AIRPORT DIAGRAM


09127

MINNEAPOLIS, MINNESOTA
MINNEAPOLIS/CRYSTAL (MIC)

10098

AIRPORT DIAGRAM

AL-5094 (FAA)

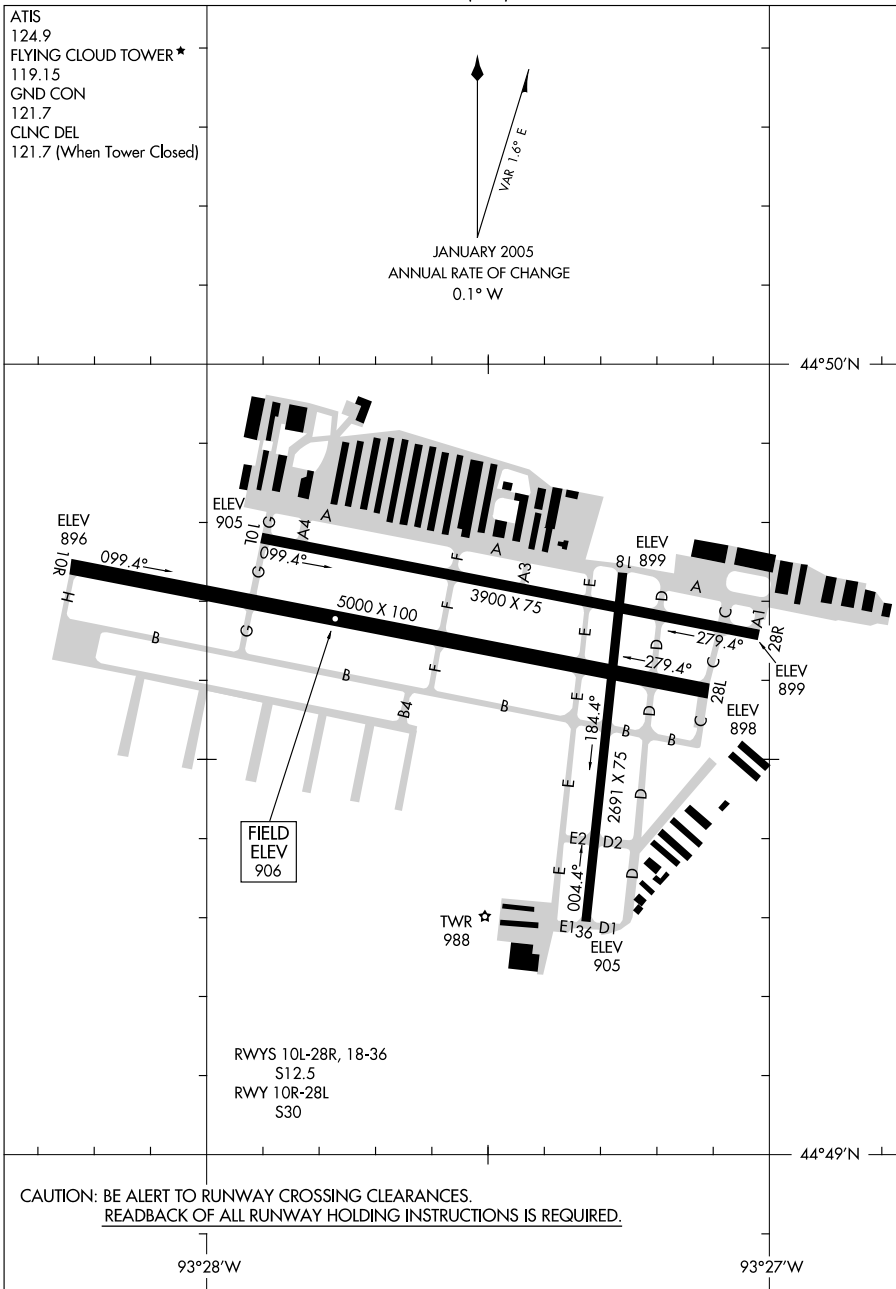MINNEAPOLIS/ FLYING CLOUD (F'CM)
MINNEAPOLIS, MINNESOTA

AIRPORT DIAGRAM

10098

MINNEAPOLIS, MINNESOTA
MINNEAPOLIS/ FLYING CLOUD (F'CM)


10098

AIRPORT DIAGRAM

MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

AL-264 (FAA)

MINNEAPOLIS, MINNESOTA

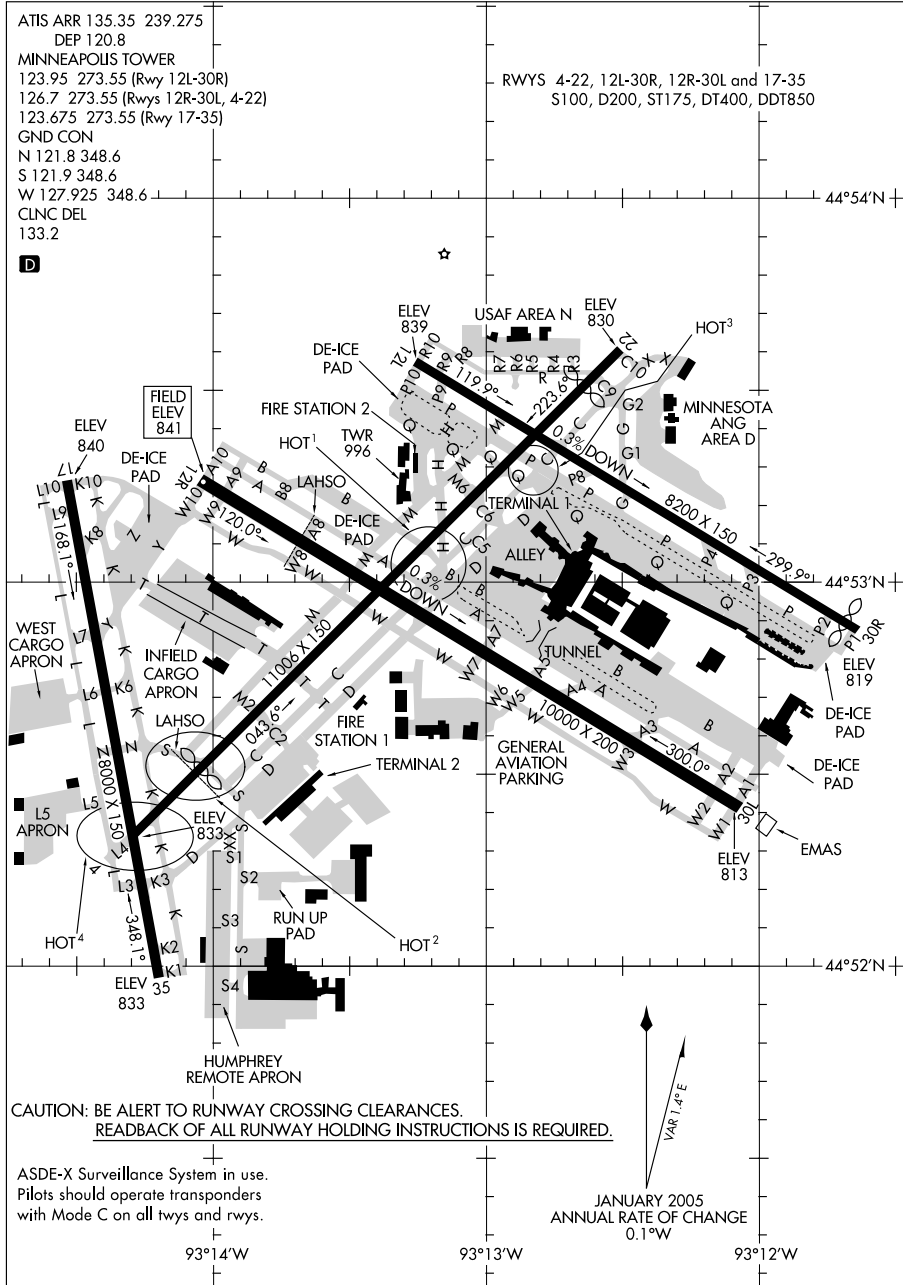

AIRPORT DIAGRAM

10098

MINNEAPOLIS, MINNESOTA
MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)


07186

AIRPORT DIAGRAM

AFD-5013 [USAF]

MINOT AFB (KMIB)

MINOT, NORTH DAKOTA

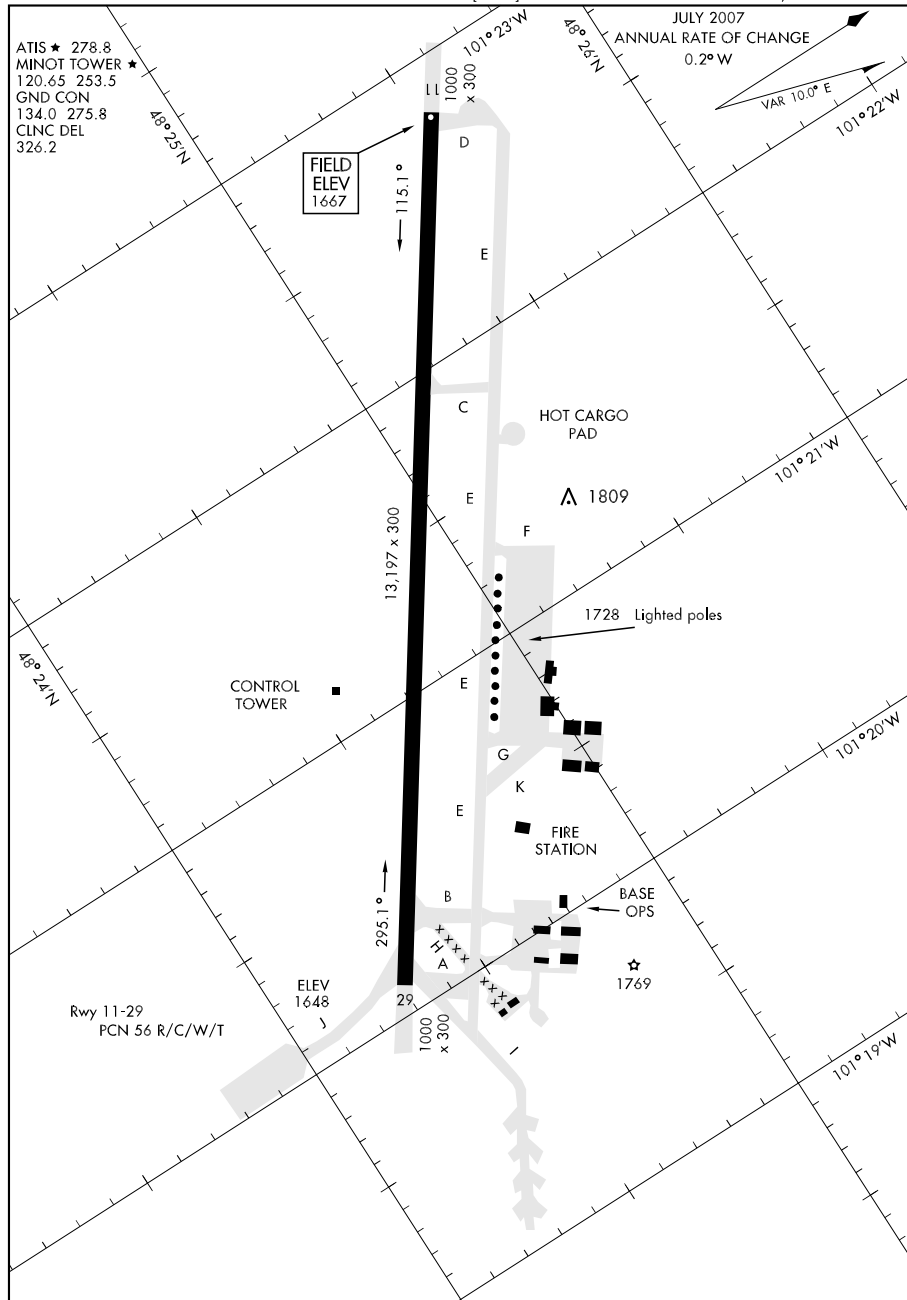

AIRPORT DIAGRAM


MINOT, NORTH DAKOTA

MINOT AFB (KMIB)

09015

AIRPORT DIAGRAM

AL-635 (FAA)

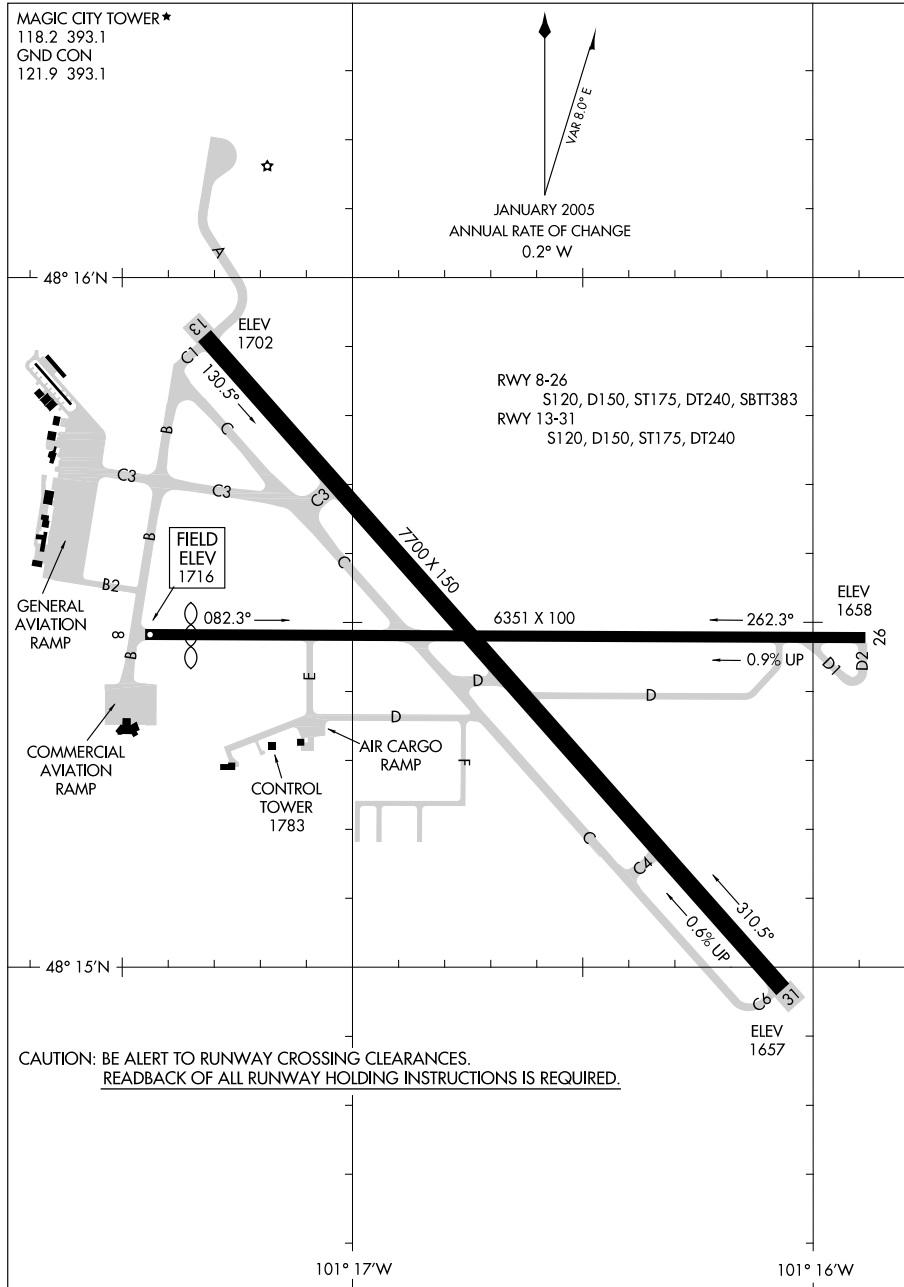MINOT INTL (MOT)
MINOT, NORTH DAKOTA


AIRPORT DIAGRAM

09015

MINOT, NORTH DAKOTA
MINOT INTL (MOT)

09295

AIRPORT DIAGRAM

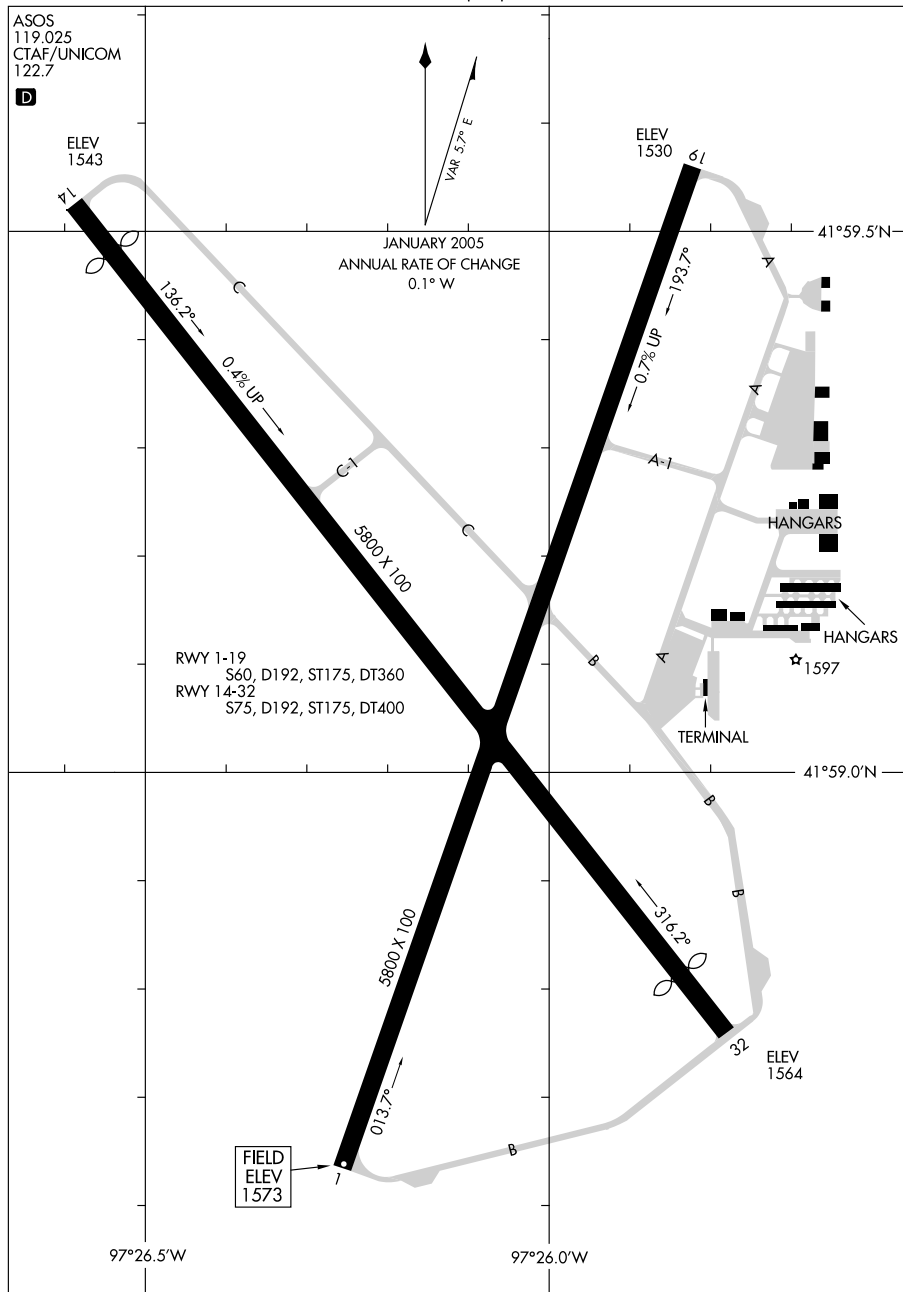NORFOLK/KARL STEFAN MEMORIAL (OFK)
NORFOLK, NEBRASKA

AIRPORT DIAGRAM


09295

NORFOLK, NEBRASKA
NORFOLK/KARL STEFAN MEMORIAL (OFK)

09295

AIRPORT DIAGRAM

NORTH PLATTE RGNL AIRPORT LEE BIRD FIELD (LBF)
AL-292 (FAA) NORTH PLATTE, NEBRASKA

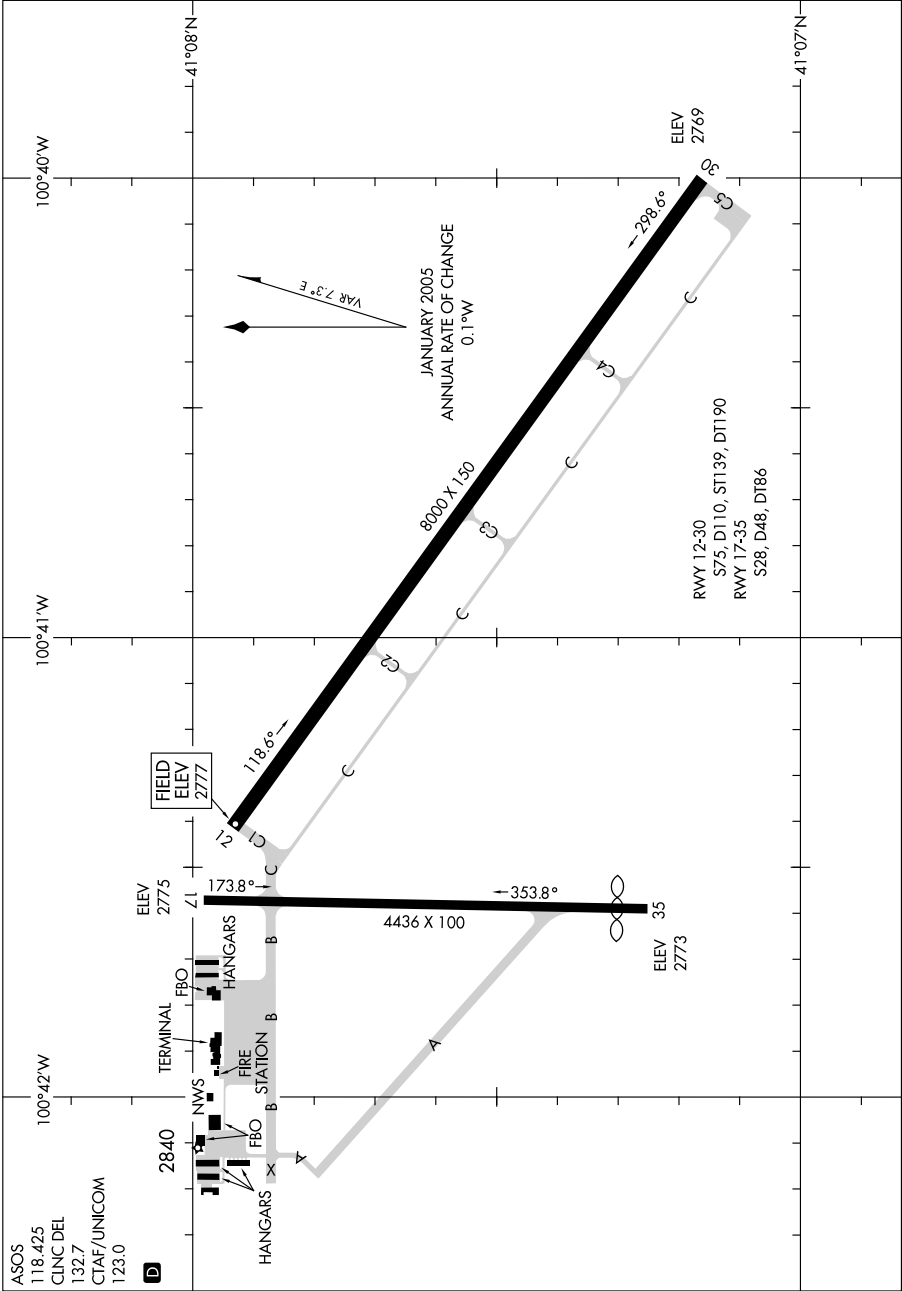

AIRPORT DIAGRAM

09295

NORTH PLATTE, NEBRASKA
NORTH PLATTE RGNL AIRPORT LEE BIRD FIELD (LBF)


10154

AIRPORT DIAGRAM

AFD-544 [USAF]

OFFUTT AFB (KOFF)

OMAHA, NEBRASKA

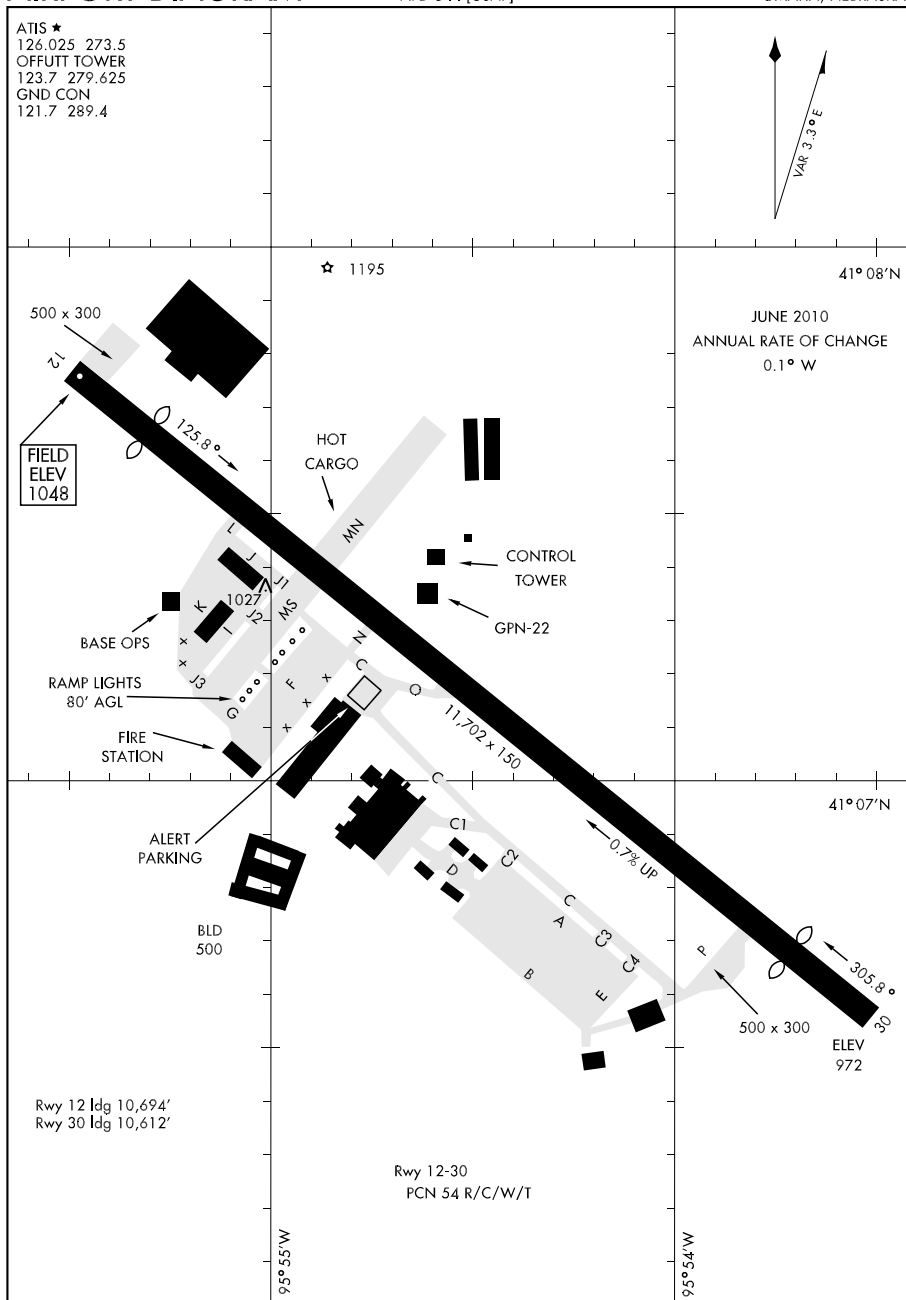

AIRPORT DIAGRAM

OMAHA, NEBRASKA


OFFUTT AFB (KOFF)

10154

AIRPORT DIAGRAM

OLATHE/JOHNSON COUNTY EXECUTIVE (OJC)
OLATHE, KANSAS

AL-5687 (FAA)

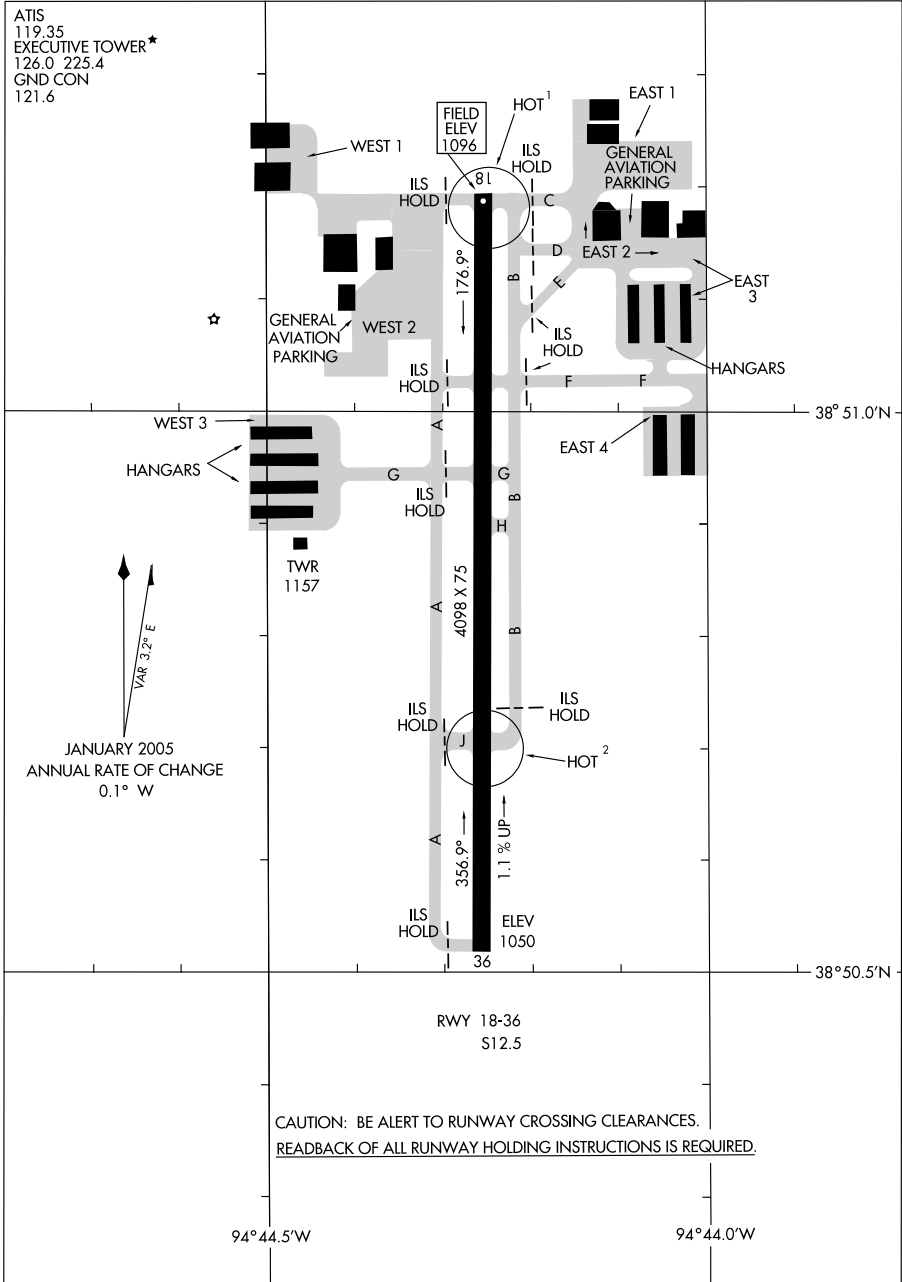

AIRPORT DIAGRAM

10154

OLATHE, KANSAS
OLATHE/JOHNSON COUNTY EXECUTIVE (OJC)


10042

AIRPORT DIAGRAM

AL-304 (FAA)

OMAHA/EPPLEY AIRFIELD (OMA)

OMAHA, NEBRASKA

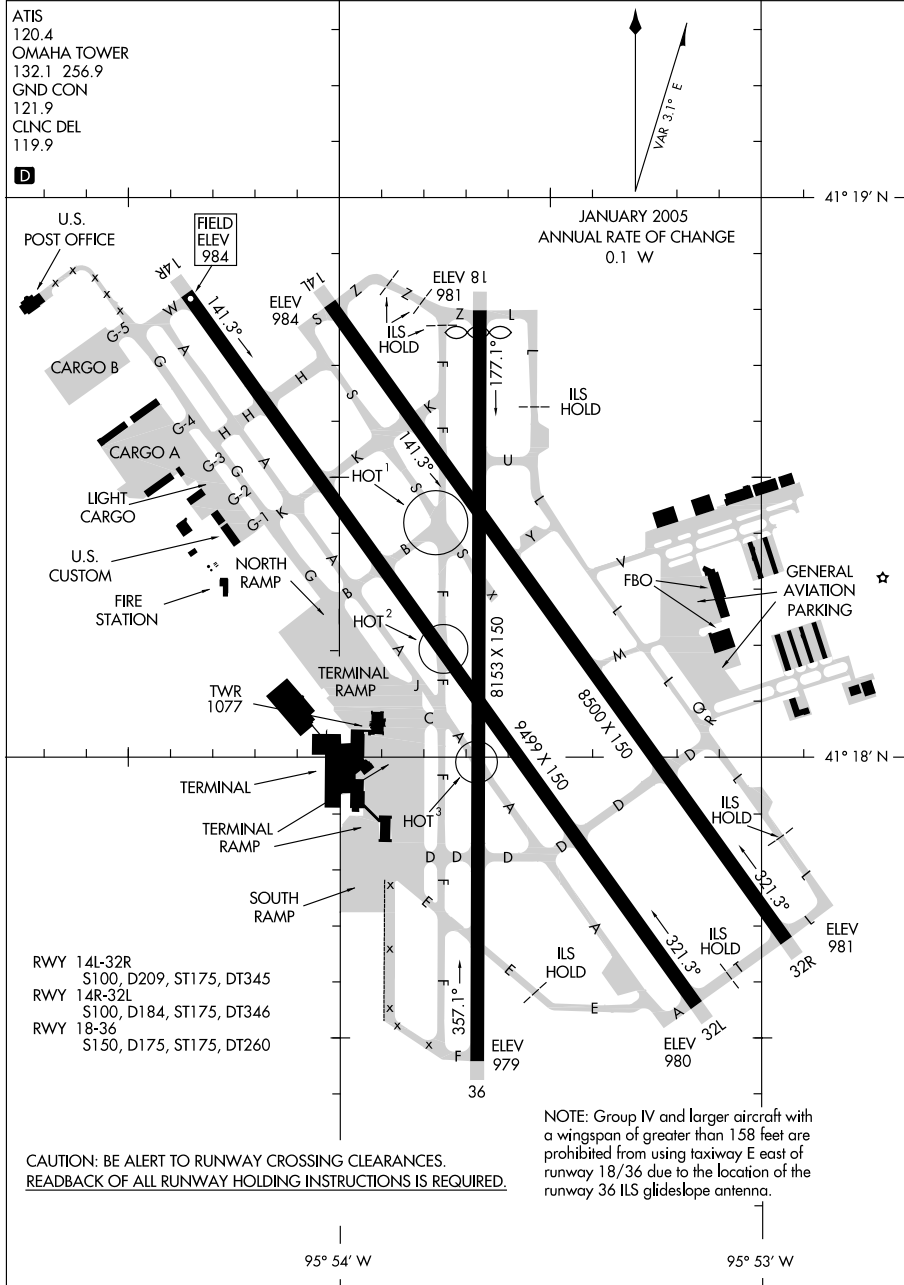

AIRPORT DIAGRAM


10042

OMAHA, NEBRASKA
OMAHA/EPPLEY AIRFIELD (OMA)

09071

AIRPORT DIAGRAM

AL-915 (FAA)

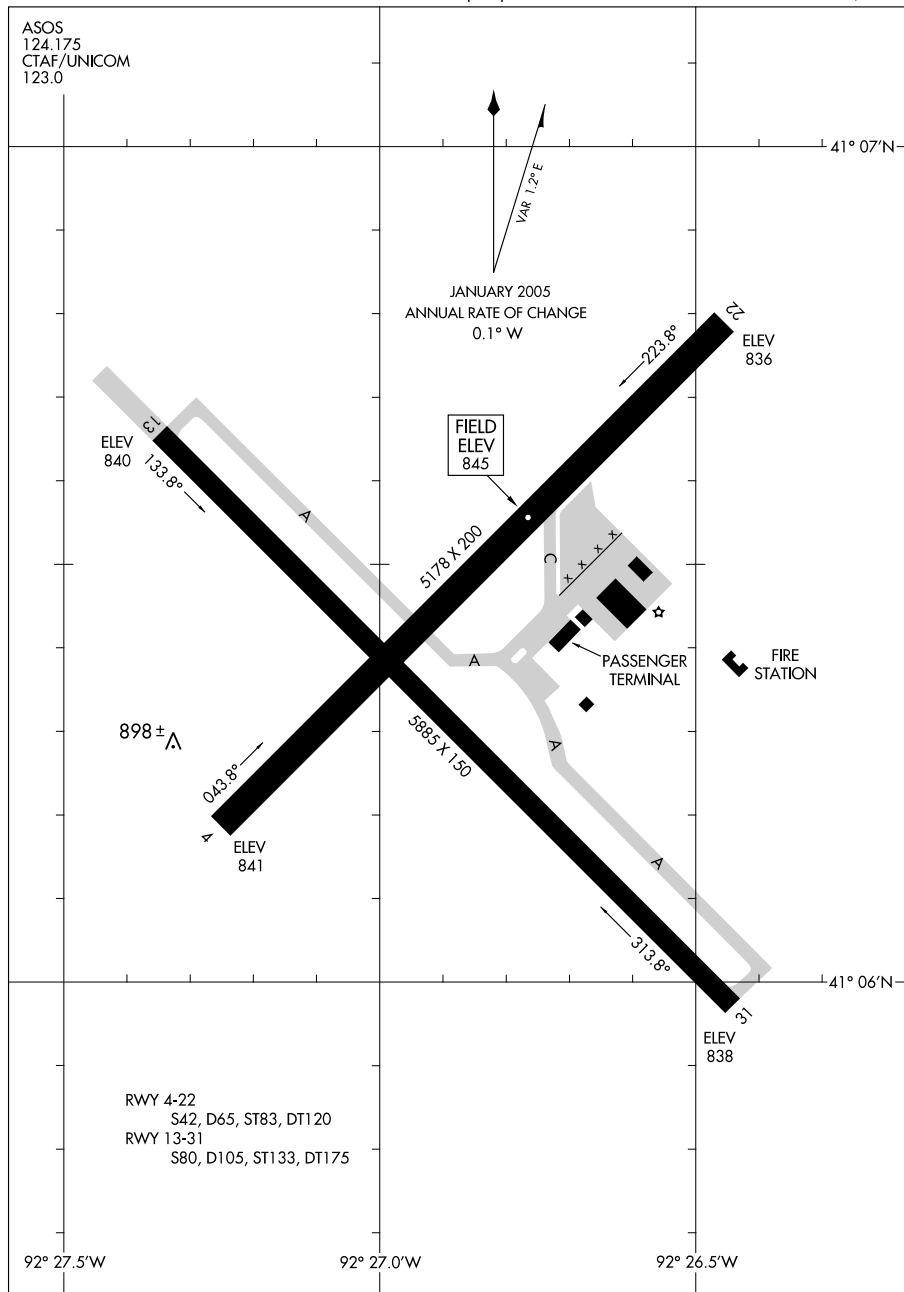OTTUMWA RGNL (OTM)
OTTUMWA, IOWA

AIRPORT DIAGRAM


09071

OTTUMWA, IOWA
OTTUMWA RGNL (OTM)

09295

AIRPORT DIAGRAM

RAPID CITY RGNL (RAP)
RAPID CITY, SOUTH DAKOTA

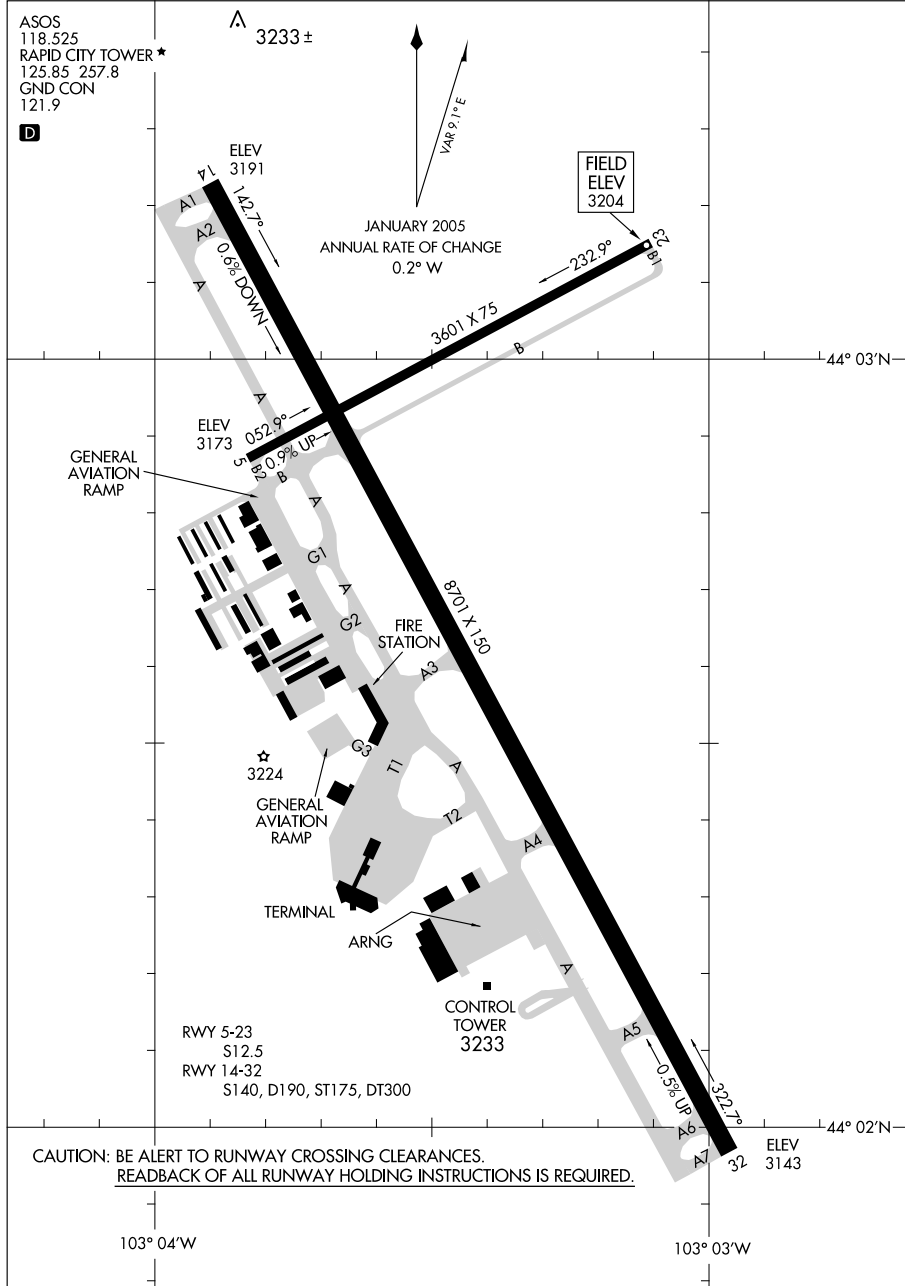

AIRPORT DIAGRAM


09295

RAPID CITY, SOUTH DAKOTA
RAPID CITY RGNL (RAP)

09295

AIRPORT DIAGRAM

AL-5041 (FAA)

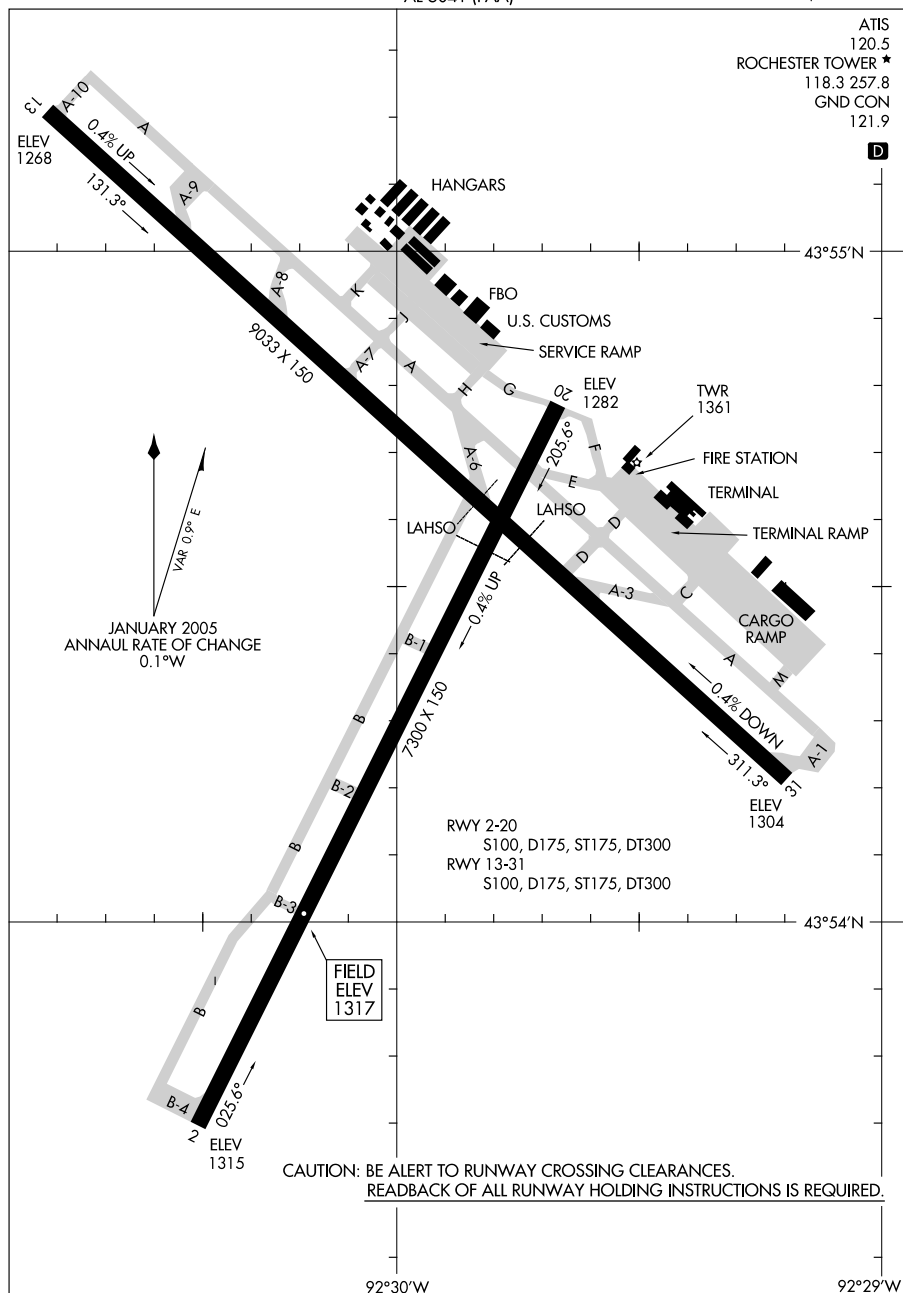ROCHESTER INTL (RST)
ROCHESTER, MINNESOTA

AIRPORT DIAGRAM


09295

ROCHESTER, MINNESOTA
ROCHESTER INTL (RST)

10042

AIRPORT DIAGRAM

AL-5799 (FAA)

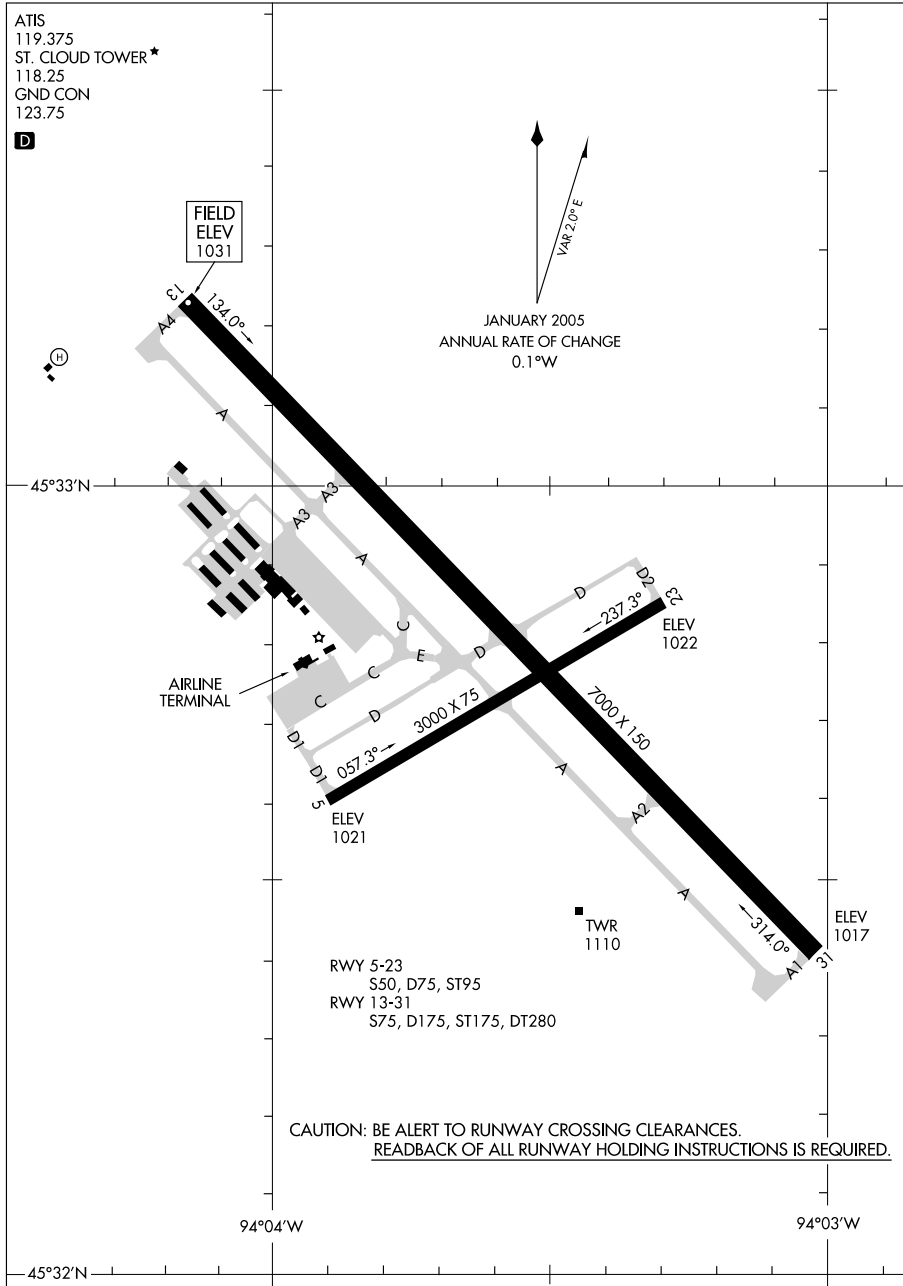ST. CLOUD RGNL (STC)
ST. CLOUD, MINNESOTA

AIRPORT DIAGRAM

10042


ST. CLOUD, MINNESOTA
ST. CLOUD RGNL (STC)

09351

AIRPORT DIAGRAM

ST. LOUIS/LAMBERT-ST. LOUIS INTL (STL)

ST. LOUIS, MISSOURI

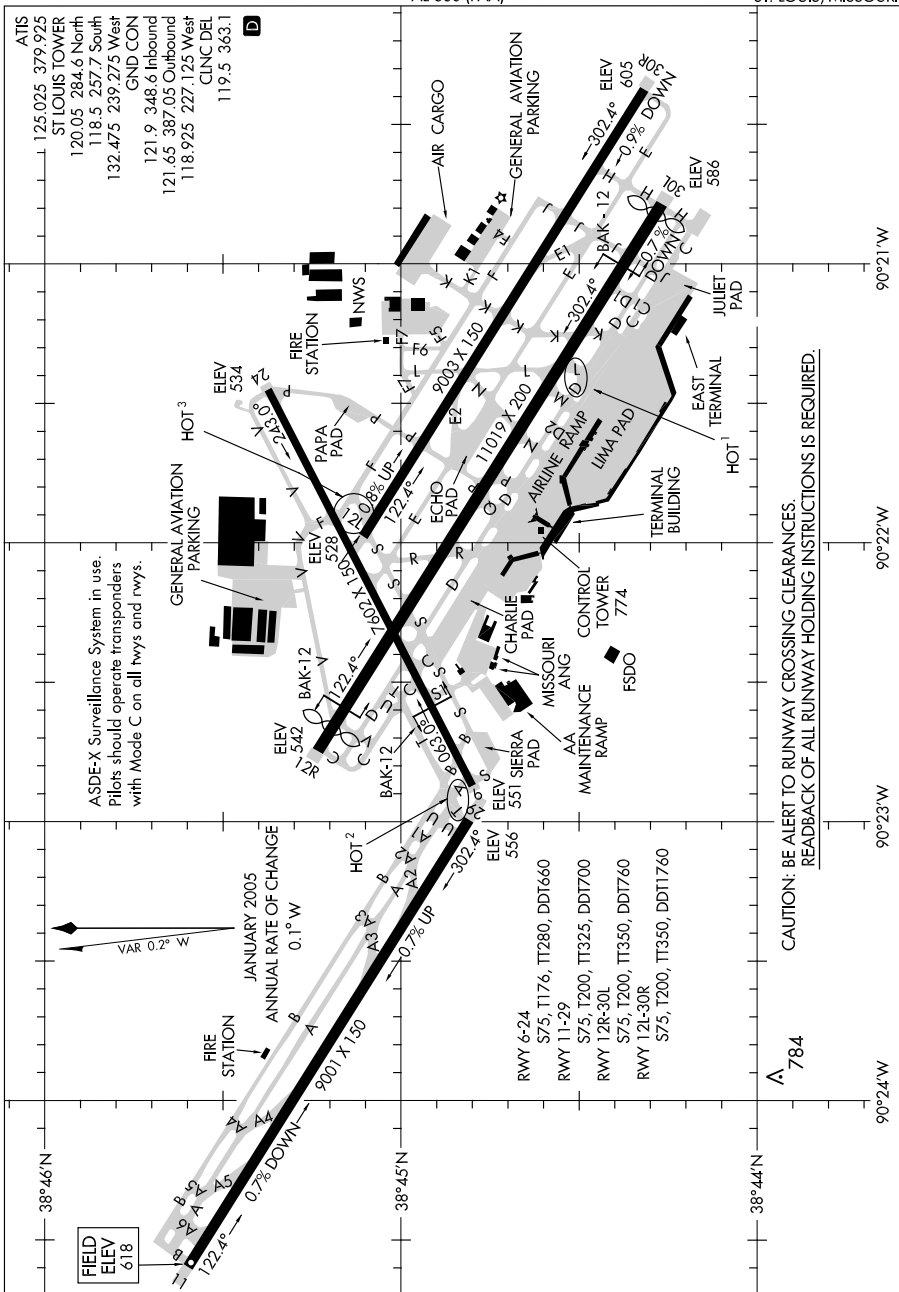

AIRPORT DIAGRAM


ST. LOUIS, MISSOURI
ST. LOUIS/LAMBERT-ST. LOUIS INTL (STL)

09351

10042
AIRPORT DIAGRAM

AL-5400 (FAA)

ST. LOUIS/ SPIRIT OF ST. LOUIS (STL)
ST. LOUIS, MISSOURI

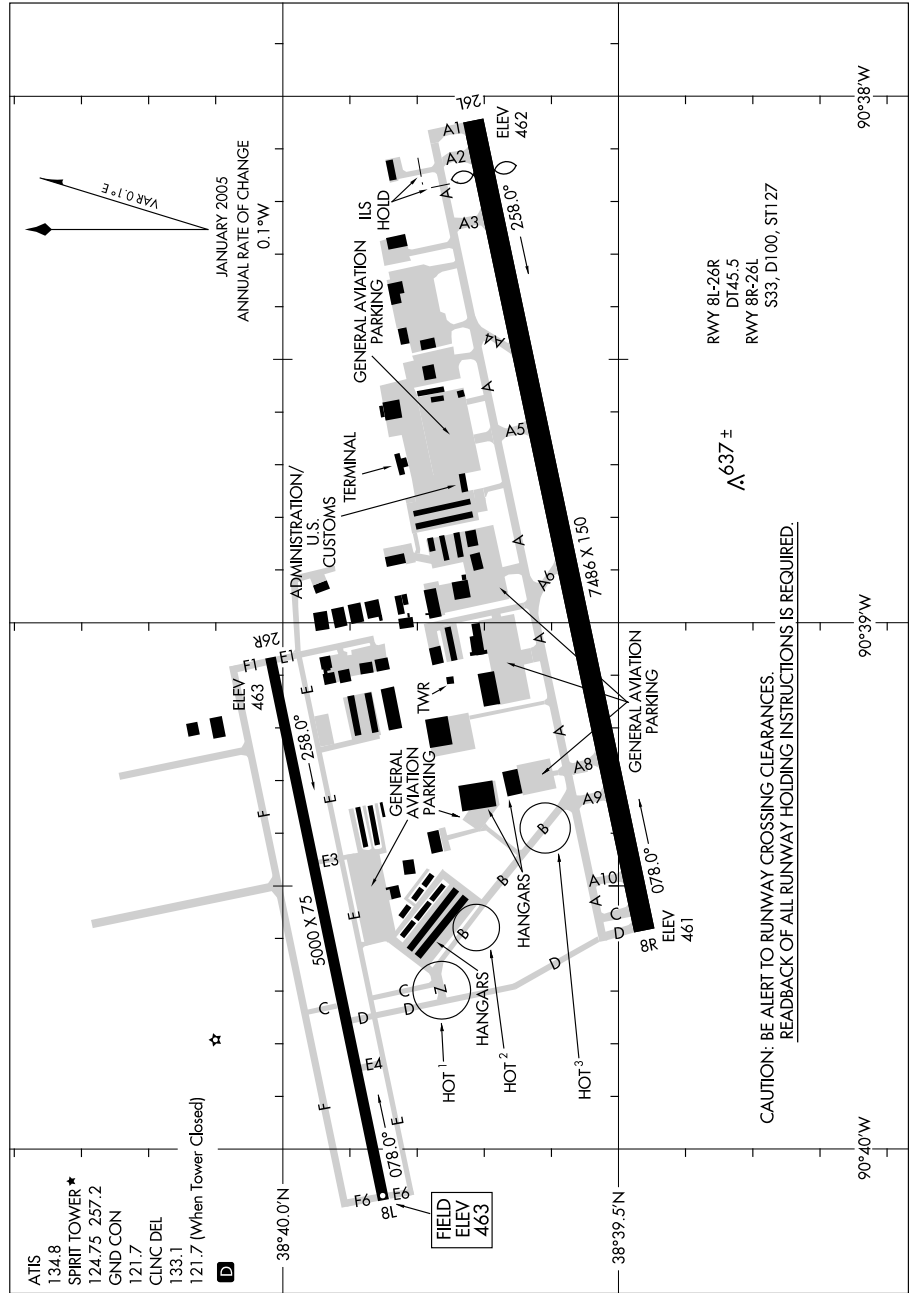

AIRPORT DIAGRAM
10042

ST. LOUIS, MISSOURI
ST. LOUIS/ SPIRIT OF ST. LOUIS (STL)


10042

AIRPORT DIAGRAM

ST. PAUL DOWNTOWN HOLMAN FIELD (STP)

AL-263 (FAA)

ST. PAUL, MINNESOTA

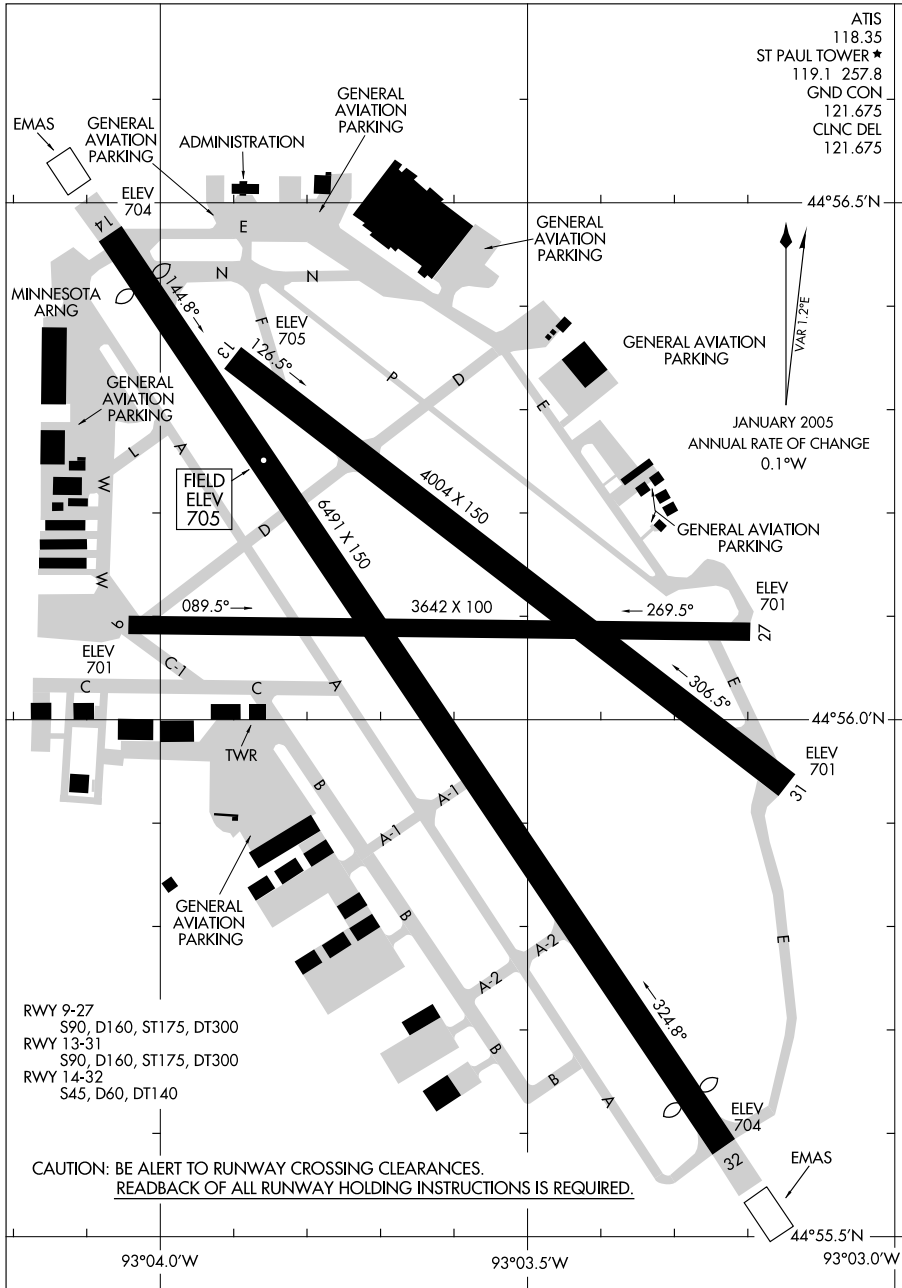

AIRPORT DIAGRAM

10042

ST. PAUL, MINNESOTA
ST. PAUL DOWNTOWN HOLMAN FIELD (STP)


09239

AIRPORT DIAGRAM

AL-362 (FAA)

SALINA MUNI (SLN)

SALINA, KANSAS

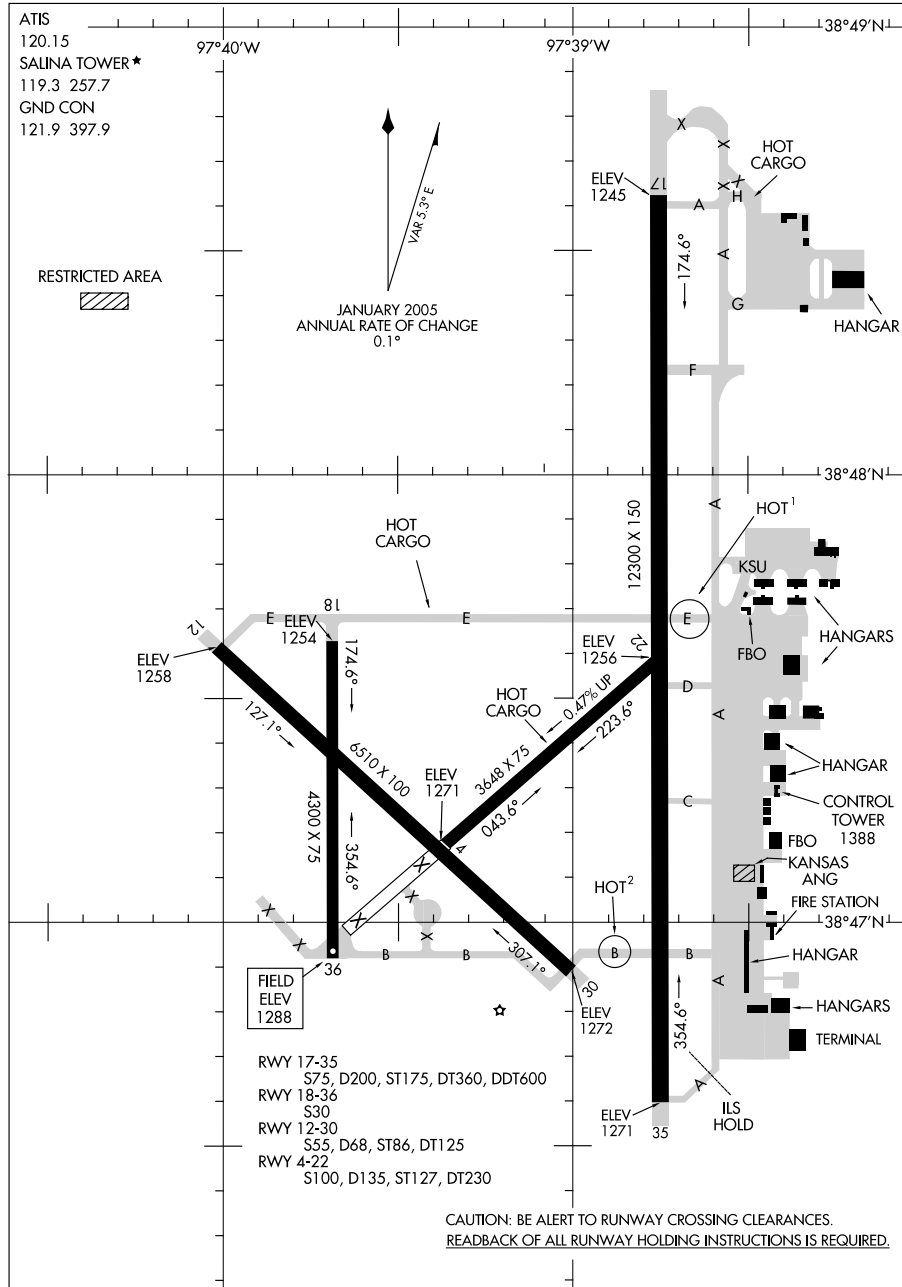

AIRPORT DIAGRAM

09239


SALINA, KANSAS

SALINA MUNI (SLN)

07298

AIRPORT DIAGRAM

WESTERN NEBRASKA RGNL/WILLIAM B. HEILIG FIELD (B'F'F)
SCOTTSBLUFF/ AL-383 (FAA) SCOTTSBLUFF, NEBRASKA

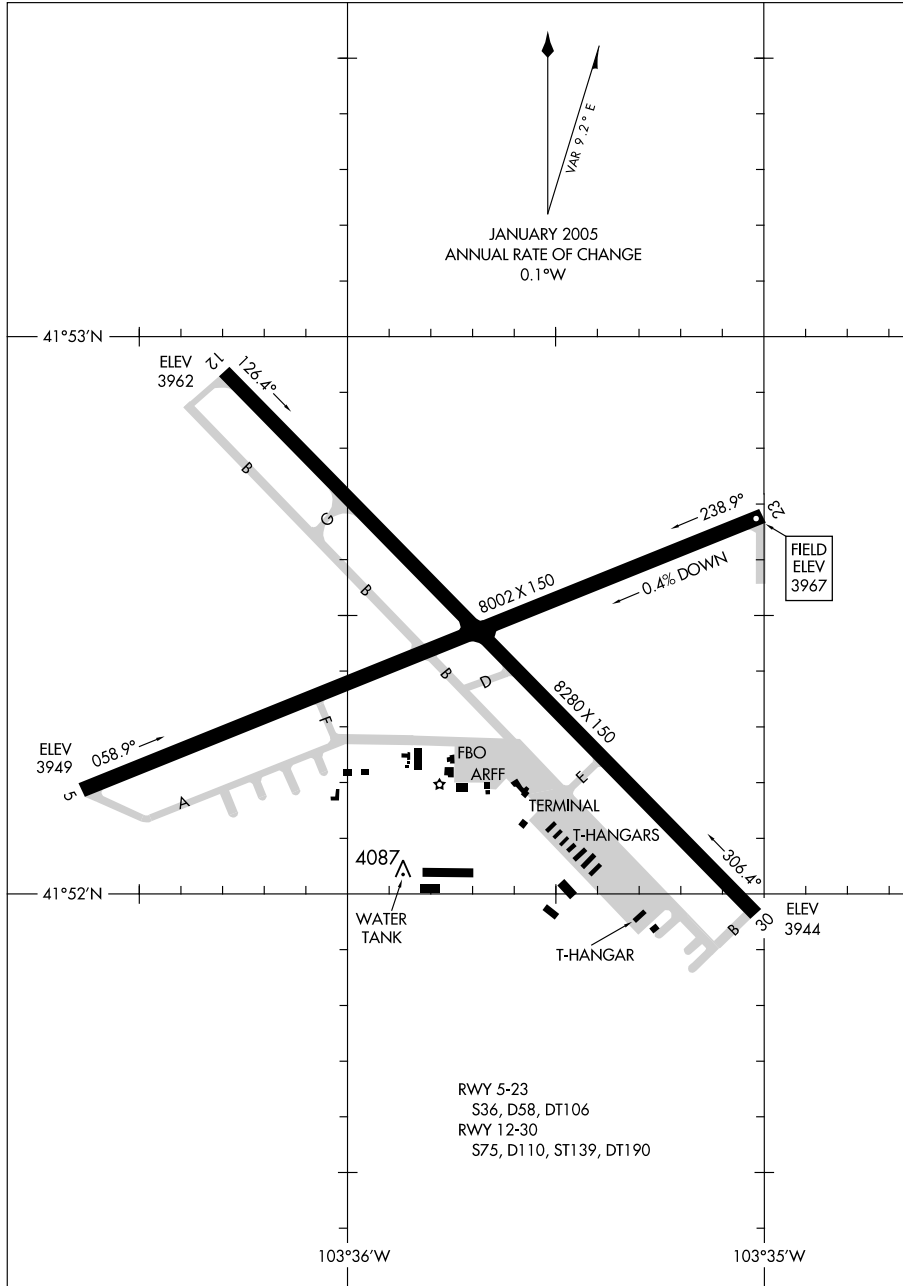

AIRPORT DIAGRAM

07298

SCOTTSBLUFF/
WESTERN NEBRASKA RGNL/WILLIAM B. HEILIG FIELD (B'F'F)

SCOTTSBLUFF, NEBRASKA


09239

AIRPORT DIAGRAM

SIOUX GATEWAY/COLONEL BUD DAY FIELD (SU^X)

AL-395 (FAA)

SIOUX CITY, IOWA

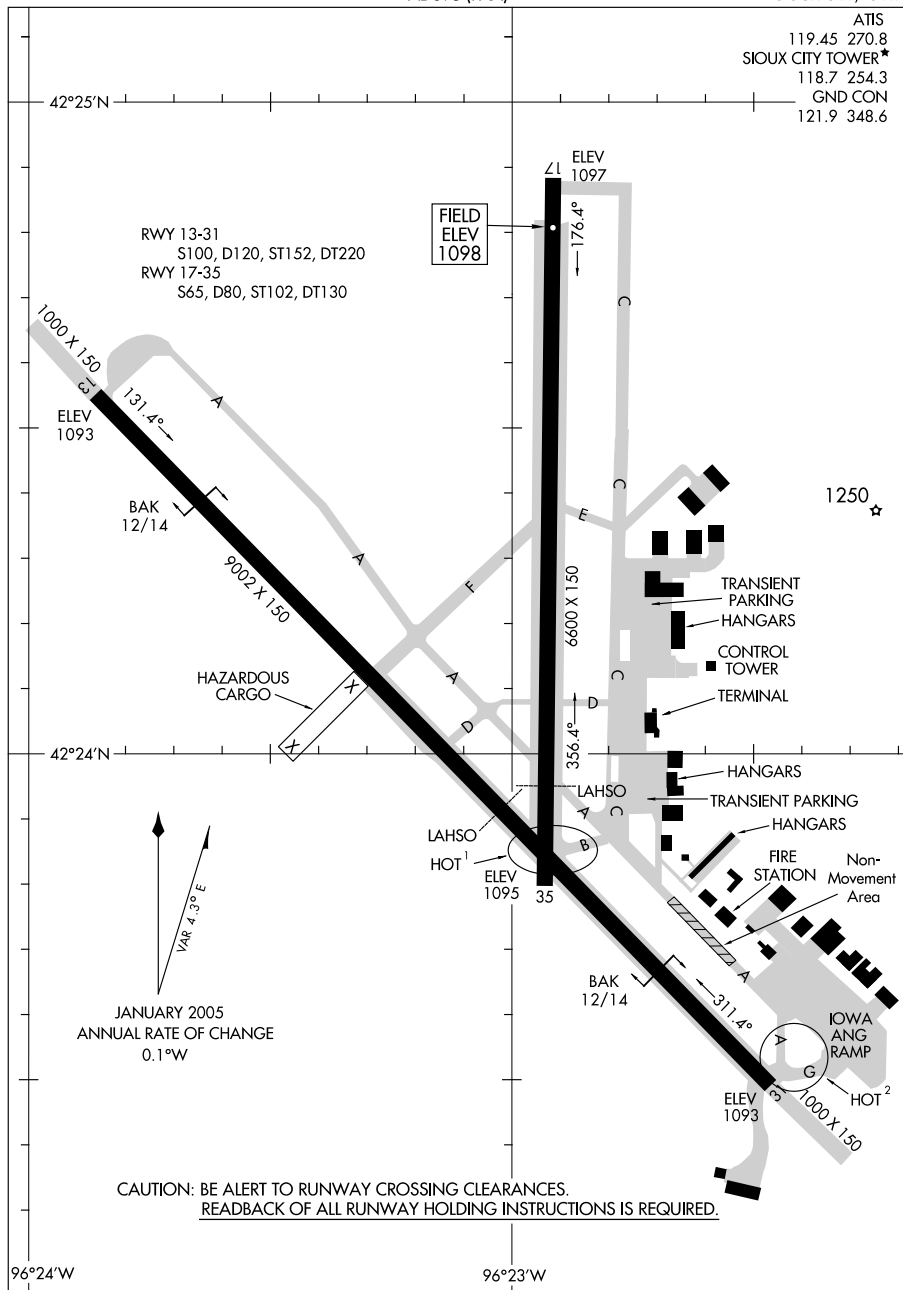

AIRPORT DIAGRAM

09239

SIOUX GATEWAY/COLONEL BUD DAY FIELD (SU^X)


SIOUX CITY, IOWA

10154

AIRPORT DIAGRAM

AL-396 (FAA)

SIoux FALLS/JOE FOSS FIELD (FSD)
SIoux FALLS, SOUTH DAKOTA

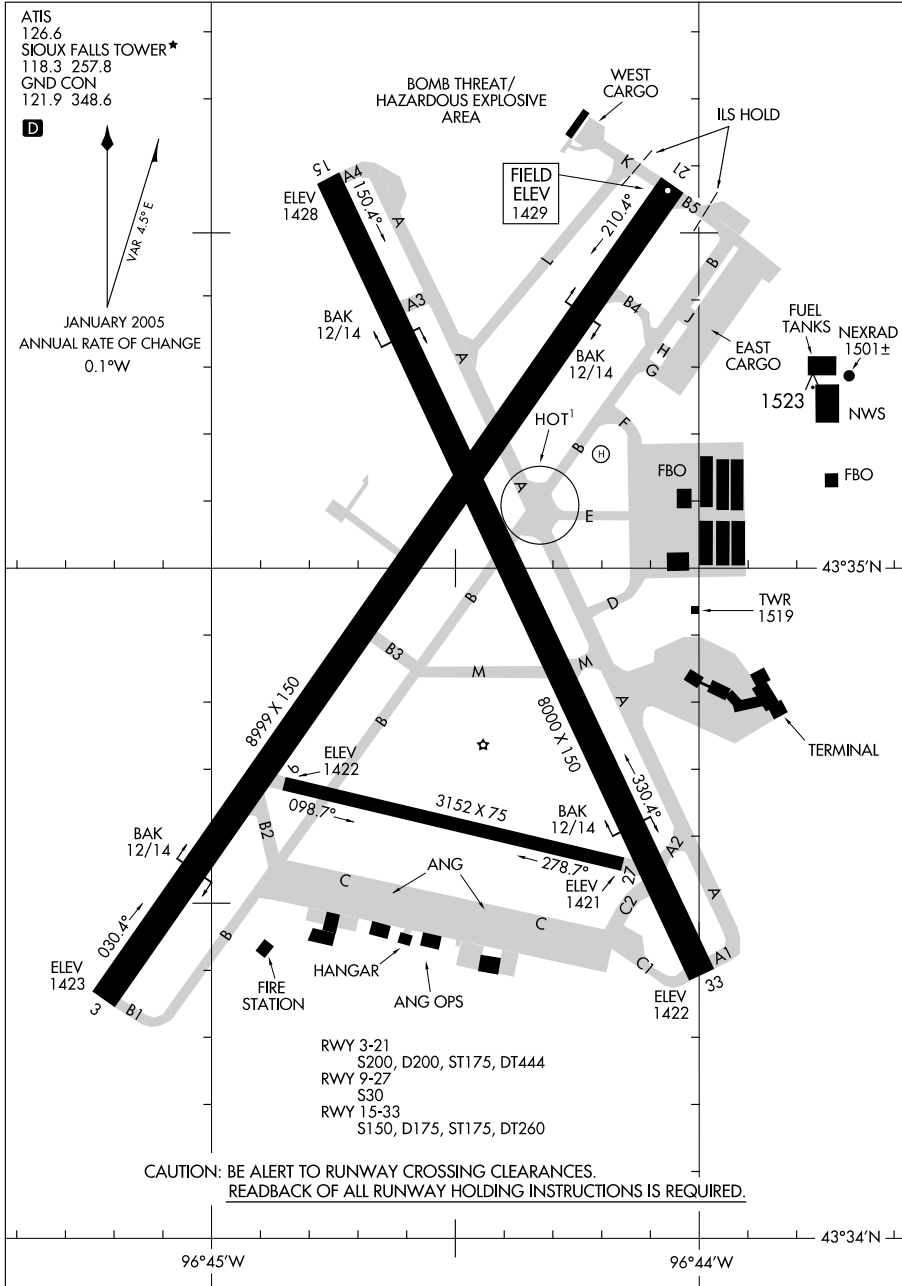

AIRPORT DIAGRAM

SIoux FALLS, SOUTH DAKOTA
SIoux FALLS/JOE FOSS FIELD (FSD)

10154


10042

AIRPORT DIAGRAM

AL-604 (FAA)

SPRINGFIELD-BRANSON NATIONAL (SGF)

SPRINGFIELD, MISSOURI

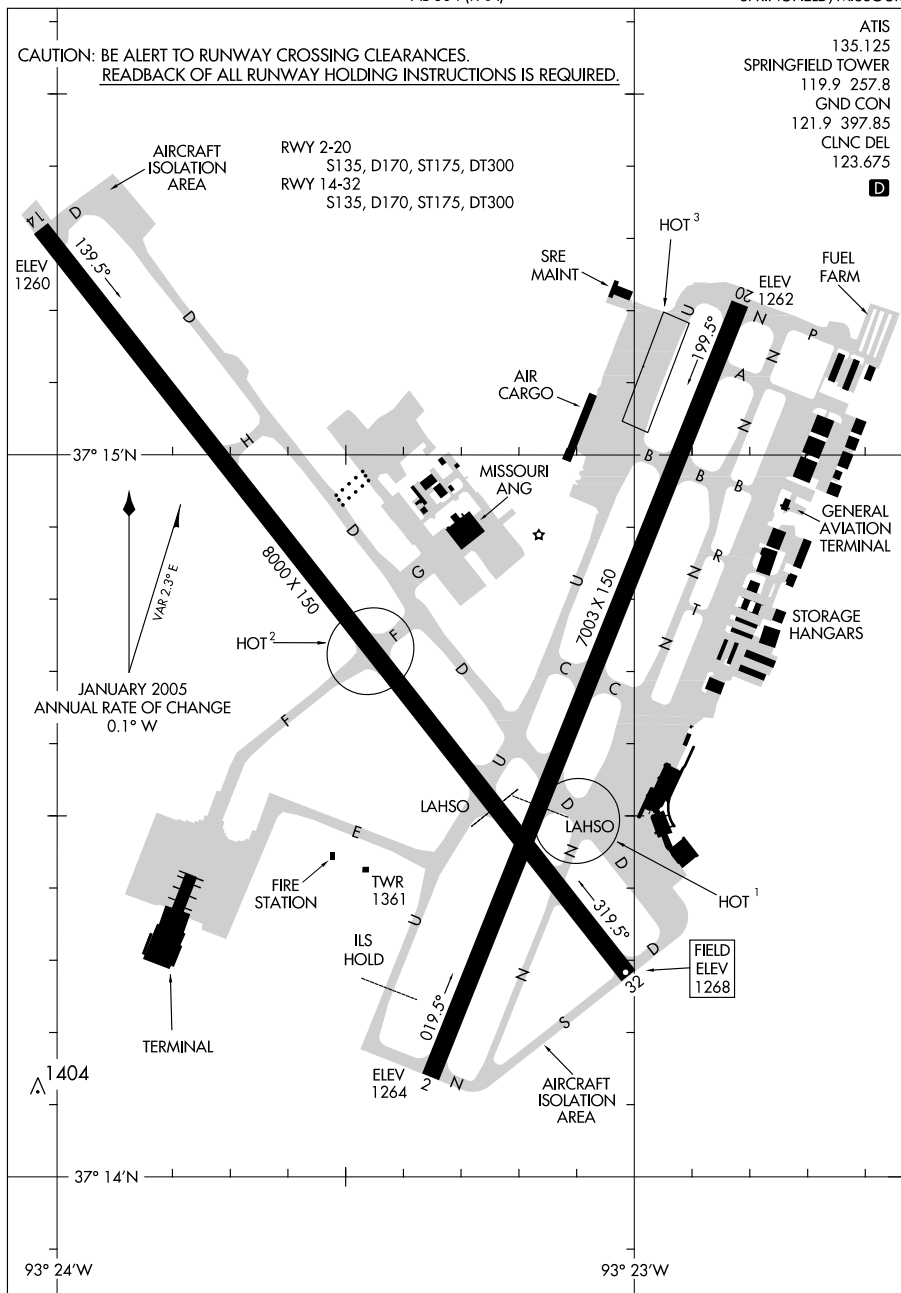

AIRPORT DIAGRAM

10042


SPRINGFIELD, MISSOURI
 SPRINGFIELD-BRANSON NATIONAL (SGF)

09351

AIRPORT DIAGRAM

AL-424 (FAA)

TOPEKA/FORBES FIELD (FOE)
TOPEKA, KANSAS

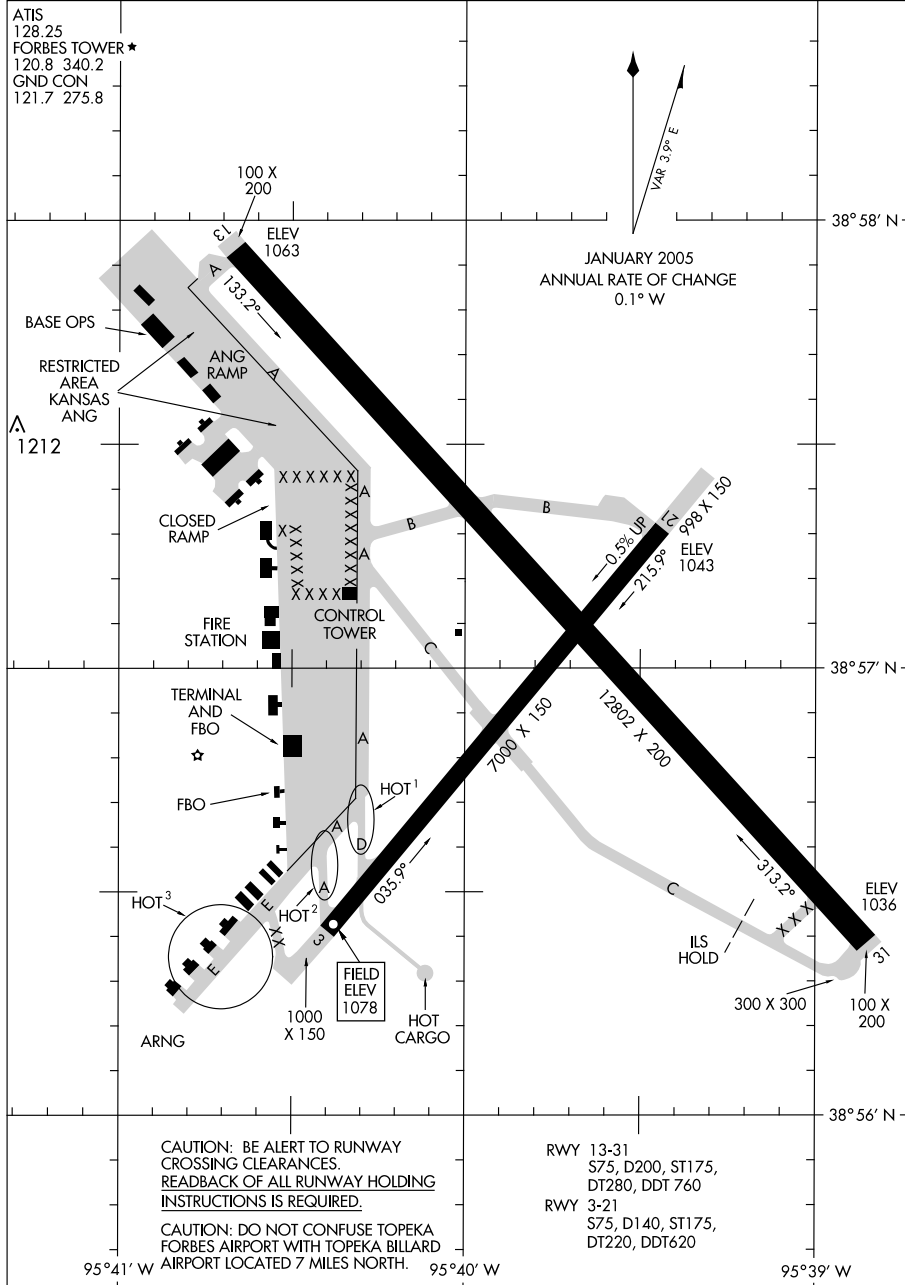

AIRPORT DIAGRAM


09351

TOPEKA, KANSAS
TOPEKA/FORBES FIELD (FOE)

09239

AIRPORT DIAGRAM

AL-620 (FAA)

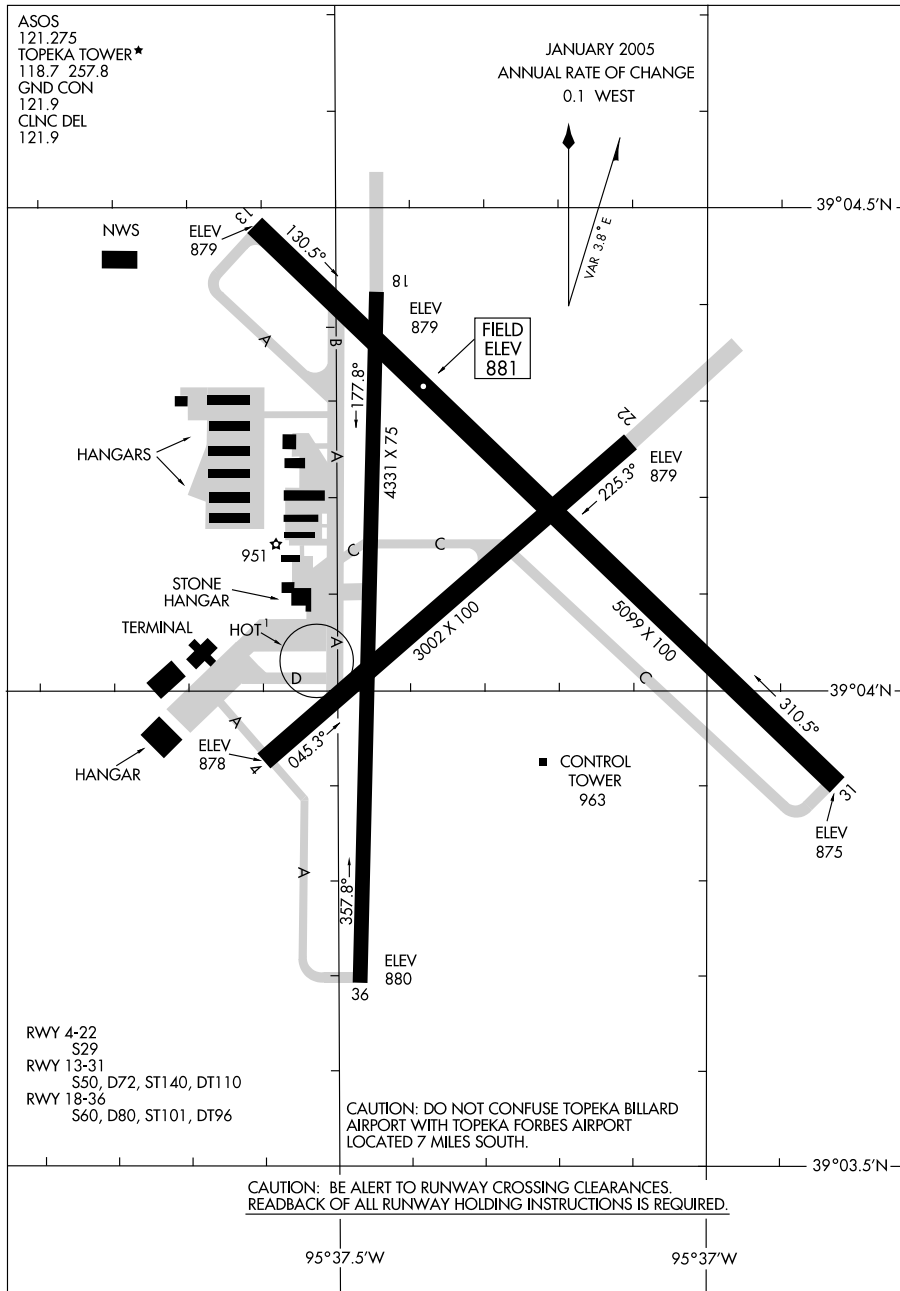TOPEKA/PHILIP BILLARD MUNI (TOP)
TOPEKA, KANSAS

AIRPORT DIAGRAM

09239

TOPEKA, KANSAS
TOPEKA/PHILIP BILLARD MUNI (TOP)

AIRPORT DIAGRAM

AL-945 (FAA)



WATERLOO, IOWA
WATERLOO RGNL (ALO)

09295


08325

AIRPORT DIAGRAM

AFD-496 [USAF]

WHITEMAN AFB (KSZL)

KNOB NOSTER, MISSOURI

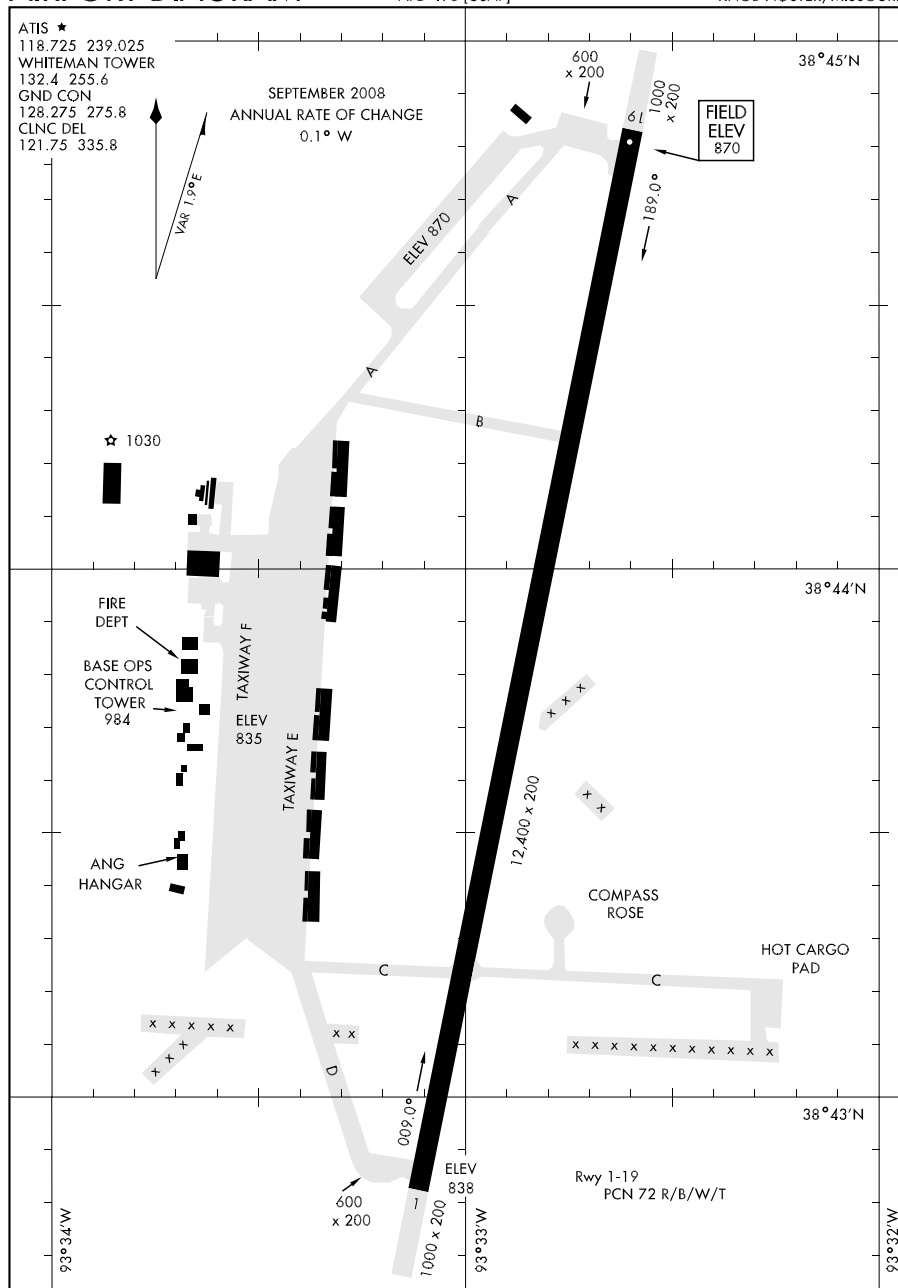


AIRPORT DIAGRAM

KNOB NOSTER, MISSOURI
WHITEMAN AFB (KSZL)

WICHITA MID-CONTINENT (ICT)
WICHITA, KANSAS



NATIONAL WEATHER SERVICE (NWS) UPPER AIR OBSERVING STATIONS (UAOS) AND WEATHER RADAR NETWORK

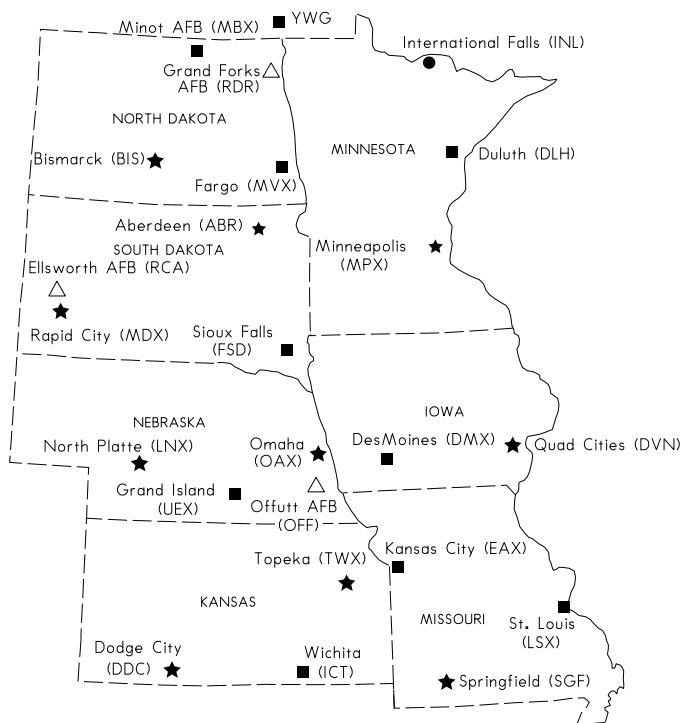


LEGEND

- △ AVIATION WEATHER SERVICE (MILITARY)
- ▲ AIR TRAFFIC CONTROL RADAR
- ★ UPPER AIR OBSERVING STATION/RADAR
- RADAR ONLY
- UAOS-BALLOON RELEASES AROUND 1100 UTC AND 2300 UTC DAILY
- OTHER NWS UPPER AIR STATIONS-BALLOON RELEASE TIMES ARE FLEXIBLE BUT GENERALLY AROUND SUNRISE AND/OR EARLY AFTERNOON

NOTE: FOR RELEASES LATER THAN 1130 UTC AND 2300 UTC, AND FOR SPECIAL RELEASES AT OTHER THAN THE SCHEDULED HOURS, AN AERONAUTICAL INFORMATION MESSAGE WILL BE FILED.

ENROUTE FLIGHT ADVISORY SERVICE (EFAS)

See Aeronautical Information Manual (AIM) for available services

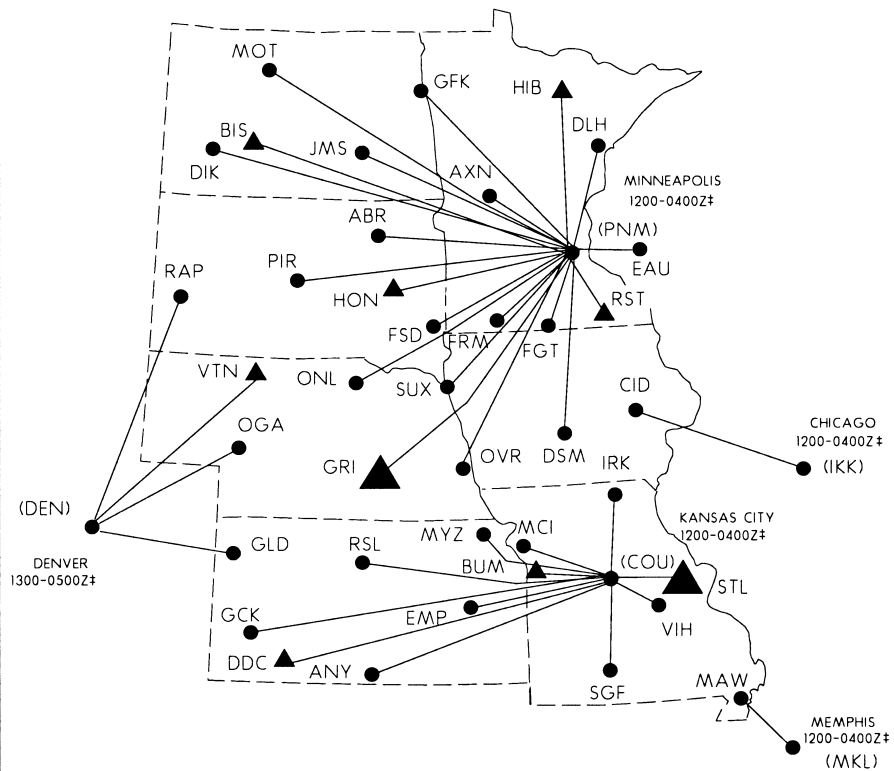

DENVER EFAS HIGH ALTITUDE FREQUENCY 124.675

KANSAS CITY EFAS HIGH ALTITUDE FREQUENCY 123.625

MINNEAPOLIS EFAS HIGH ALTITUDE FREQUENCY 135.675